


LLL185R71A224MA01#

Reflow OF © Complies with RoHS Recommended

< List of part numbers with package codes > LLL185R71A224MA01L , LLL185R71A224MA01K

Shape

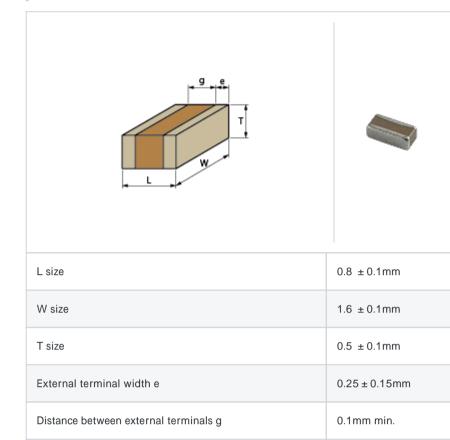

References

"#" indicates a package specification code.

| Packaging | Specifications | Minimum quantity |
|-----------|-----------------------|------------------|
| L | 180mm Embossed taping | 4000 |
| K | 330mm Embossed taping | 10000 |

| Mass (typ.) | | |
|-------------|-------|--|
| 1 piece | 3.9mg | |
| 180mm Reel | 100g | |

Specifications

Size code in inch(mm)

| Capacitance | $0.22 \mu F \pm 20\%$ |
|--|-----------------------|
| Rated voltage | 10Vdc |
| Temperature characteristics (complied standard) | X7R(EIA) |
| Capacitance change rate | ± 15.0% |
| Temperature range of temperature characteristics | -55 to 125 |
| Operating temperature range | -55 to 125 |

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.


0306 (0816)




URL : http://www.murata.co.jp/

Last updated: 2013/11/16







DC bias characteristics




Capacitance - temperature characteristics




S parameter (Smith chart S11)



AC voltage characteristics



Calorific property by ripple current



This PDF data has only typical specifications because there is no space for detailed specifications.

Therefore, please reviewour product specifications or consult the approval sheet for product specifications before ordering.

