

LQH2HPN150MGR#

“ # ” indicates a package specification code.

Recommended

New

General

Wound
(Shield)
000

LowRdc



Thickness
1.0mm
max.

Reflow
OK

RoHS

< List of part numbers with package codes >
LQH2HPN150MGRL

Shape

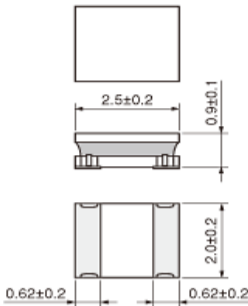

(in mm)

L size	2.5 ± 0.2mm
W size	2.0 ± 0.2mm
T size	0.9 ± 0.1mm
Size code in inch (mm)	1008 (2520)

Notes

When Rated Current is applied to the Products, more than the value which is 30% down from minimum rated Inductance value and self temperature rise will be 40 or less.
Keep the product under 125 (ambient temperature plus self-generation of heat).

References

Packaging code	Specifications	Minimum quantity
L	180mm Embossed taping	3000

Mass (Typ.)	
1 piece	0.019g


Specifications

Inductance	15μH ± 20%
Inductance test frequency	1MHz
Rated current (Isat) (Based on Inductance change)	570mA
Rated current (Itemp) (Based on Temperature rise)	560mA
Max. of DC resistance	1.11
Avg. of DC resistance	0.925 ± 20%
Self resonance frequency (min.)	20MHz
Operating temperature range (Self-temperature rise is not included)	-40 ~ 85
Class of magnetic shield	Magnetic shield of magnetic powder in resin


⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ’ s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

▪ Inductance-Frequency characteristics (Typ.)

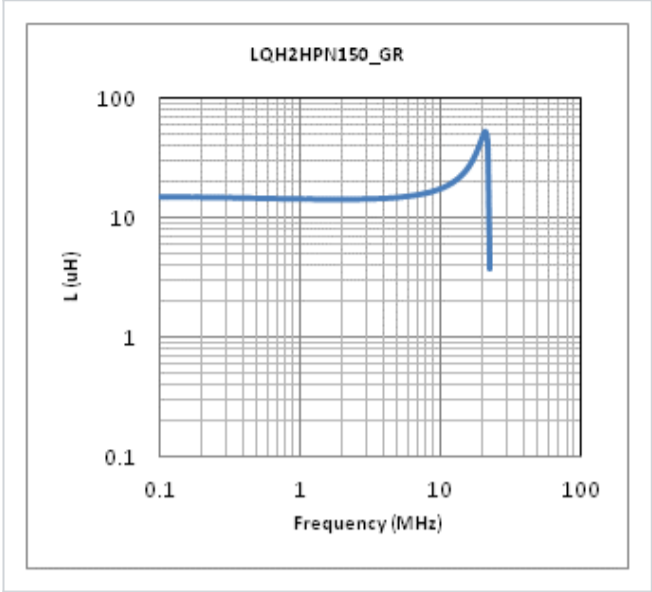

▪ Inductance-Current characteristics (Typ.)

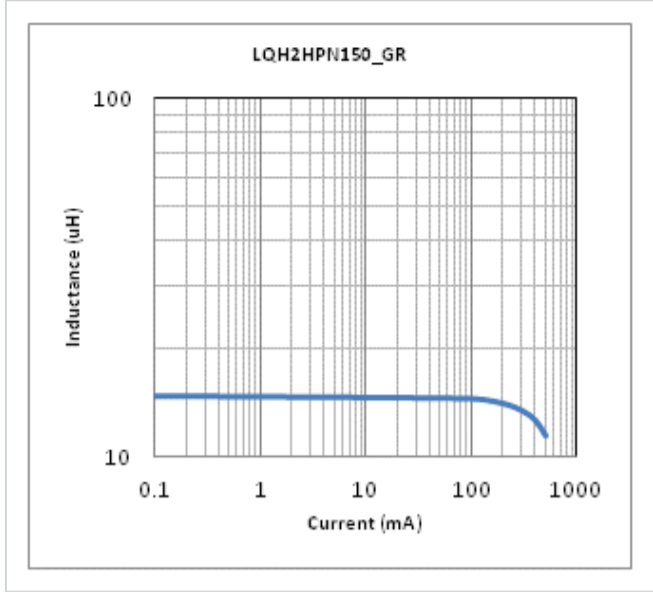

▪ Temperature rise characteristics (Typ.)

