








SMT POWER INDUCTORS

Power Beads - PA2983.XXXHL Series

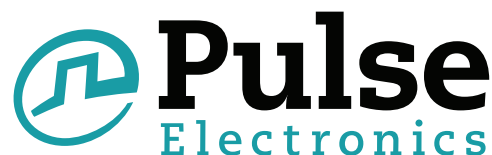

-  **Current Rating:** Over 24Apk
-  **Inductance Range:** 65nH
-  **Height:** 4.0mm Max
-  **Footprint:** 4.0mm x 5.0mm Max
-  **Halogen Free**

Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C ⁷




| Part Number | Inductance ¹ @ 0Adc (nH +/- 15%) | Inductance @ Irated (nH TYP) | Irated ² (Adc) | DCR ³ (mΩ nominal) | Saturation Current ⁴ (A TYP) | | Heating Current (A TYP) |
|---------------|---|------------------------------------|------------------------------|----------------------------------|--|-------|----------------------------|
| | | | | | 25°C | 100°C | |
| PA2983.650HLT | 65 | 60 | 24 | 0.33 +/- 10% | 29.5 | 24 | 30+ |

NOTES:

- Inductance measured at 100kHz, 100mVrms.
- The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- The nominal DCR is measured from point (a) to point (b), as shown below on the mechanical drawing.
- The saturation current is the typical current which causes the inductance to drop by 20% at the stated ambient temperatures (25°C, 100°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current is the DC current which causes the part temperature to increase by approximately 40°C when used in a typical application.
- In high volt*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the coreloss and temperature rise curves can be used.
- The "T" suffix indicates the part is shipped in tape and reel packaging. Pulse complies to the industry standard type and reel specification EIA481. The tape and reel for this product has a width (W=12mm), pitch (Po=0.8mm) and depth (Ko=12mm).
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.

Mechanical

Schematic


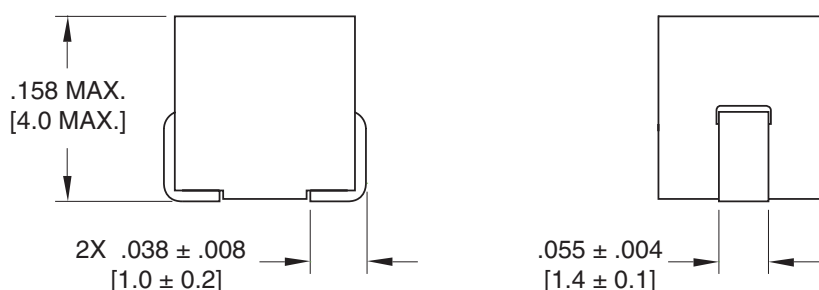

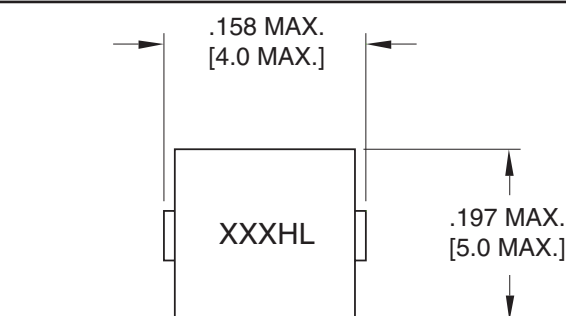


Weight 0.8 grams
Tape & Reel 1200/reel

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified,
 all tolerances are $\pm \begin{smallmatrix} .010 \\ 0.25 \end{smallmatrix}$


SMT POWER INDUCTORS

Power Beads - PA2983.XXXHL Series

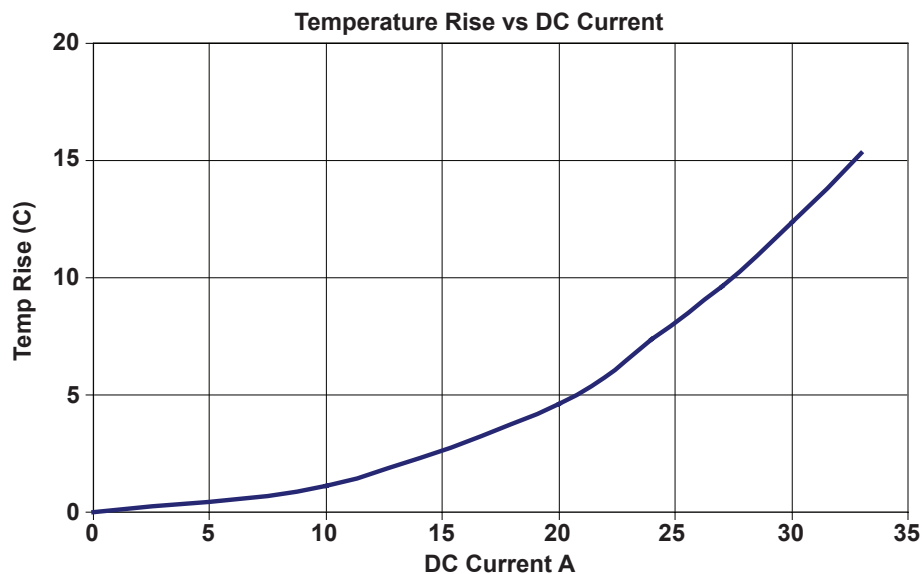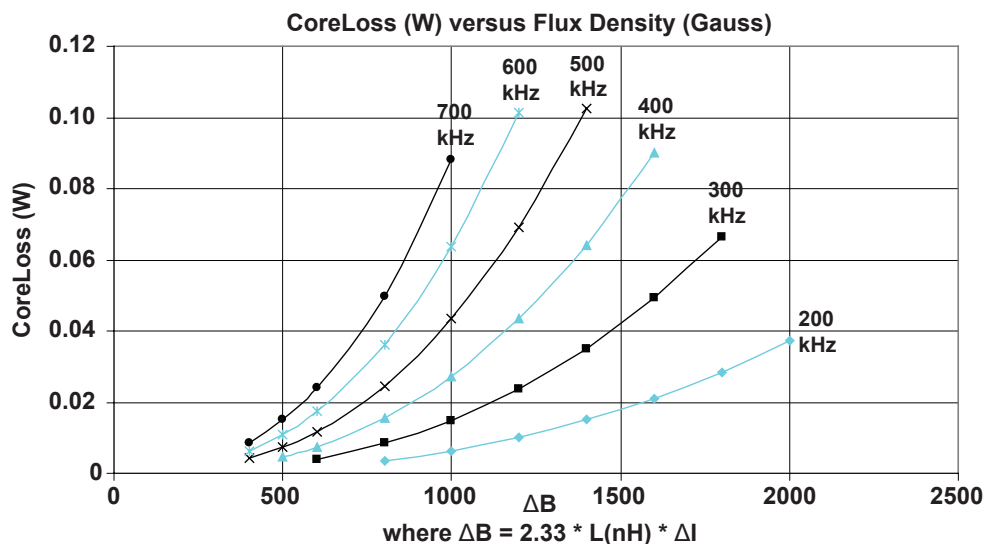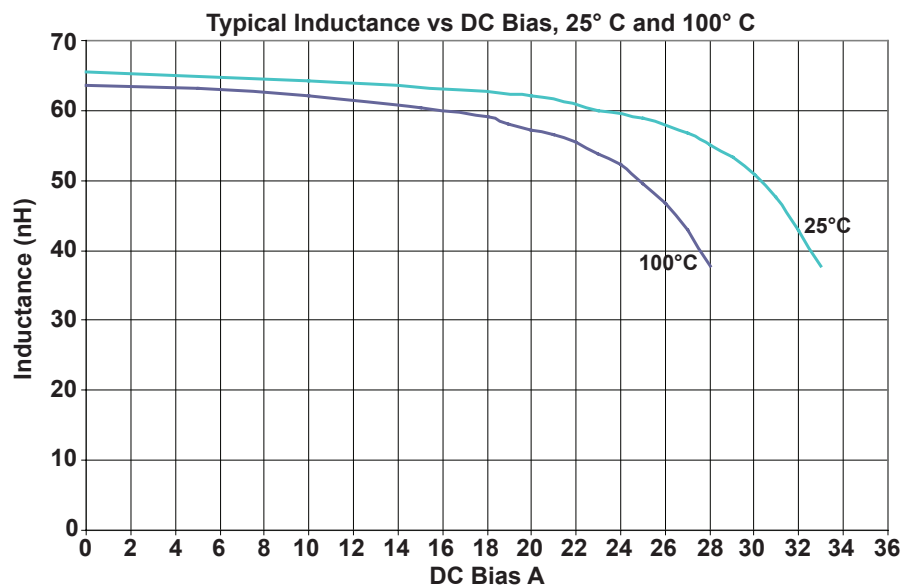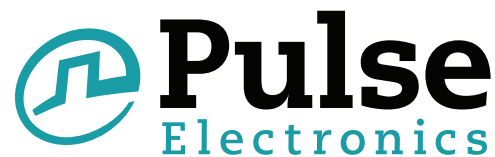

SMT POWER INDUCTORS

Power Beads - PA2983.XXXHL Series

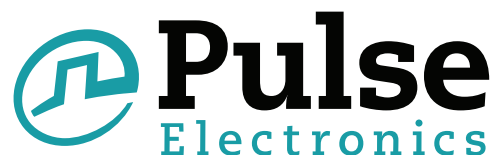

For More Information:

| Pulse North American Headquarters | Pulse European Headquarters | Pulse China Headquarters | Pulse North China | Pulse South Asia | Pulse North Asia |
|--|--|---|--|---|--|
| 12220 World Trade Dr. San Diego, CA 92128 U.S.A. | Einsteinstrasse 1 D-71083 Herrenberg Germany | B402, Shenzhen Academy of Aerospace Technology Bldg. 10th Kejinan Rd. High-Tech Zone Nanshan District Shenzen, PR China 518057 | Room 1503 XinYin Building No. 888 YiShan Rd. Shanghai 200233 China | 150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 | No. 26 Kao Ching Rd. Yang Mei Chen Taoyuan Hsien Taiwan, R. O. C. 32667 |
| TEL: 858 674 8100 FAX: 858 674 8262 | TEL: 49 7032 7806 0 FAX: 49 7032 7806 12 | TEL: 86 755 33966678 FAX: 86 755 33966700 | TEL: 86 21 32181071 FAX: 86 21 32181396 | TEL: 65 6287 8998 FAX: 65 6280 0080 | TEL: 886 3 4643715 FAX: 886 3 4641911 |

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. Pulse and the Squarewave logo are trademarks of Pulse Electronics Corporation, registered in the U.S. and other countries. © Copyright, 2011. Pulse Electronics Corporation. All rights reserved.