



DATE	SYM.	DESCRIPTION	DR	CK	REL

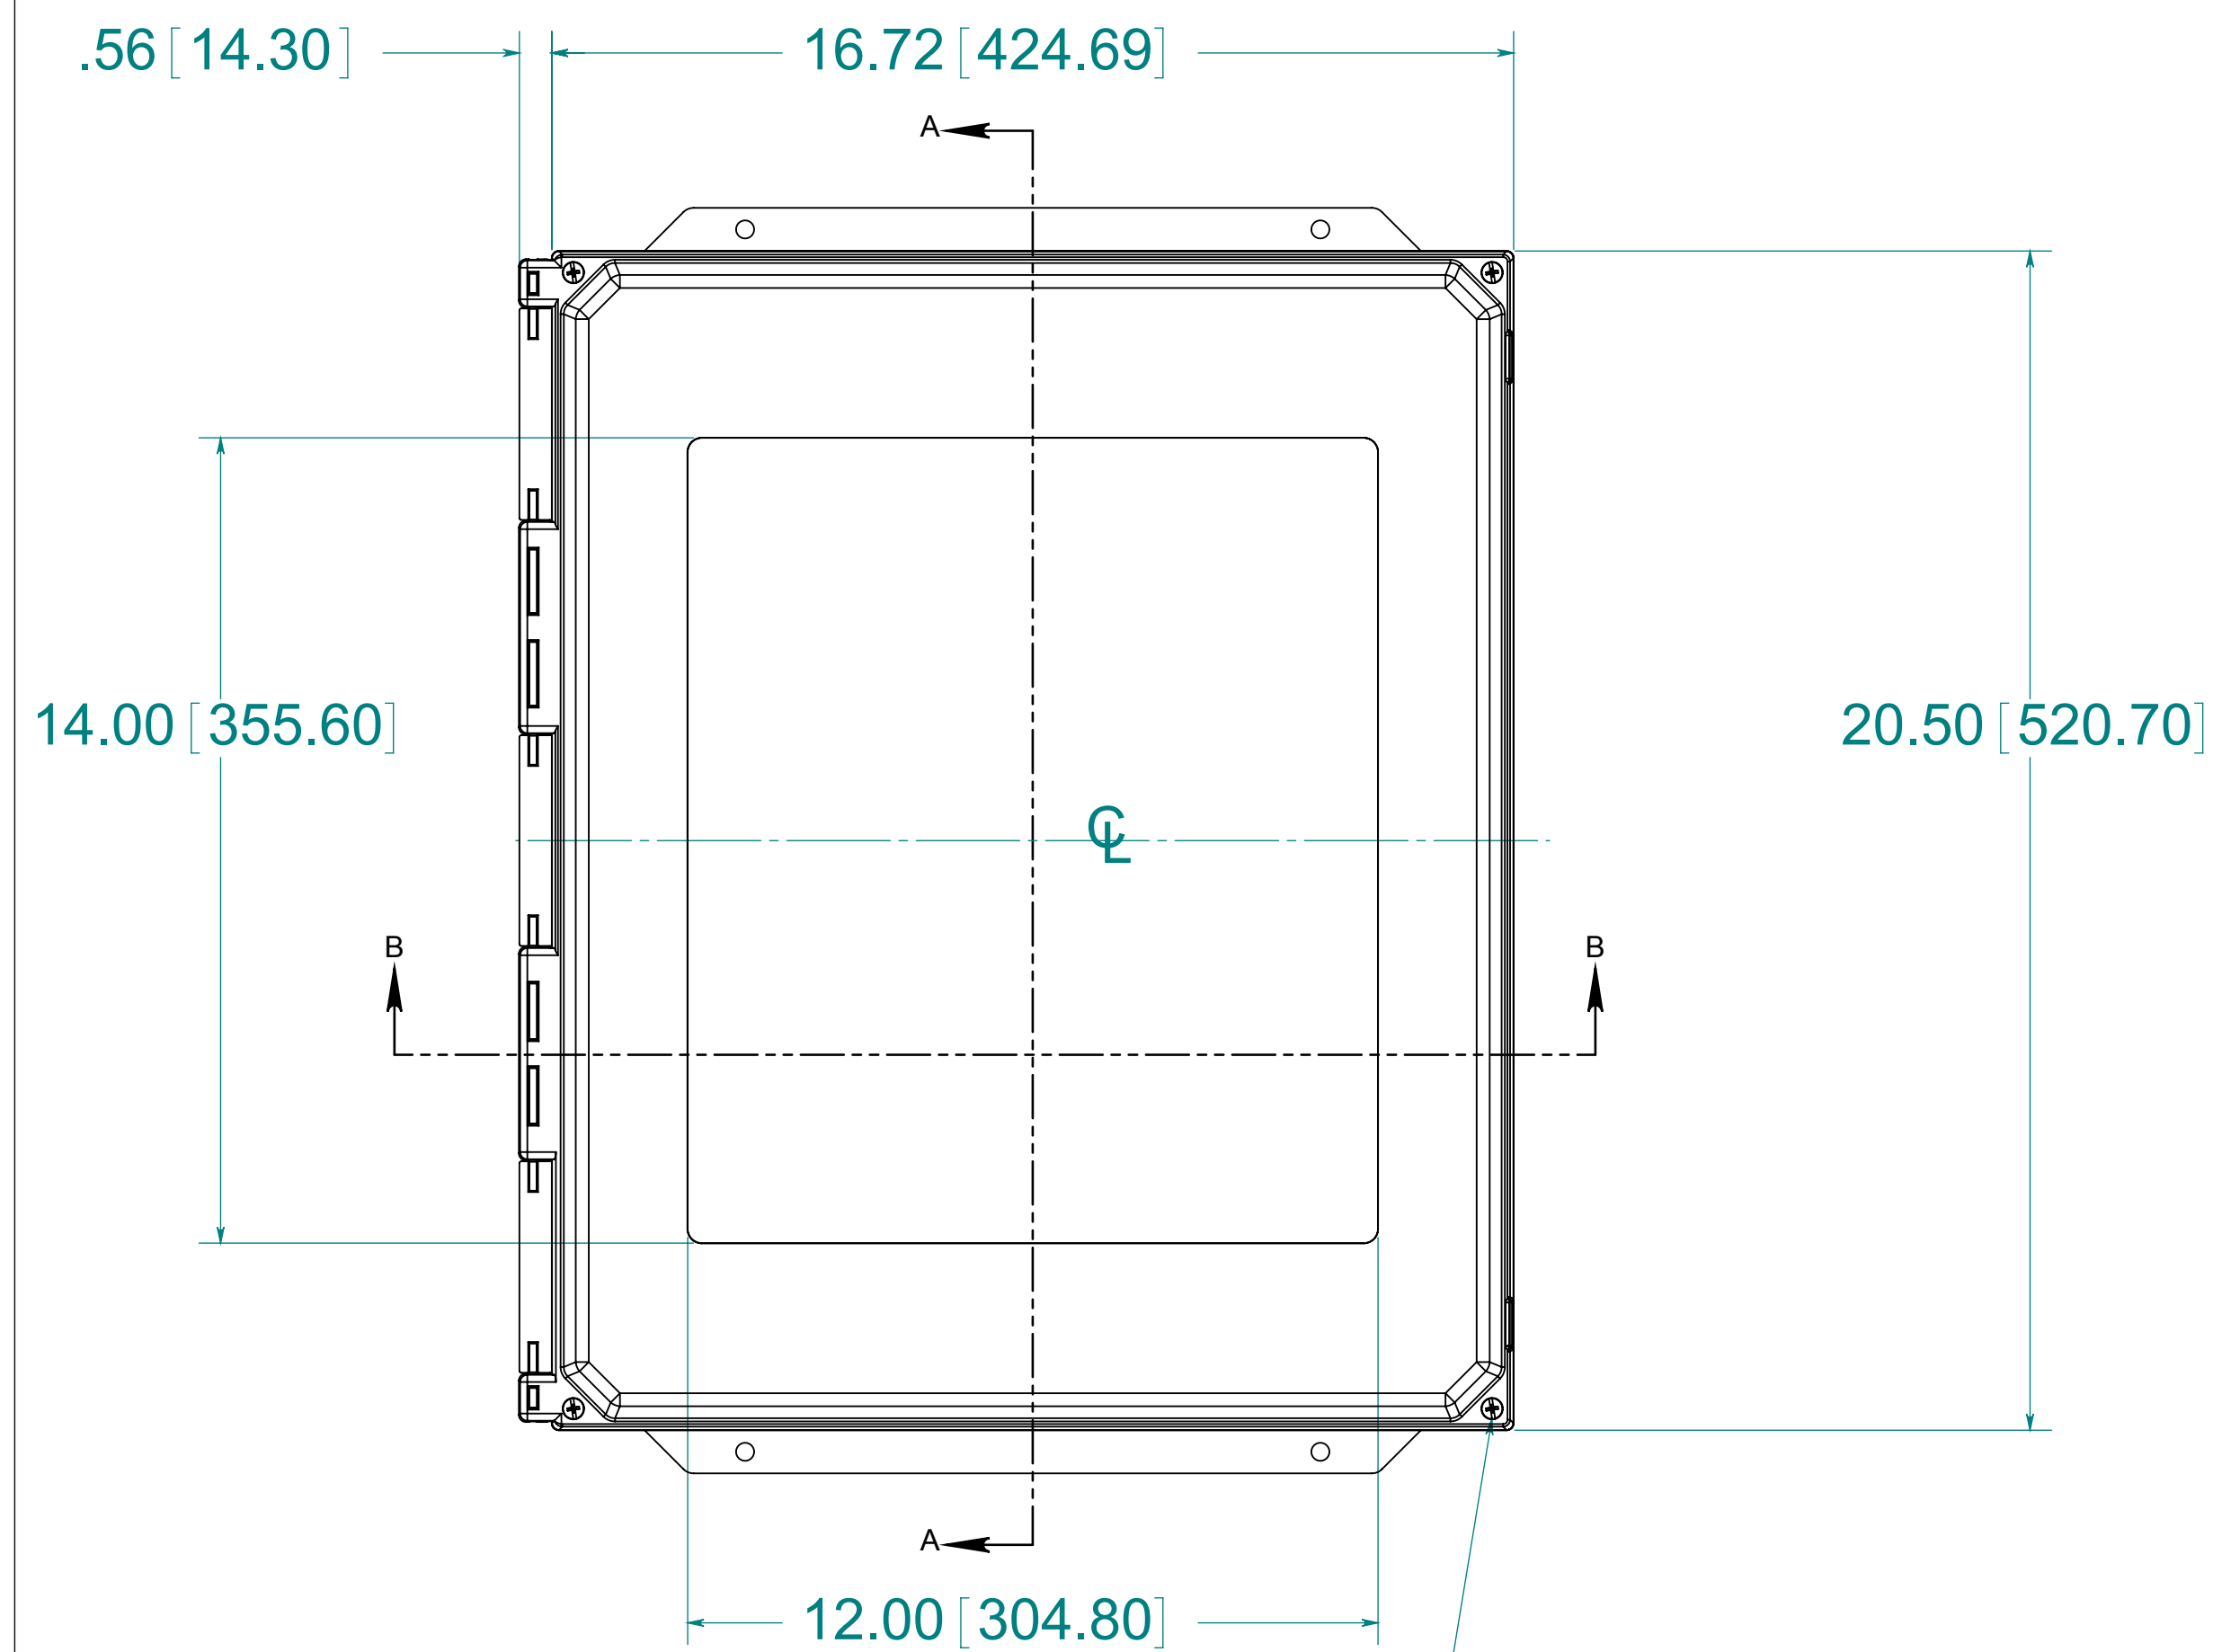

(4) EACH #10-32 BRASS INSERTS
AND STAINLESS STEEL
CAPTIVE COVER SCREWS
WITH RETAINING O-RING


CLOSED CELL
NEOPRENE
GASKET

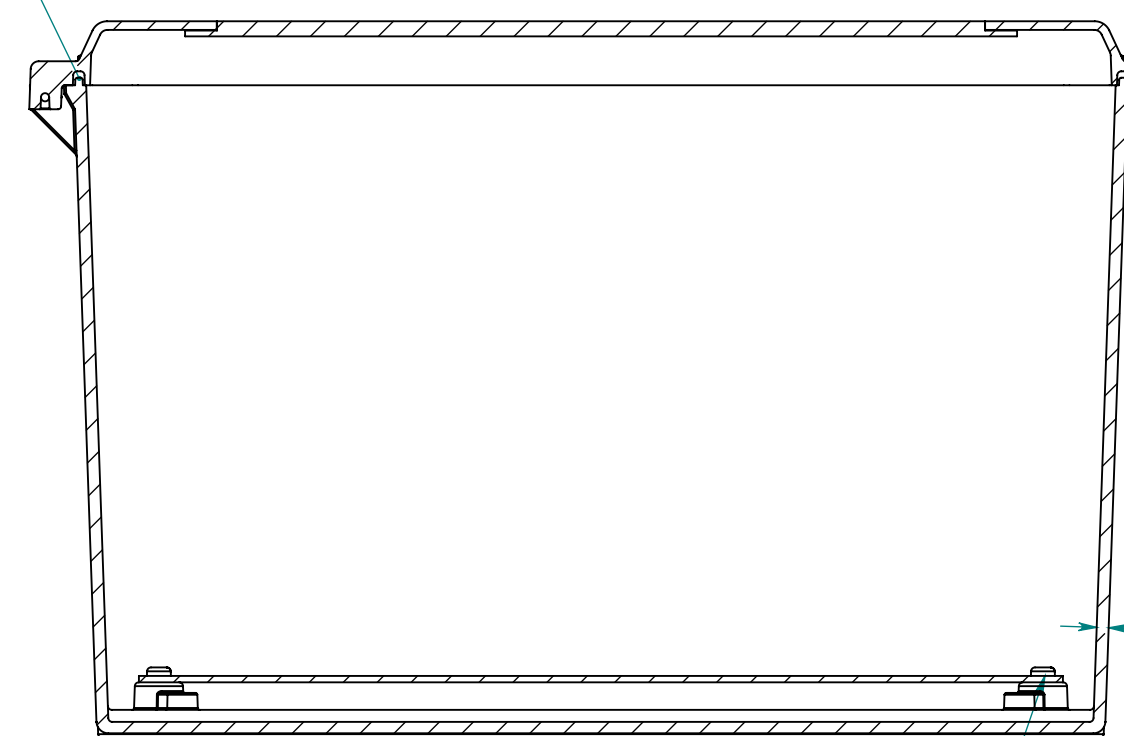

SECTION B-B

(4) EACH #10-32 BRASS
INSERTS AND PLATED
CARBON STEEL SCREWS

MATERIAL:
BOX- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
COVER- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
WINDOWS- POLYCARBONATE

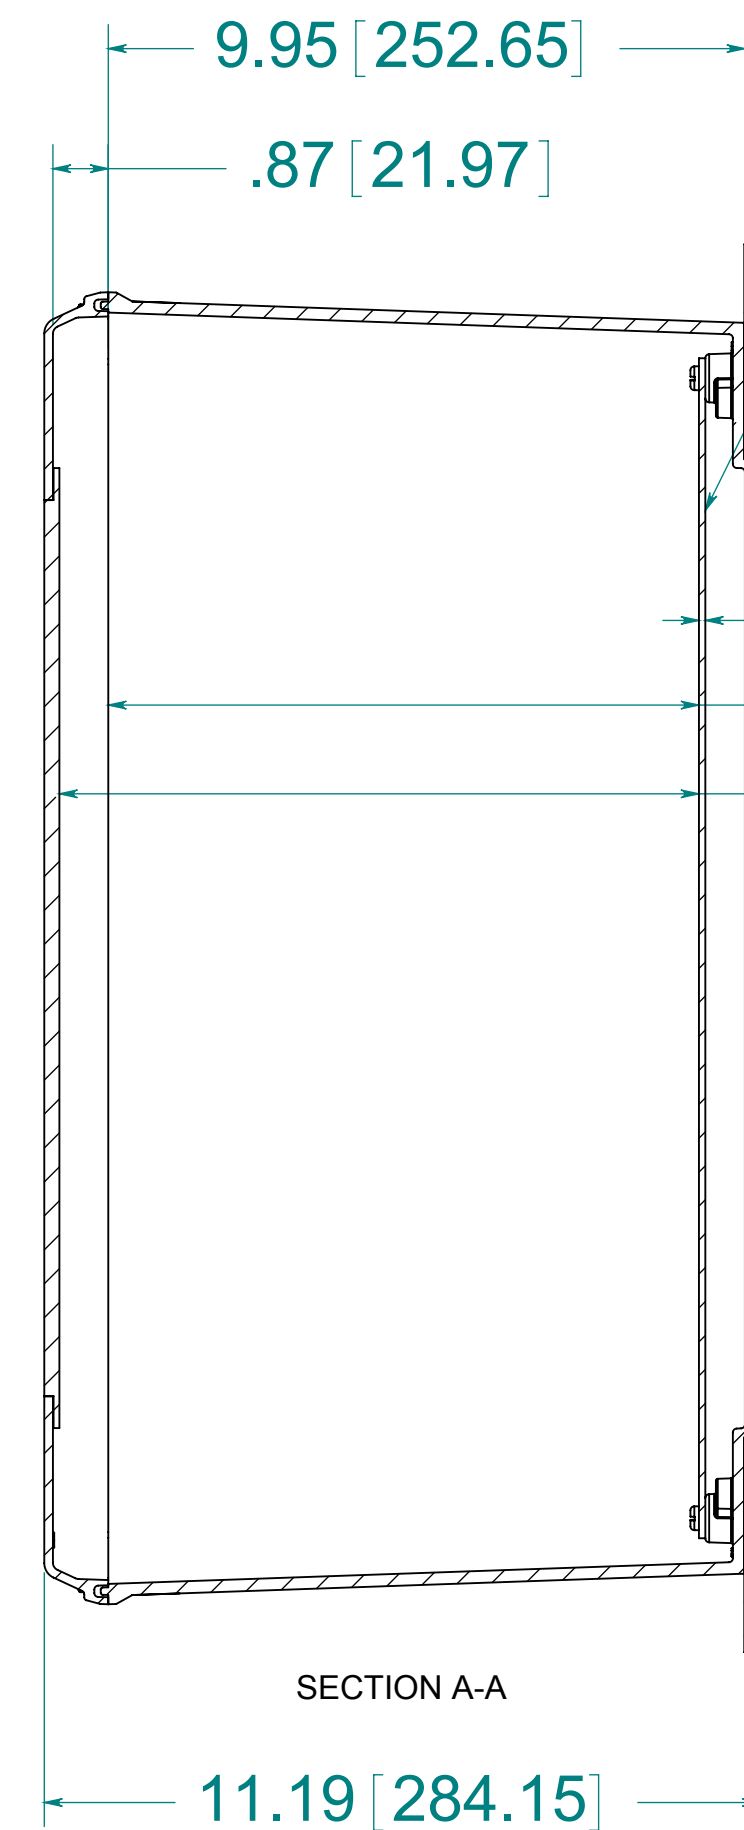

SECTION A-A


OPTIONAL BACK PANEL
0.100 [2.54] TH'K- ALUMINUM
0.075 [1.91] TH'K- WHITE STEEL & GALVANNEALED
0.125 [3.18] TH'K- FIBERGLASS

(2) POLYCARBONATE
FLANGES (GLUED)



(4) EACH #10-32 BRASS
INSERTS, AND STAINLESS
STEEL FLANGE AND
FEET SCREWS

(4) ϕ .31 [7.95]

BACK VIEW

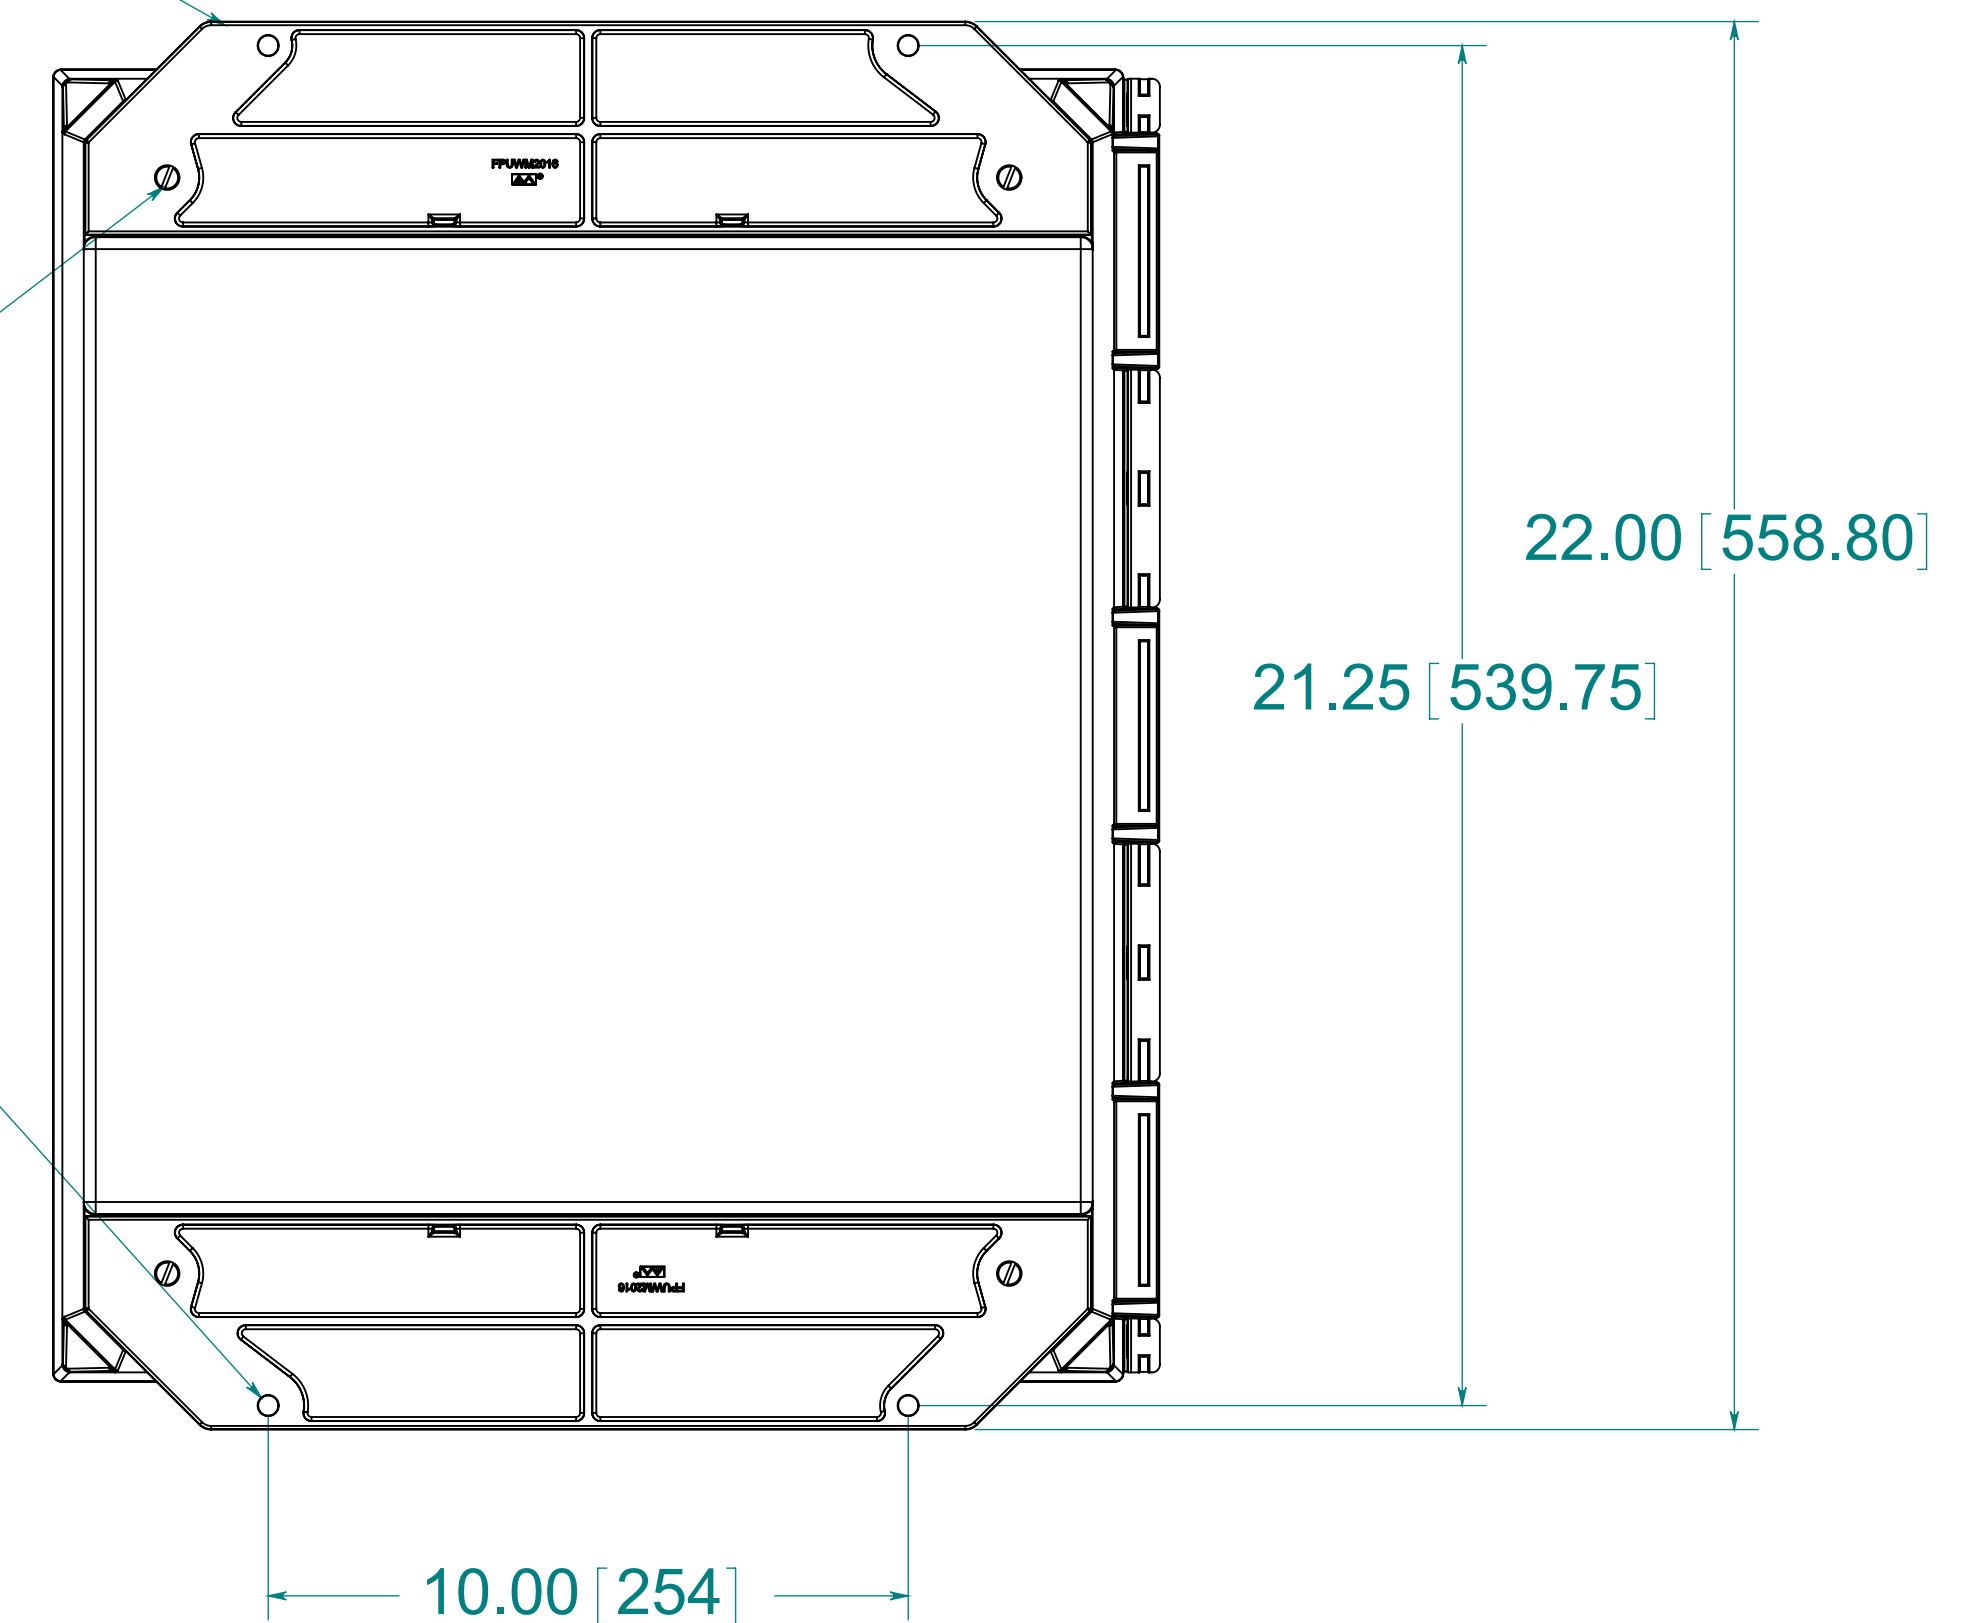

FRONT VIEW
WITH COVER REMOVED
AND BACK PANEL DISPLAYED

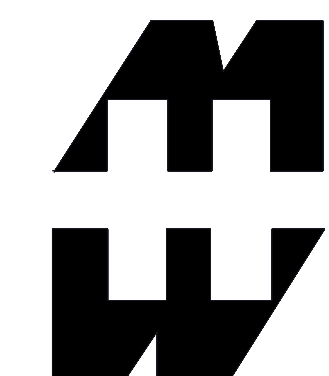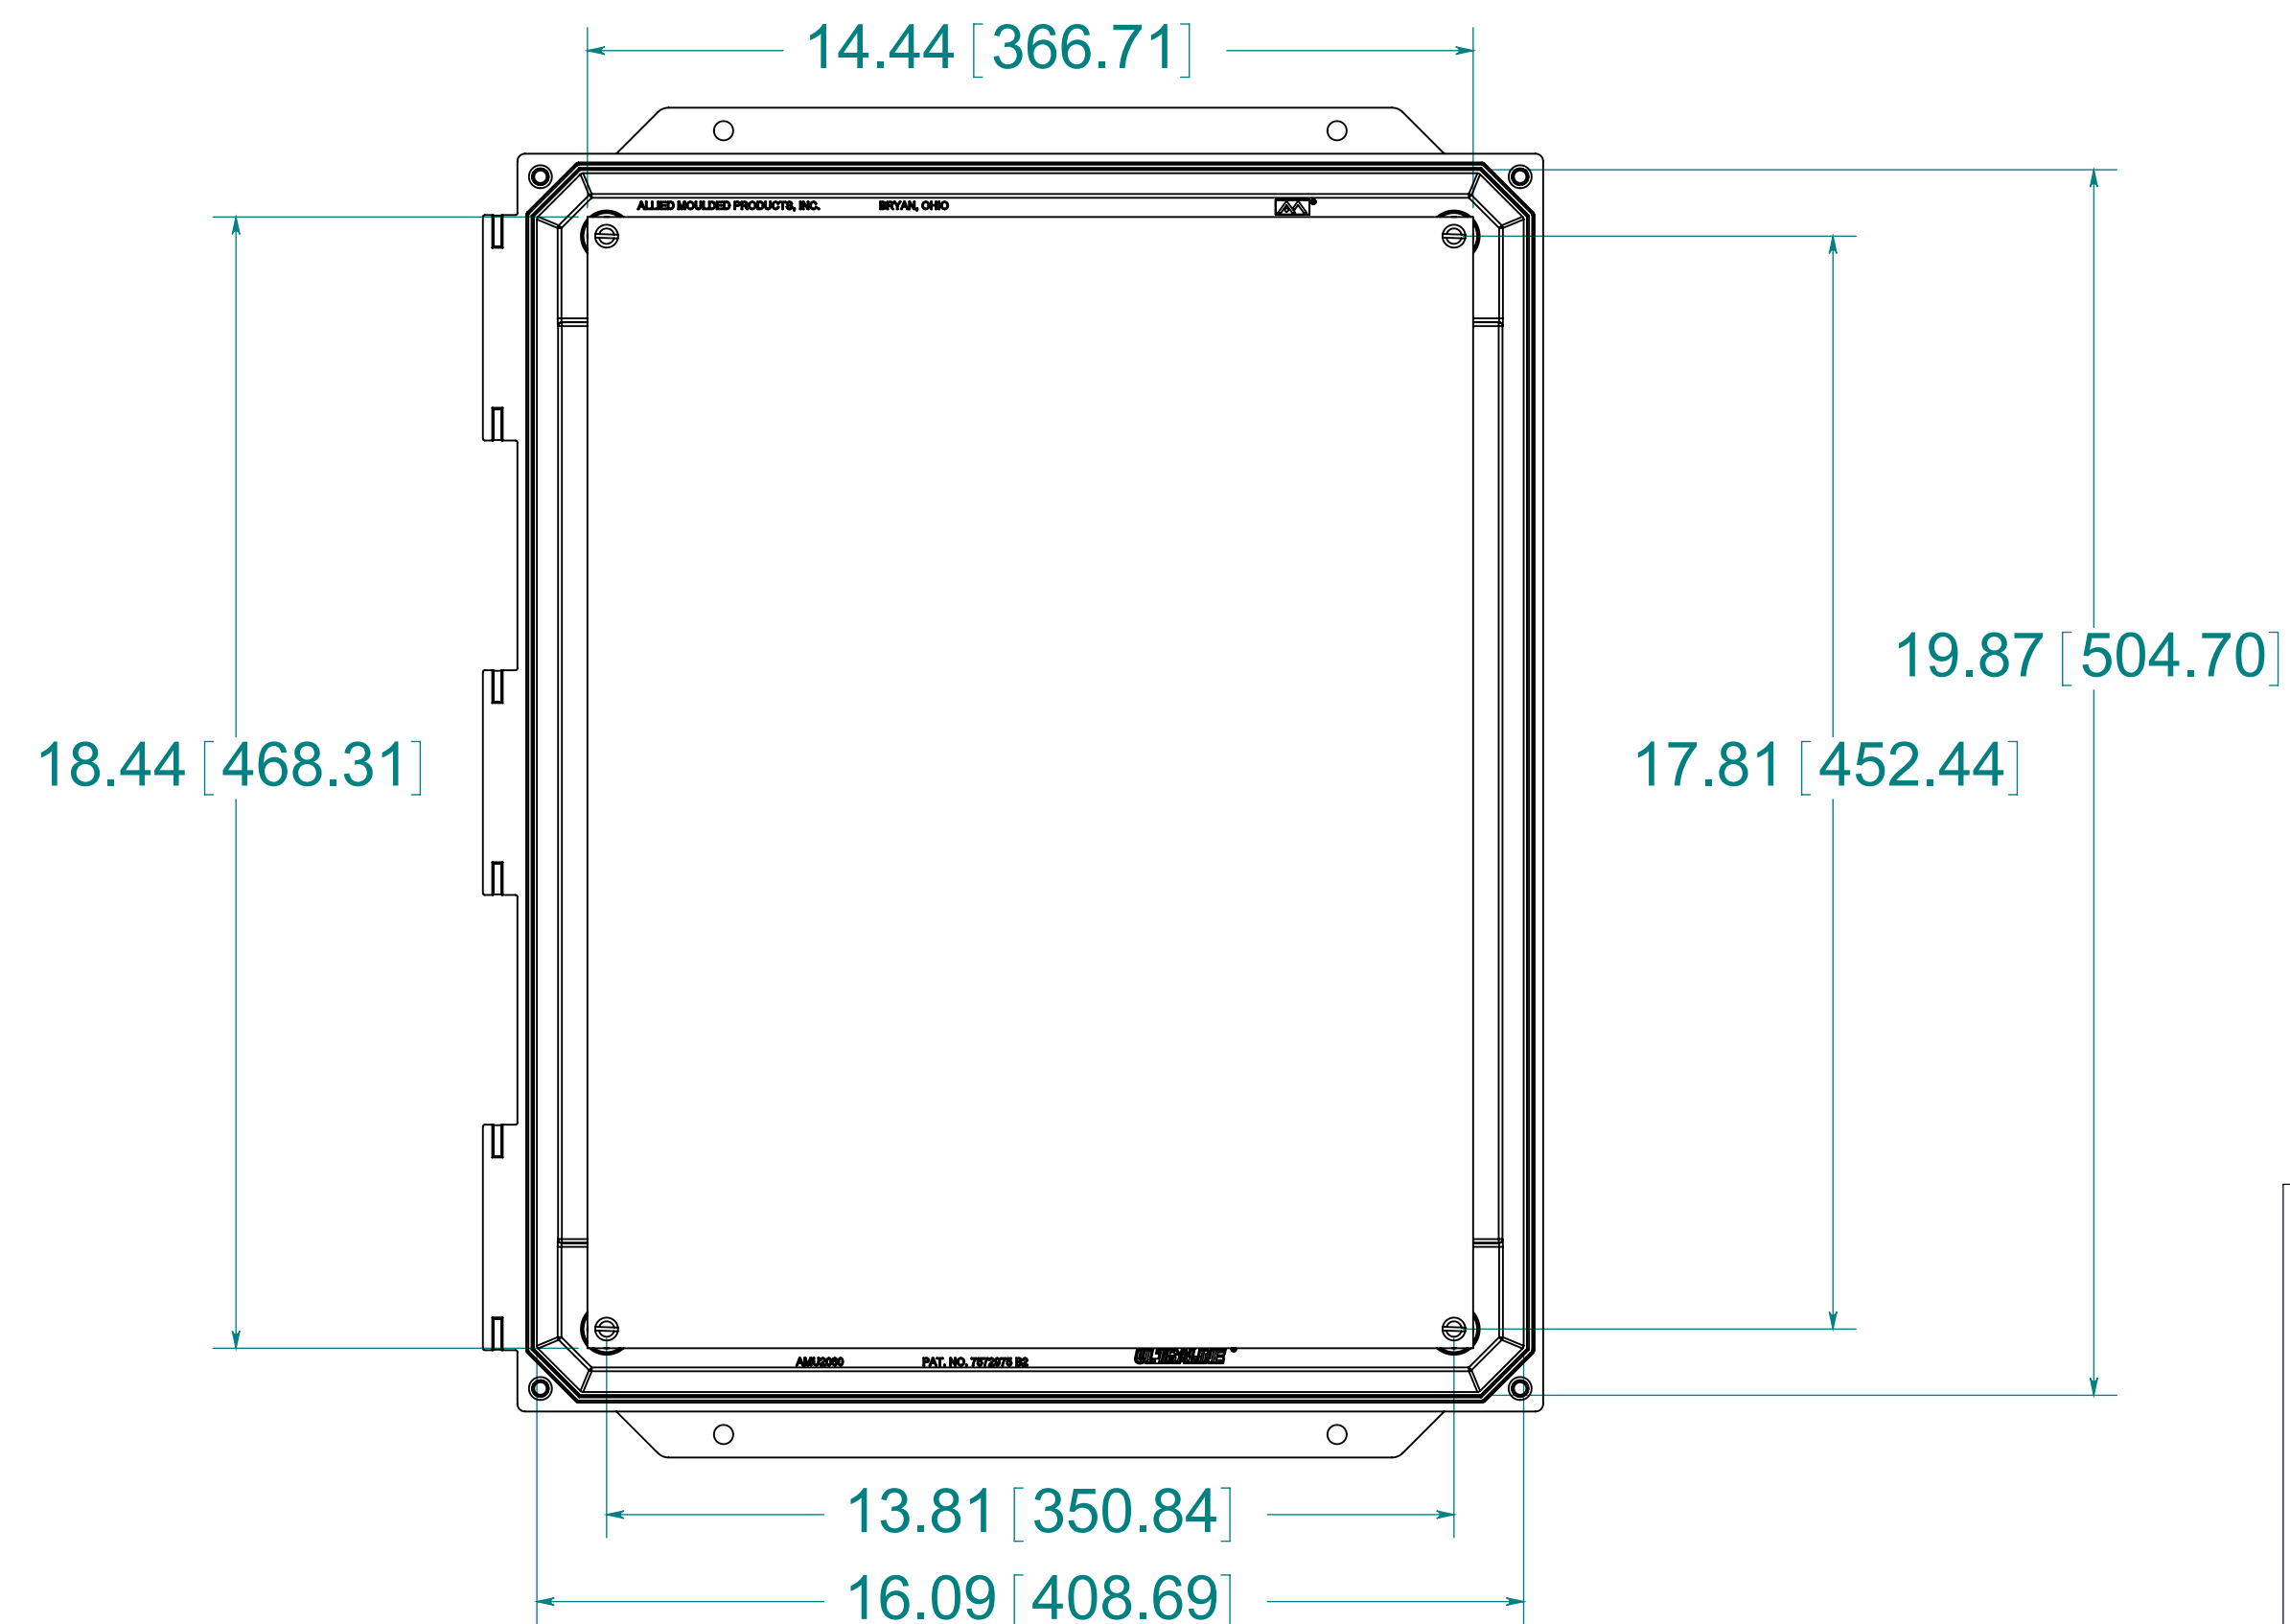

PART No. PJU2060WF
for more information visit
www.hammfg.com
Data subject to change without notice
Drawing Not to Scale