

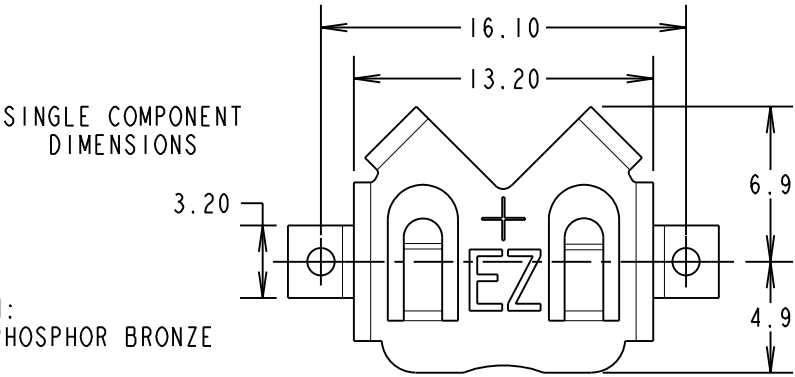
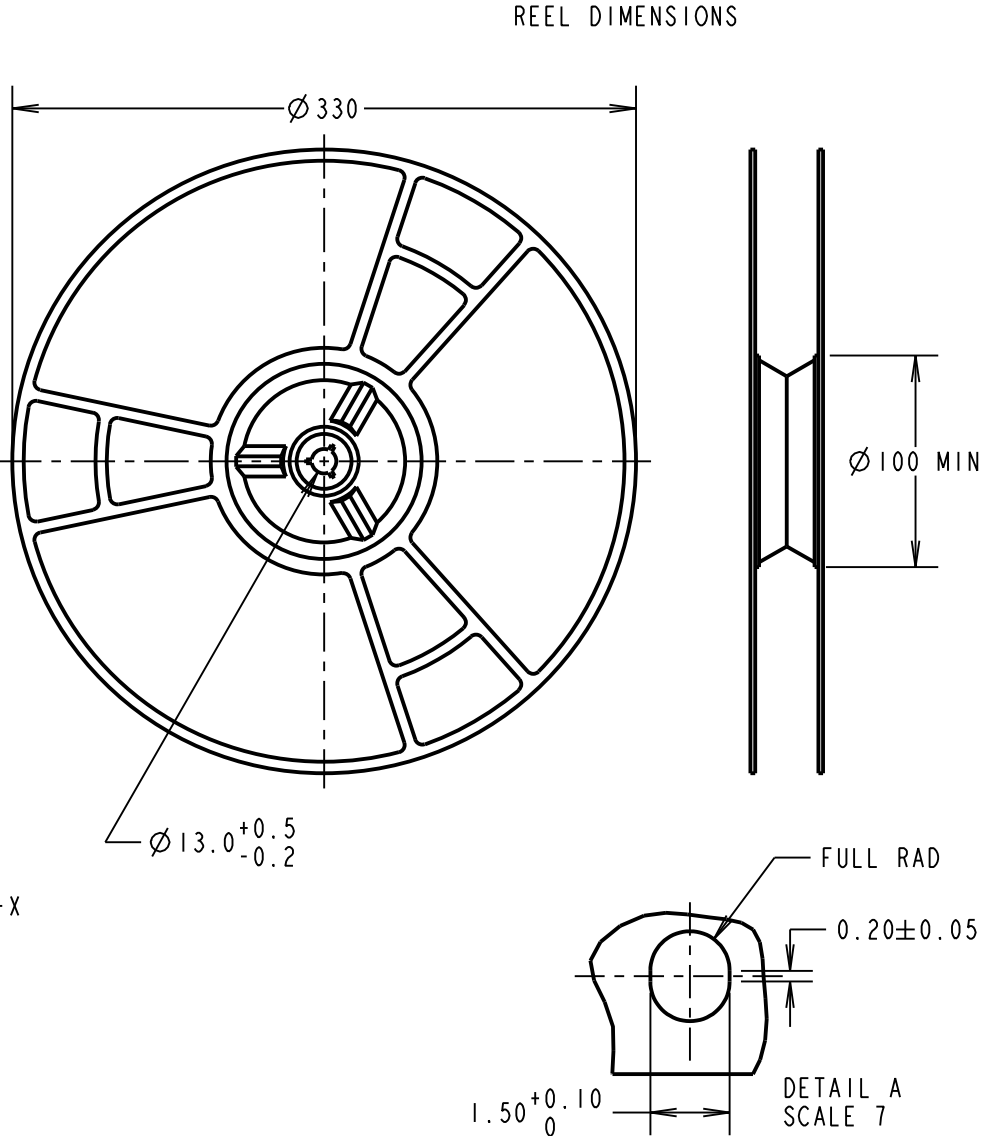
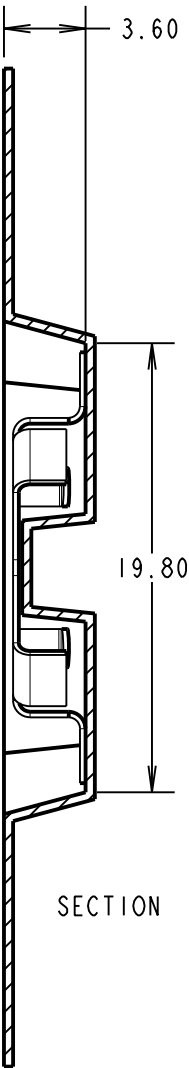
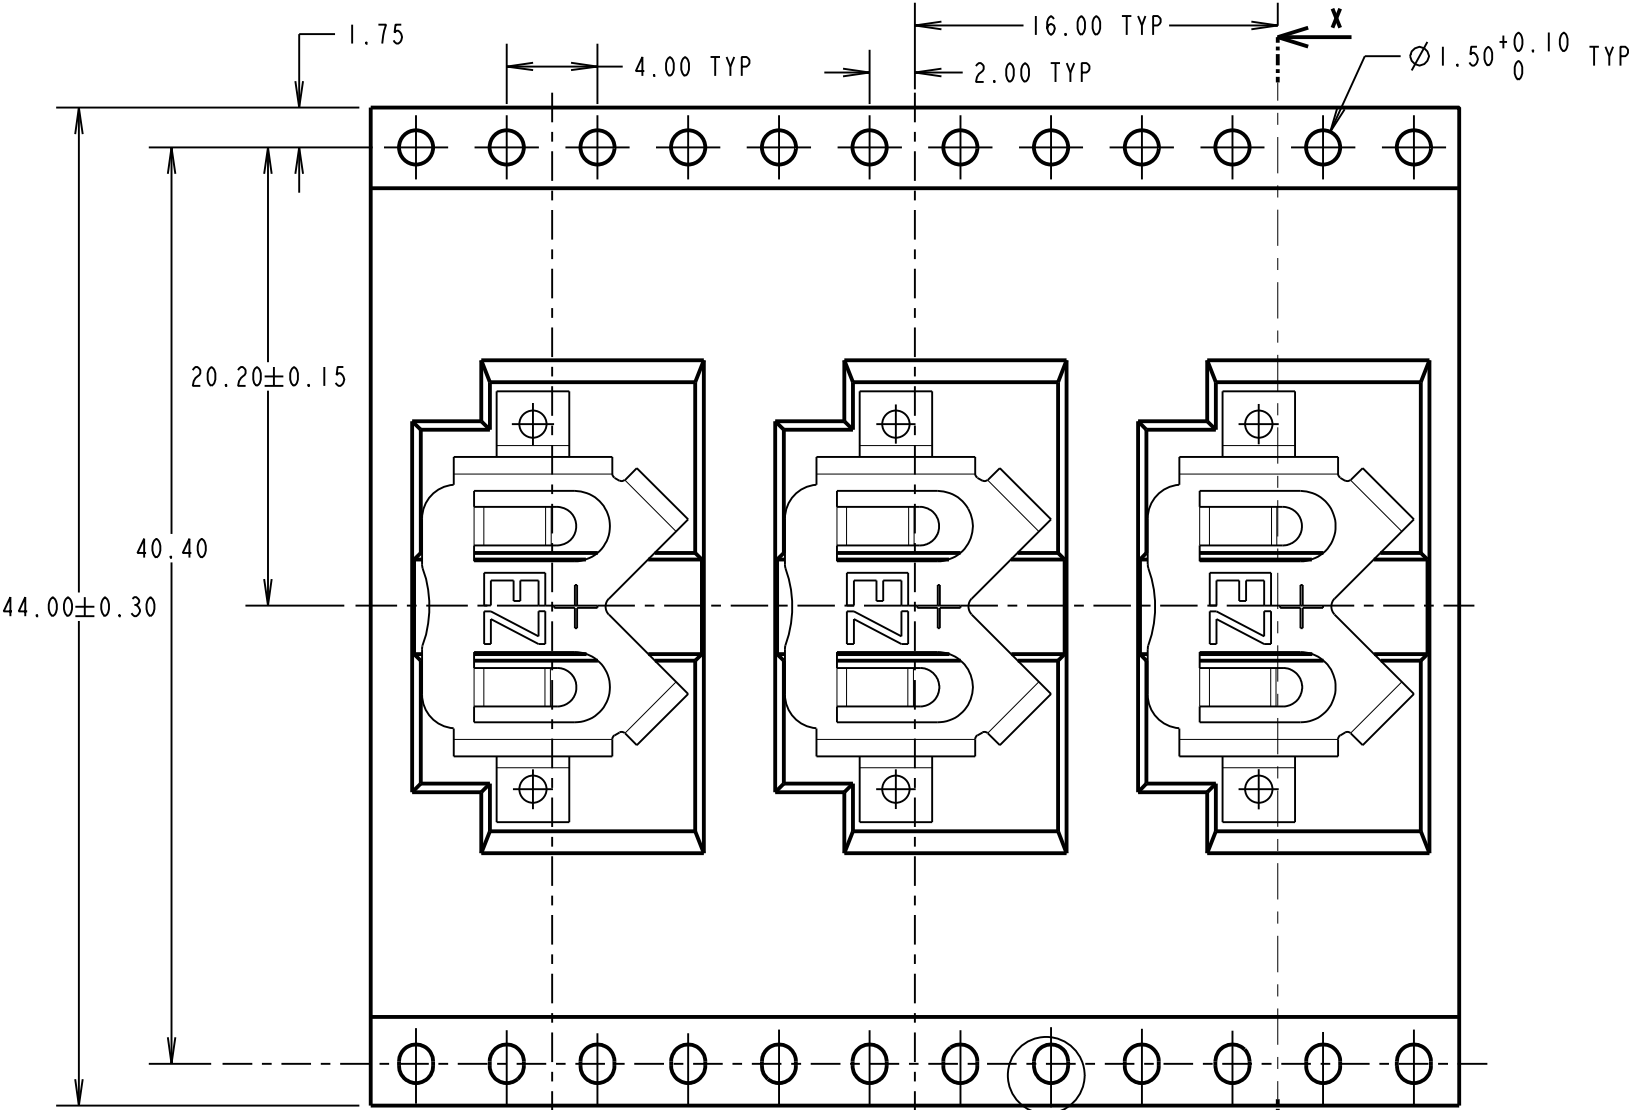


# Customer Information Sheet


DRAWING No.: S8201-46R SHEET 2 OF 2 IF IN DOUBT - ASK (C) NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

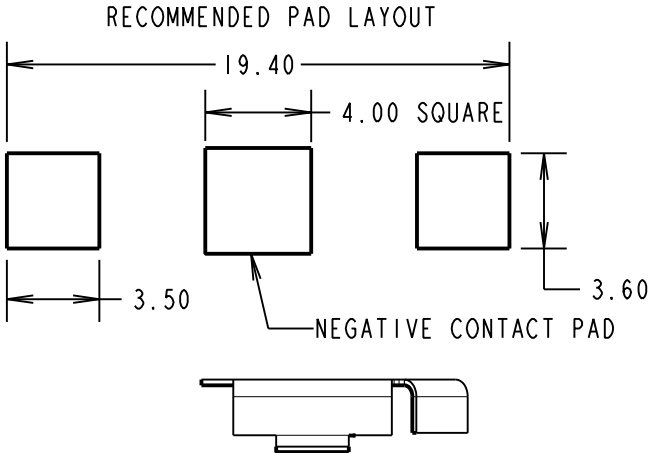

SPECIFICATION:  
MATERIAL = PHOSPHOR BRONZE  
FINISH:  
46 = 3 $\mu$  100% TIN, OVER NICKEL

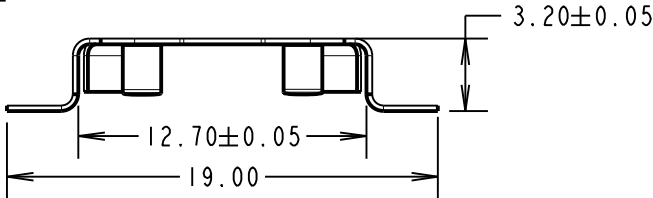

FINISHED REELING DIRECTION

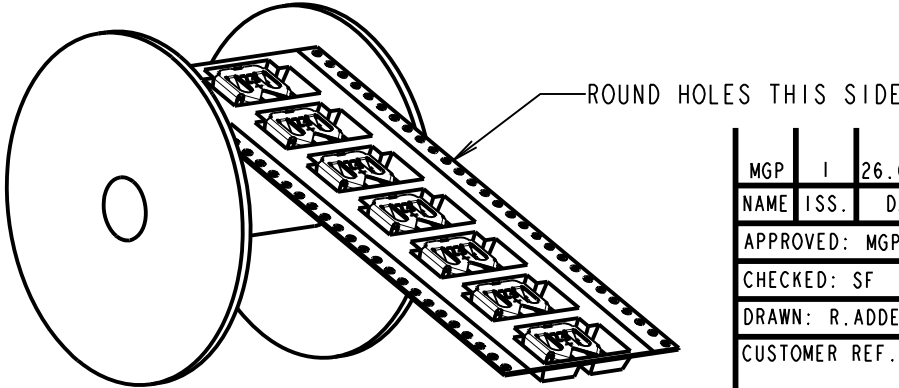

|                |      |          |        |
|----------------|------|----------|--------|
| MGP            | 1    | 26.04.12 | 11715  |
| NAME           | ISS. | DATE     | C/NOTE |
| APPROVED: MGP  |      |          |        |
| CHECKED: SF    |      |          |        |
| DRAWN: R.ADDE  |      |          |        |
| CUSTOMER REF.: |      |          |        |
| ASSEMBLY DRG:  |      |          |        |

- NOTES:
1. QUANTITY PER REEL = 1000
  2. THIS PRODUCT IS TAPED AND REELED IN ACCORDANCE WITH EIA-481-2-A (ELECTRONIC INDUSTRIES ASSOCIATION).
  3. THIS PRODUCT IS SUITABLE FOR THE FOLLOWING BATTERIES: BRI220, BRI225, CRI220 AND CRI225.

**HARWIN**  
www.harwin.com  
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES  
X. =  $\pm 1$ mm  
X.X =  $\pm 0.25$ mm  
X.XX =  $\pm 0.10$ mm  
X.XXX =  $\pm 0.01$ mm  
ANGLES =  $\pm 5^\circ$   
UNLESS STATED

MATERIAL:  
SEE ABOVE  
FINISH: SEE ABOVE  
S/AREA: mm<sup>2</sup>

TITLE:  
COIN CELL RETAINER (12mm)  
(TAPE & REELED)  
DRAWING NUMBER:  
S8201-46R  
SHT 2 OF 2