

JBX Push Pull Sealed IP68 (Mated)

SOURIAU



Environmentally Sealed JBX

The Solution for both Outdoor and Indoor waterproof applications

Secure for Outdoor applications



Waterproof, IP68 (Mated)

Reliable



Reliable & Easy Push Pull Locking Mechanism

High Density



Optimal design for utilization in high density applications

Flexible



Field Installable or Custom cable solutions

Confirmed Mating



Audible, Tactile, Visual

Space Savings



Small footprint, allows access in tight applications

Rugged



Metal shielding housing, high vibration and shock environments

Shielding



360° EMI Shielding

JBX Push Pull

Sealed IP68 (Mated)



JBX Push Pull



Description

- A rugged sealed IP68 connector for high vibration & shock environments for both indoor & outdoor applications
- Attractive & compact design enhances the overall appearance of the equipment and cable assemblies
- Sizes available today – size 0 (Consult factory for additional sizes)
- Contact layouts available today 2 to 8

Applications

- SOURIAU Push Pull Sealed connectors can be used in a variety of markets including Instrumentation, Medical, Broadcast Entertainment and Telecommunications.

Technical features

Materials

- Shell: Brass
- Shell Plating: Chrome over Nickel
- Insulator: PEEK with 15% Glass filled
- Contacts: Brass
- Contacts Plating: Gold over Nickel
- Sealing Gland: Silicon Rubber

Mechanical

- Endurance: 1000 mating/unmating
 - Vibration: 10 - 2000 HZ (per MIL STD 1344A)
 - Shock: 50g duration 6ms (per MIL STD 1344A)
 - Autoclaveable
- Please note: strain relief boot not to be used for autoclave applications

Electrical

- Current Rating: see chart
- Contact Resistance: see chart
- Insulation Resistance: 500 MΩ
- Dielectric Withstanding Voltage: see chart
- Operating Voltage: see chart

Environmental








- Operating Temperature: -55°C to + 125°C
- Salt Spray Resistance: 96 hours
- Sealing: IP68 (Mated) (please note: receptacle provides bulkhead sealing mated & unmated)
- RoHS Compliant

JBX Push Pull

Sealed IP68 (Mated)



Contact Layouts

Shell size 0							
	02	03	04	05	06	07	08
Male insulator wire side							
Solder	S	S	S**	S**	S**	S**	S**
Crimp	C	C	C	C			
PCB straight tails*	P*	P*	P*	P*	P*	P*	P*
PCB right angles*	Q*	Q*	Q*	Q*			
Contact diameter mm	0.9	0.9	0.7	0.7	0.5	0.5	0.5
Solder Max. AWG	24	24	26	26	28	28	28
Crimp wire Max. AWG	20	20	22	22			
Max current rating	10	8	7	6.5	2.5	2.5	2
Dielectric Withstanding Voltage	1400	1300	1350	800	680	680	680
Operating Voltage (Vdc/Vrms)	600/460	600/420	600/4205	400/220	320/220	320/220	320/220

** Inserts with fixed non removable contacts

* For receptacles with female contacts

Note : Contact numbering mating faces receptacle view: counterclockwise from key at position 1

Contact numbering mating faces plug view: clockwise from key at position 1

JBX Push Pull

Sealed IP68 (Mated)











Product Overview

Keying

Keying angles



JBX Series are mechanically keyed to ensure correct alignment of the inserts before the contacts mate.

«G» : normal inserts ; 0° keying angle, plugs with pin contacts, receptacles with socket contacts

	Single key way		Dual key way	
Key	G	J	A	B
Keying angle	0°	45°	30°	60°
Plug				
Receptacle				

Options

Strain Relief Boot

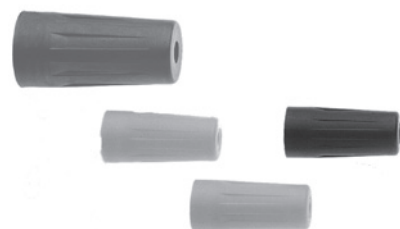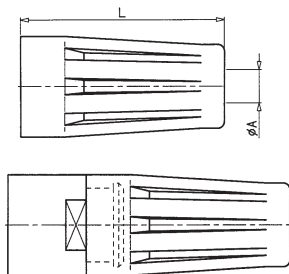

Each strain relief boot can accept diverse cable diameters.
Strain relief boot also available in various colors for color coding.

Please note: strain relief boot not to be used for autoclaveable applications.

Part number	Shell size	Dimensions			
		Ø A	L	Ø Cable	
				Min	Max
JBX 0 MP*	0	2.2	20	1.5	5.5

* Color code - see chart below

Color Code	Colors
A	blue
B	white
G	grey
J	yellow
M	brown
N	black
R	red
V	green
O	orange

Material :
ELASTOLLAN (PUR)

Working temperature :
- 40°C ; + 80°C
- 40°F ; + 176°F

Strain relief boots are ordered separately. When ordering a strain relief boot please add an M in the suffix of the part number.

Please note: strain relief boot not to be used for autoclaveable applications.

JBX Push Pull

Sealed IP68 (Mated)




Wiring & assembly instructions

Removable contacts


Removable contacts

Reliable design




- Conical entry with chamfered edge on the socket contact and smooth slope on the pin contact ensure perfect concentric mating even when handled carelessly.
- The pressure spring of the socket contact maintains a constant force on the pin contact when mated.

Crimp contacts



Contact		Usable cables			Max. current rating (A)	Contact resistance (mΩ)	Endurance (number of cycles)
Ø C	Ø F	Core section (mm²)		AWG			
0.7	0.85	Min	Max.	22-24-26	7	5	500 Max.
0.9	1.1	0.129	0.326	20-22-24	10	3.5	1000

Solder contacts




Contact		Usable cables			Max. current rating (A)	Contact resistance (mΩ)	Endurance (number of cycles)
Ø C	Ø F	Core section (mm²)		AWG			
0.7	0.7	Min	Max.	26	7	5	500 Max.
0.9	0.8	-	0.30	24	10	3.5	1000

The conductor bucket on the solder contacts is designed with an angle to form a cup into which the solder can flow easily.


Fixed contacts

Solder contacts



Contact		Shell size	Usable cables		Max. current rating (A)	Contact resistance (mΩ)	Endurance (number of cycles)
Ø C	Ø F		Core section (mm²)	AWG			
0.5	0.5	0	0.096	28	5	10	1000
0.7	0.63	0	0.15	26	7	5	1000

Contacts for PCB



Contacts for PCB		Contact length dimensions "L"
PCB tail length size 0		dimension "L" 5.5 mm
0.7 mm female PCB tail length size 0		dimension "L" 3.5 mm
0.9 mm female PCB tail length size 0		dimension "L" 3.5 mm

JBX Push Pull

Sealed IP68 (Mated)



Ordering Information

BASIC SERIES		JBX	FH	0	G	07	M	S	S	D	P	M
Shell type - Receptacle	HD - Protruding Front Mount IP68											
Shell type - Plug	FH - Straight Plug IP68											
Shell size	0											
Keying	G - J - A - B											
Contact layout	2, 3, 4, 5, 6, 7, 8 position											
Contact type	M: Male F: Female											
Contact termination	S: Solder C: Crimp (not available in positions 6, 7 & 8) P*: PCB Straight Q*: PCB Right Angle (not available in position 6,7 & 8)											
Surface plating	S: Chrome over Nickel N: Black Chrome over Nickel											
Obligatory Suffix	D: For all part numbers Standard Sealing Gland Tree (Cable OD - 1.5mm to 5.5mm)											
Insert	P: PEEK material											
Cable Backnut Option	M: Connector with backnut for strain relief boot (order boot separately on page 4)											
Mate Identification	R: Red Dot for Shells: FH and HD											

* For receptacles only

JBX Push Pull Sealed IP68 (Mated)



Markets

**Telecom
Datacom**



**Broadcast / Entertainment
Stage Light & Sound**



**Building Automation
& Controls**



Medical



Instrumentation & Measurement



Energy Power