# Spotlight Cooler 60W LED Heat Sink

#### This LED Heatsink is part of the Nuventix scalable LED portfolio.

**Future proof** – Designed with the rapidly evolving light engine industry in mind, thermal performance can be easily increased or decreased without a luminaire redesign by adding or removing a SynJet Cooler

**Flexibility** – Configure to order luminaire production process, use heatsinks for low lumen applications and the SynJet Cooler with heatsink for higher lumen versions

 ${\bf Freedom}$  – Compatible with most major light engines so thermal solutions and mechanical interfaces do not have to be redesigned when changing light engines

Fast - In stock and ready for overnight delivery, worldwide

#### **Specifications**

#### Thermal<sup>1</sup>

Thermal Wattage	Heatsink $\Theta_{s-a}^2$	Heat Sink T <sub>Rise Above Ambient</sub>
18 W	1.6 (°C/W)	29 (°C)
28 W	1.4 (°C/W)	39 (°C)
38 W	1.3 (°C/W)	48 (°C)


#### Mechanical

6063-T5 AI Extrusion	
Black Anodized	
260g	
RoHS	

Size			
Diameter: 118 mm			

Height: 42 mm

## The chart below summarizes the thermal performance of all round LED heatsink solutions with diameters from 118 to 138 mm.

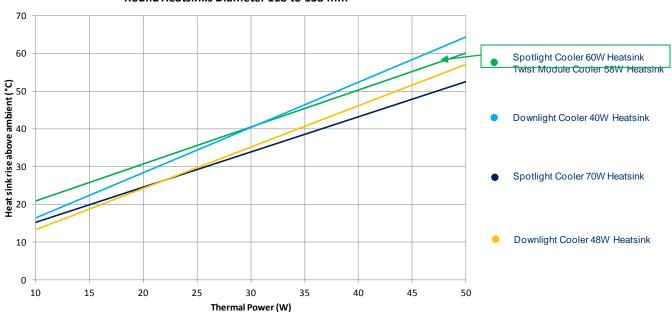

Heatsink Rise Above Ambient vs. Thermal Power Round Heatsinks Diameter 118 to 138 mm


<sup>2</sup> Thermal resistance values are given as reference only and are measured in free air without airflow obstructions. Thermal resistance is measured from the bottom middle of the heat sink to ambient air, with a heat source of 19 cm<sup>2</sup>. Actual thermal performance may vary by application and final product design should be tested to assure proper thermal performance.



4635 Boston Lane F Austin, TX 78735 w

Phone: 512-382-8100 www.nuventix.com MKTG-DOC-000164 Revision

<sup>&</sup>lt;sup>1</sup> All values are typical at 25°C unless otherwise stated.

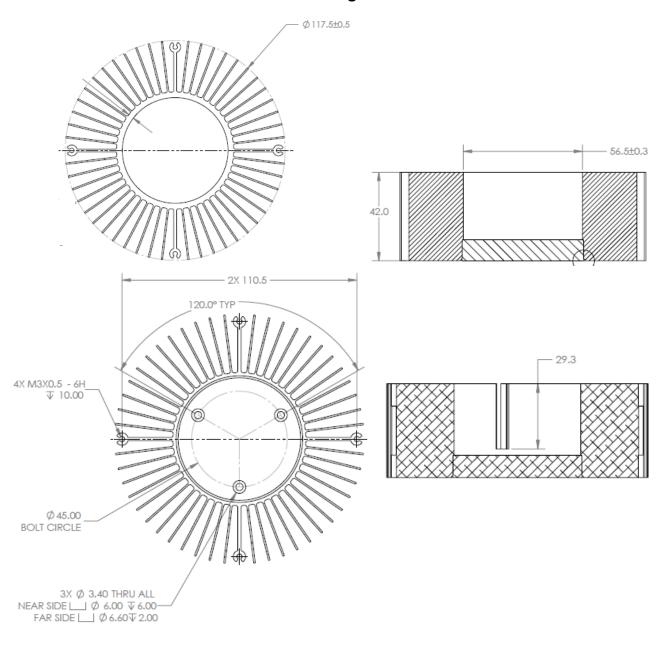

### Mechanical – LED Heatsink shown with Configurable heat sink

All dimensions are nominal and in mm unless otherwise stated. See product drawings for more detail.

#### **Part Numbers**

Part Number	Description	Notes
NX300100	LED Heatsink, 60W, Spotlight Cooler, Configurable, Black	Contact sales for other heatsink options
NX300101	LED Heatsink, 60W, Spotlight Cooler, Philips SLM, Vossloh-Schwabe, Black	Contact sales for other heatsink options
NX300102	LED Heatsink, 60W, Spotlight Cooler, Osram PrevaLed, Black	Contact sales for other heatsink options
NX300105	LED Heatsink, 60W, Spotlight Cooler, Zhaga B3, Tridonic, Black	Contact sales for other heatsink options
NX300150	LED Heatsink, 60W, Spotlight Cooler, Citizen CLL040, Ledil, Black	Contact sales for other heatsink options
NX300153	LED Heatsink, 60W, Spotlight Cooler, Xicato XSM M3, Black	Contact sales for other heatsink options
NX300158	LED Heatsink, 60W, Spotlight Cooler, BridgeLux Vero 29, RS, Black	Contact sales for other heatsink options

Nuventix reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or applications. For additional information, please contact Nuventix directly.

Phone: 512-382-8100 www.nuventix.com

MKTG-DOC-000164 Revision