



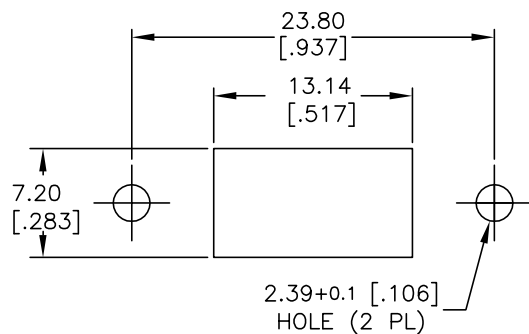

RECOMMENDED PANEL MOUNT





CIRCUIT: SPST

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
<ON>	OFF	<ON>
2-3	OPEN	2-1



< > = Momentary

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 5 AMPS W/RESISTANT LOAD @120VAC OR 28VDC
2 AMPS W/RESISTANT LOAD @250VAC
- MATERIAL: FIXED TERMINAL & MOVING CONTACT
SILVER PLATED COPPER ALLOY
- CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
- ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
- INSULATION RESISTANCE: 1,000M ohm min.
- DIELECTRIC STRENGTH: 1000V RMS @sea level
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

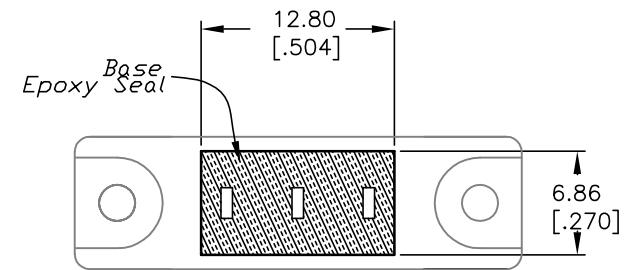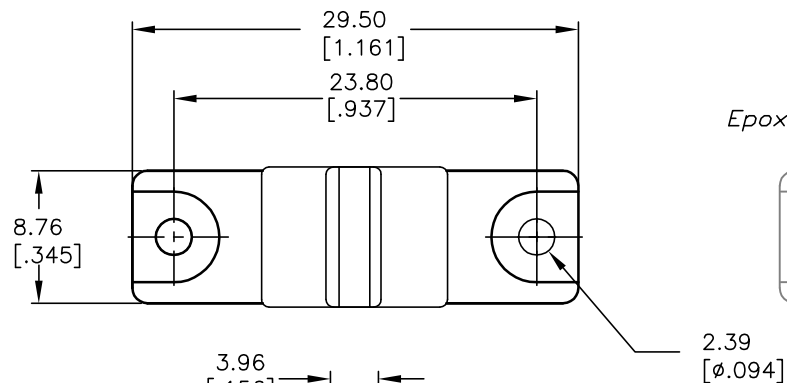

VIEW A-A

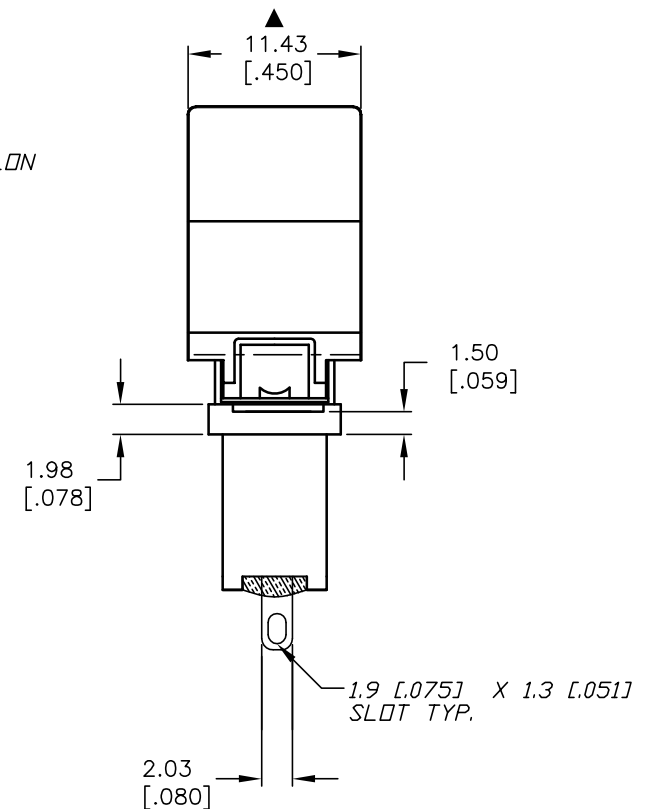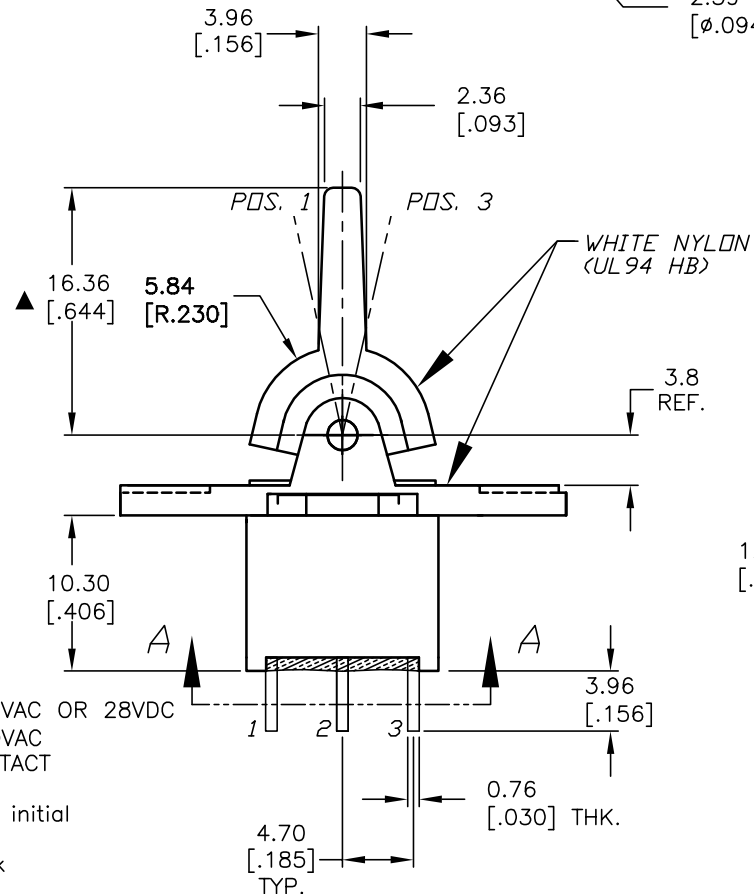**E-SWITCH®**

A	13612	RELEASED FOR PRODUCTION	11/19/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE

300AWSP4R16WHTM1QE

SCALE

2:1

DATE

11/19/03

DR

AR

DWG

T301418

REV

A