
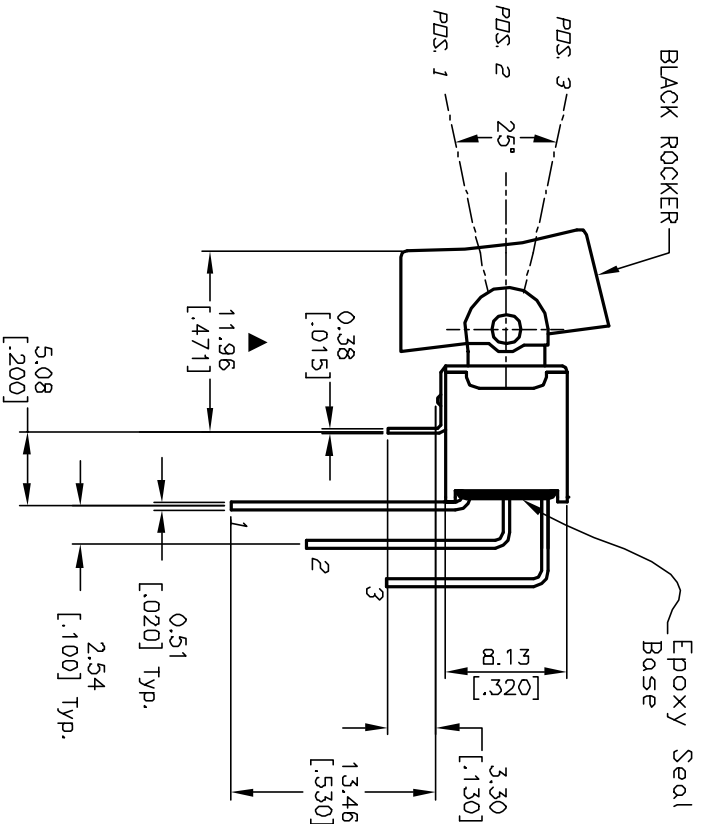
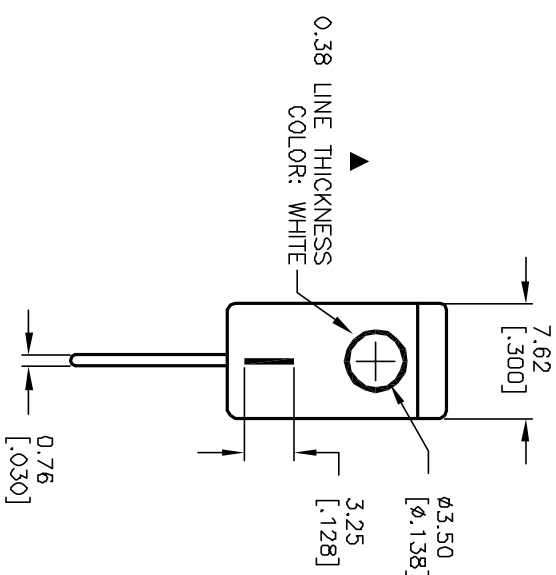


CIRCUIT: SPDT
CONTACT CONFIGURATION

RECOMMENDED PCB LAYOUT

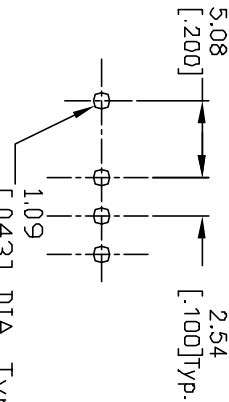

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0 ± 0.4
 0.00 ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4 VA @ 20 VAC or DC MAX
5. ELECTRICAL LIFE: 30,000 make-and-break cycles
at full load.
6. INSULATION RESISTANCE: 1000 mega-ohm typical
7. DIELECTRIC STRENGTH: 1,000 V RMS @ sea level
8. OPERATING TEMP.: -30°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.

TITLE				400AWMSF1R1M7RE, I/O GRAPHICS			
SCALE				2:1			
DATE				4/16/03			
DR				AR			
DWG				T403012			
REV				A			

A	13053	RELEASED FOR PRODUCTION	4/16/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

E-SWITCH®