
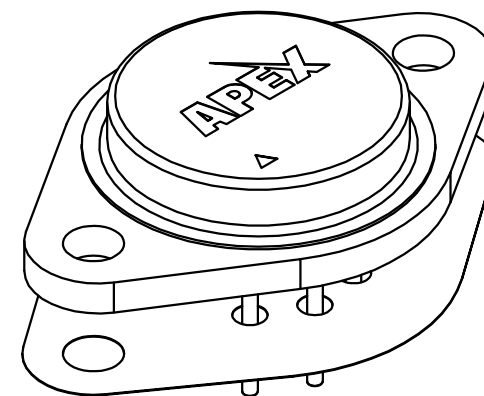



NOTES:

- Unless otherwise noted, all dimensions are in inches.
- Foil Material: .002 thick 1145 aluminum
- Interface Material: .0005 thick phase-change thermal compound, both sides.
Maximum shipping & storage temperature – 40°C
Reflow temperature – 60°C
Maximum recommended service temperature – 200°C
- Thermal impedance: .030 °C/W-in² (.194 °C/W-cm²) @ 20psi
- Thermal washers shall be packaged in quantities of 10 with oversize separators between them.
- Used with TO3 packages (Apex designator: CE).
- Power Devices part no. AL-155-10C-APX
- Supplier is to label each plastic box with the Cirrus Logic part number.

TOLERANCES – UNLESS OTHERWISE SPECIFIED
.XX = ±.01
.XXX = ±.005
ANG. = ±.5°

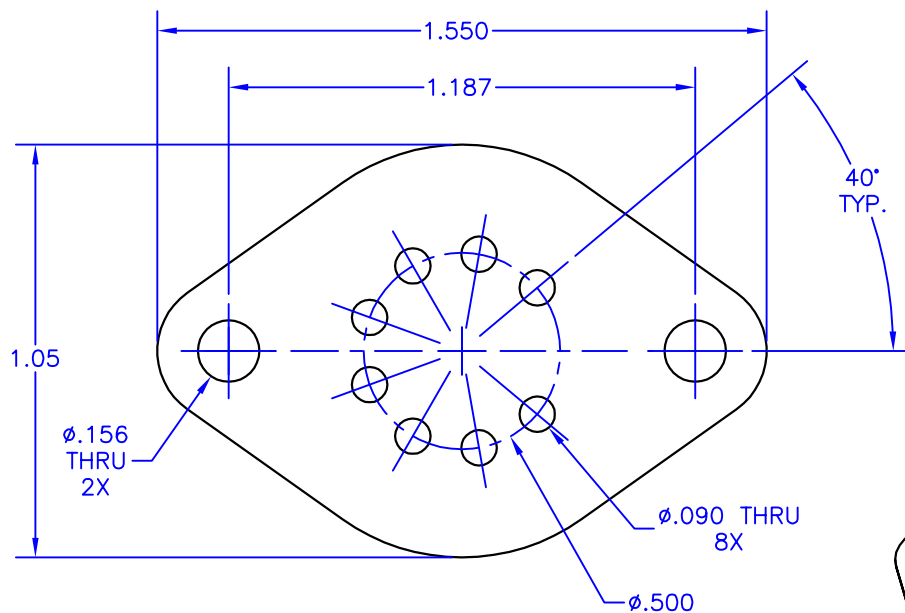

TITLE						PART NO.	
THERMAL WASHER, T03						TW03	
SUBJECT							
MECHANICAL DRAWING							
ENG.	TECH/DRAWN	DCA	SH.	OF	FILENAME	REV	DATE
D-M	P.ECK	11077	1	1	TW03	G	28FEB11