

Tastomat

Rugged Handheld Enclosure System



For Finishing Services, Product Support, or to Order

Call 1-301-696-9800

Tastomat

BOPLA developed this hand-held enclosure specifically for use under tough operating conditions. The IP 65 level of ingress protection and the material – glassbeadreinforced polyamide – provide optimal protection for your electronic components under even the most demanding circumstances. The wraparound 5 mm high collar provides a high degree of protection for fitted operating elements against unintentional operation or destruction. Drill holes in the base can be used for suspension systems or for direct screwing to a panel. Tastomat is the ideal enclosure for use in the field of crane control or machine applications.

Welcome to BOPLA City!

Enclosure material: Polyamide,				
	30% glassbead-			
	reinforced.			
	For technical data			
	see pages 646-651.			
Colour:	Light grey, similar			
	to RAL 7035;			
	special colours and			
	minimum order			
	quantities on			
	request.			
Ingress protection	: IP 65/DIN EN 60529			

Note:

In case of prolonged heat (e.g. at 75°C for 3 hours) an aftershrinkage of up to 0.8% is possible. In a similar degree, absorption of humidity may affect dimensions.

Low version

Order designation		External dim.		
Model	Order no.	L	W	Н
TAS 100	08100000	251	91	46

Membrane area: L 244 x W 84 x D 5 mm

Scope of delivery:

Lid with seal

Base:

6 fixing screws M 4 x 28 - screwed from below -

4 self-tapping screws SHR Z B 4.5 x 7.8 - for mounting plate -

High version


Order designation		External dim.		
Model	Order no.	L	W	Н
TAS 200	08200000	251	91	80


Membrane area: L 244 x W 84 x D 5 mm

Scope of delivery: Lid with seal

Base: 6 fixing screws M 4 x 62 - screwed from below -

4 self-tapping screws SHR Z B 4.5 x 7.8 - for mounting plate -

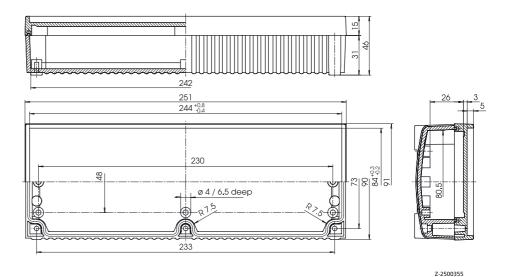

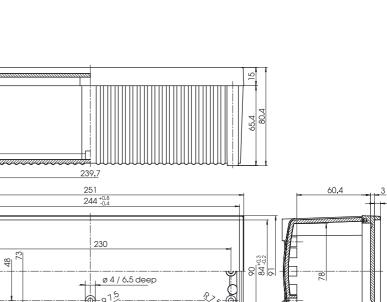

233