


USB Cable

NEED CUSTOMS?
See Page 25

- USB 2.0 and 3.0 Available
- Ideal for High Performance Data Transmission Applications
- Ultra Flexible Cable for Confined Area and Continuous Motion

Comprised of 2 individually shielded power wires and 1 twisted shielded pair of 100 ohm twinaxial configuration, Cicoil's Flexx-Sil™ jacketed USB cables are designed for highly demanding applications. Unlike typical USB cables, the Cicoil cable has been designed for high flexibility, mechanical stress, temperature extremes and harsh environments. And the flat cable construction guarantees clear, high speed data transmission, even in the toughest of environments.

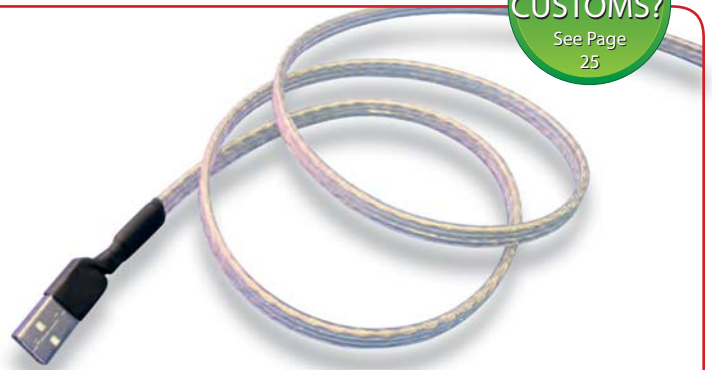

 **UL** MEETS 94V-0
  **RoHS** COMPLIANT
  **REACH** COMPLIANT
  **FAA** FLAME TESTED

Applications
Indoor and outdoor USB applications

Cable


Type	Amp Rating ¹		Conductor Gauge		Dimensions [inches]		Part Number
	Power	Signal	Power	Signal	Width	Height	
USB 2.0	7	3	24 AWG/2c	30 AWG/1 pr	0.31	0.15	USB-2000
USB 3.0	10	5	20 AWG/2c	28 AWG/1 pr	0.37	0.13	USB-3000

Note

1. Amp rating is the maximum value for each conductor at room temperature of 70°F (21°C). Amp rating decreases as temperature increases.

Dimensions

USB 2.0



Cable Assemblies




Please contact Cicoil for other connectors and length options.

Cable Length (feet)	Part Number Addition	
	H-H	H-P
3	-CAH003	-CAP003
6	-CAH006	-CAP006
12	-CAH012	-CAP012

Notes

1. Append onto base cable Part Number for complete assembly. Example: USB-2000-CAH003
2. Connector ratings may differ from cable ratings; refer to manufacturer specifications.

USB 3.0



Assembly Dimensions

Host to Host – H-H



Host to Peripheral – H-P



Connectors

- Signal (J1): USB Type A, P/N A-USBPA-3-R
- Signal (J2): USB Type B, P/N B-USBPB-3-R

Cable Specifications

All engineering values are nominal and subject to change.

Mechanical	Environmental
Conductors: Ultra flexible, finely stranded, tinned copper	Temperature Rating: -65°C to +165°C
Shielding: Ultra flexible, braided shields, with 90% nominal coverage	Moisture Rating: Submersible, Salt Water Resistant
Minimum Bend Radius:	Clean Room Rating: Class 1, Zero Particulates
- 6x cable height for intermediate flex	Extreme Environments: Sunlight, UV Light, Alcohol, Chemical and Oil Resistant
- 10x cable height for continuous flex	Electrical
Flex Life: 10,000,000 cycles nominal	Outer Jacket Dielectric Strength: 450 volts/mil (17.7 kv/mm)
Outer Jacket Durometer Rating: 65 (Shore A)	See Electrical Rating Chart on Page 47

Options

Page

Additional Conductors	26
Low Friction Options	28
StripMount™ Integrated Mounting Strip	28
Integrated Tubing	29
SuperTuff™ Jacket	29
Colored Jacketing	29
Strip and Tin Cable Ends	29
FlexRail™ Self-Supporting Cable	30
Complete Assembly	31