



ENFIS UNO Plus Array Blue 465nm

Smart, powerful, compact, efficient, reliable light

Features & Benefits

- Intense, high-power Blue spot source
- Tuned for pumping phosphors
- Ultra-high power density
- Long-life and reliable, high-performance due to excellent thermal conductivity
- Simple integration via connectorized PCB with mounting holes

Outline Specification

- 6900mW Typical Radiant Flux
- 420 Lumens Typical Luminous Flux
- 1.15cm² Aperture
- 6000mW/cm² Power density
- Input Power: 50W
- Typical thermal resistance <0.8°C/W

Light Engine Integration

Enfis can eliminate the time, cost and risk of integration by offering our arrays as part of a complete light engine solution

Smart Array Technology

Light output from the Enfis arrays can be monitored and controlled via patent-pending integrated photo-detection system, enabling precise control of light output.

Thermal Management

Enfis arrays are designed to provide excellent thermal conductivity and to be integrated effectively with thermal hardware to ensure optimum performance and life

Optics



Enfis Uno arrays provide excellent spot source with Lambertian emission characteristics. Enfis technical experts can advise a range of optical solutions to match your requirements.

Power Management

Enfis provides a range of feature-rich, powerful drivers and power supplies for our arrays. Our applications team can provide you with a solution for your specific requirements.

Applications & Markets

- Architectural lighting
- Entertainment lighting
- Neo-natal
- Dental applications
- Forensic investigation
- Backlighting
- Effect lighting

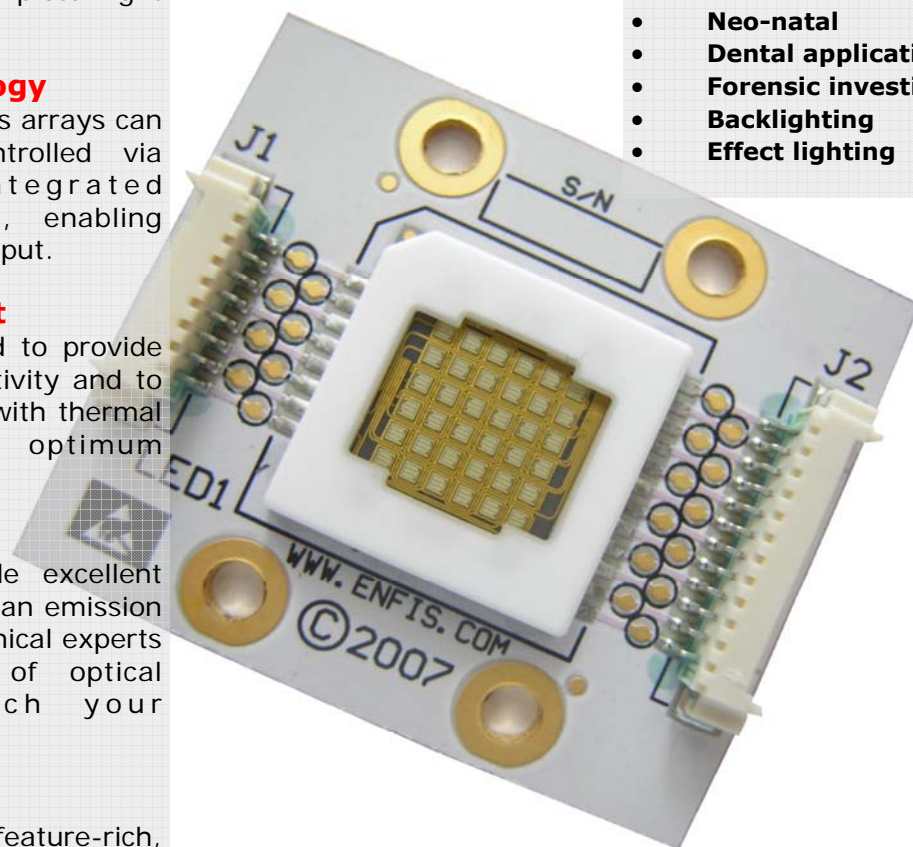


ENFIS UNO Plus Array Blue 465nm

Technical Specification


Electro-Optical Characteristics

Item	Min	Typ	Max
Rated Current If (mA)		1550	
Forward Voltage Vf (Volts)	28	32	36
Peak Wavelength λ_p (nm)	450	465	470
Dominant Wavelength λ_d (nm)	455	470	475
Spectral Width $\Delta\lambda$ (nm)	15	23	30
Total Radiant Flux Φ_R (mW)	5500	6900	
Radiant Flux Density Φ_R/A (mW/cm ²)	4783	6000	
Total Luminous Flux Φ_L (Lumens)	300	420	
Luminous Flux Density Φ_L/A (lm/cm ²)	261	365	
Total Electrical Power P (W)		50	

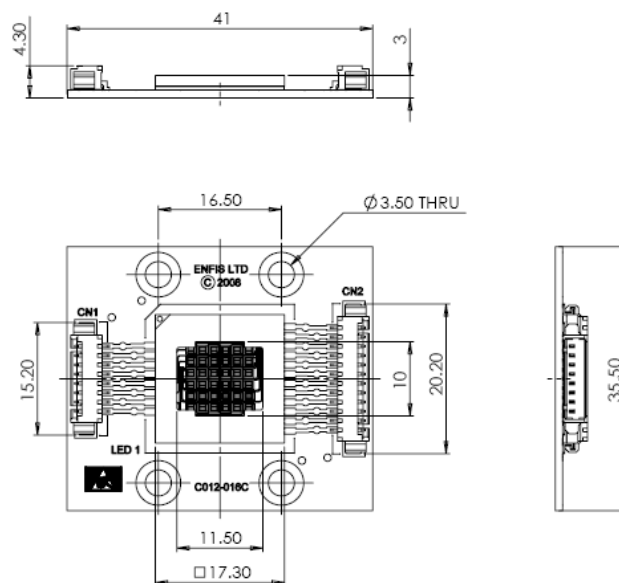


All measurements performed at a heatsink temperature of 25°C


Spectral Data

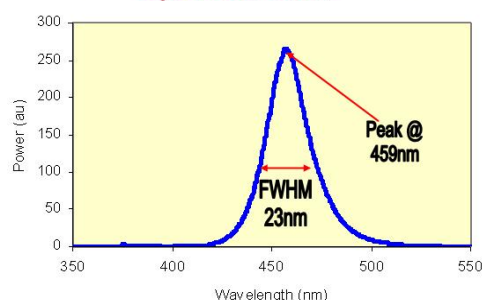

Angular Distribution

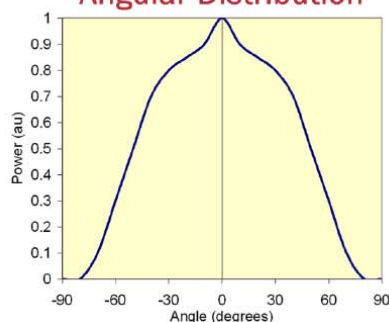

LIV Graph

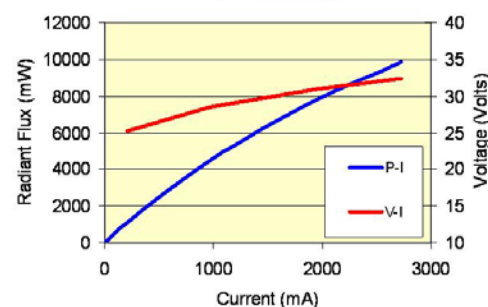

Heat Generation

Proper thermal design of the end product is of paramount importance. The operational junction temperature of each LED chip should be kept below 125°C.

Please contact Enfis for further support in this matter.

Handling LED Array

Contact with the encapsulation on the surface of the LED array must be avoided to prevent damage.

Do not apply pressure to the encapsulation or allow it to come into contact with sharp objects.

During operation the encapsulation will be hot and contact should be avoided

Static Electricity

Care must be taken when handling, these products are sensitive to static electricity.

Observe static handling precautions.



Cleaning

Avoid touching the LED array surface.

To clean—BLOW surface with either dry air or nitrogen gas

Eye Safety Precautions

The light output of the products may cause injuries to human eyes in circumstances where the products are viewed directly with unshielded eyes for more than a few seconds.

Please refer to IEC 60825-1:2001 for further information



ENFIS LIMITED
Technium 2, Kings Road,
Swansea Waterfront,
Swansea, SA18PJ, UK
Tel +44 (0)1792 485660
Fax +44 (0)1792 485537
www.enfis.com
info@enfis.com

