


E-LOGD HERE
SEE EXPLODED VIEW
1.80 TRAVEL

EXPLODED VIEW



CIRCUIT 6 POSITION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC. (Carry)

5. CONTACT MATERIAL:

CONTACTS: (MOVABLE) Copper w/Gold Plate

TERMINALS: BRASS w/Gold Plate

6. INSULATION RESISTANCE;

100 Mega-QHMS min. @500VDC


7. CONTACT RESISTANCE;

50 MILLI-OHMS typical @2-4VDC @100mA

8. OPERATING TEMP.:

BACKAGE: IN DISPENSING TUBES

3. PACKAGE. IN DISPENSING TUBES
WITH ALL POLES IN THE "OFF" POSITION.

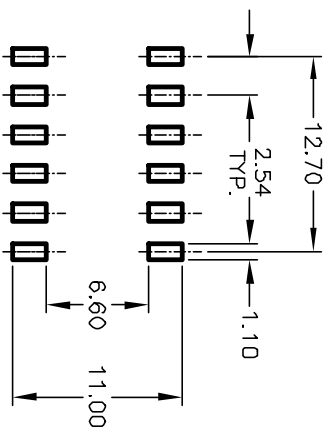

RECOMMENDED P.C.B. LAYOUT

RECOMMENDED P.C.B. LAYOUT			
A	12540	RELEASED FOR PRODUCTION	7/1/02 CJB
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			

E-SWITCH® KA J06 LG GT (GOLD) EXTENDED ACTUATOR			
TITLE	SCALE	DATE	DR
	2:1	7/1/02	CJB
		DWG	REV
		W825126	A