


E-LOGD HERE
SEE EXPLODED VIEW

-1.80 TRAVEL

 $5.00 + 0.1$

EXPLODED VIEW

1.

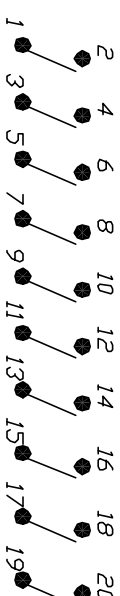PEELABLE POLYIMIDE —
TAPE SEAL

CIRCUIT 10 POSITION

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X,X=±0.4

$$X.XX=\pm 0.25$$

3. TERM, NOS. FOR REFERENCE ONLY.

4. CONTACT RATINGS: 25mA @24VDC.

5. CONTACT MATERIAL:

CONTACTS: BRASS w/Gold Plate

TERMINALS: BRASS w/GOLD Plate


6. PACKAGED: DISPENSING TUBES

WITH ALL POLES IN THE "OFF" POSITION.

7. TAPE SEAL FOR FLUX WASH.

8. ▲ DESIGNATE MAJOR:

RECOMMENDED P.C.B. LAYOUT

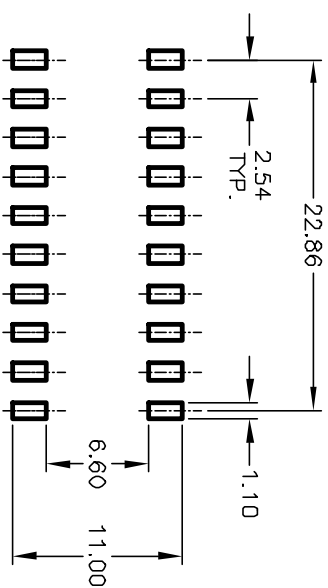

TITLE

KAJ10 TG GT
LOW PROFILE W/TAPE SEAL

					TITLE				
A	12277	RELEASED FOR PRODUCTION	7/1/02	CJB	KAJ10 TG GT LOW PROFILE W/TAPE SEAL				
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:1	7/1/02	CJB	W825330	A