

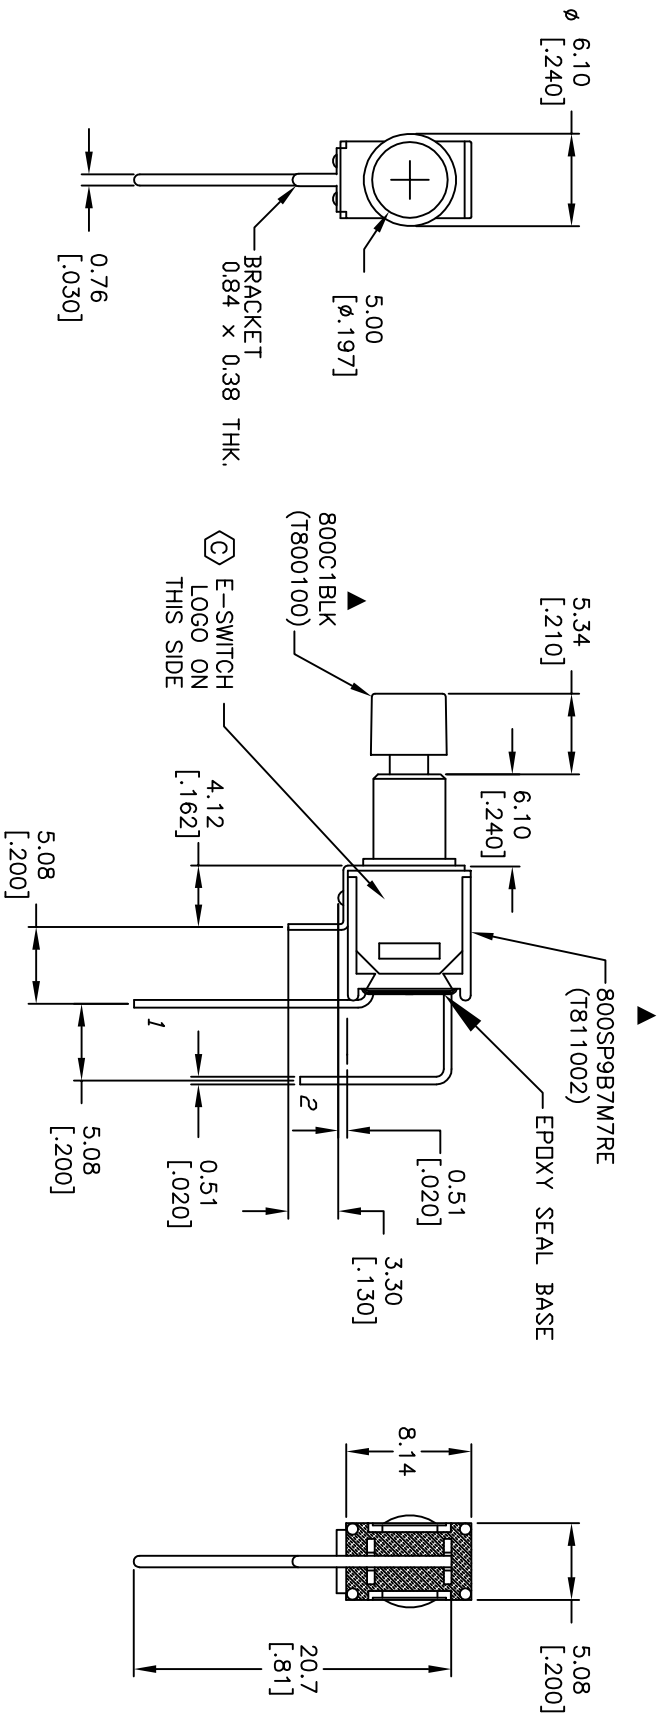


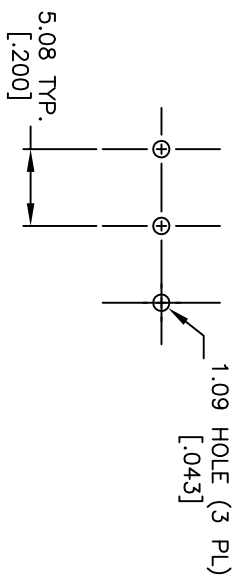

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. CONTACT RATING: 0.4 VA max. @20 VAC or DC max.
 5. FIXED TERMINAL & MOVING CONTACT:
COPPER ALLOY W/GOLD PLATE OVER
NICKLE PLATE.
 6. ELECTRICAL LIFE: 60,000 make-and-break cycle
at full load.
 7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 8. OPERATING TEMP.: -30°C to 85°C
 9. ▲ DENOTES CRITICAL PARAMETER.



()=Momentary

C	18643	SHOW E-LOGO LOCATION CORRECTLY	9/10/09	BLR	<table><tr><td colspan="2"> E-SWITCH®</td><td colspan="2"> LAMB INDUSTRIES</td></tr><tr><td colspan="4">800SP9B7M7REC1BLK</td></tr></table>					 E-SWITCH®		 LAMB INDUSTRIES		800SP9B7M7REC1BLK			
 E-SWITCH®		 LAMB INDUSTRIES															
800SP9B7M7REC1BLK																	
B	14165	CHANGE PART NUMBER	7/14/04	AR													
A	14050	RELEASED FOR PRODUCTION	6/2/04	AR													
REV.	ECN No.	DESCRIPTION	DATE	CHKD													
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV								
					2:1	9/10/09	AR	XT01264	C								