



Discontinued: Some of the color variation of actuator and flange
Last time buy: August 31, 2012



Panasonic
ideas for life

POWER ROCKER SWITCH

AJ8 (J8) SWITCHES

AJ8 switch standard actuator



AJ8 switch Wide actuator



RoHS compliant

FEATURES

1. Power rocker switches for safety requirements.

- All versions comply with ClassII EN61058-1 insulation grade. Insulation distance: 8mm Min. Contact gap: 3mm Min.
- **International Standard-approved status**

		Already approved
AJ8 switch	Standard actuator type	UL/C-UL, ENEC/VDE
	Wide actuator type	UL/C-UL, ENEC/VDE


2. High inrush current resistance is ideal for office automation equipment.

Type	Inrush	Contact rating	Expected life
AJ8	160A	16A 250V AC	Min.10 ⁴

3. Operation that only requires a light touch

The best operation characteristics were sought by analyzing touch data gathered by monitoring 1,500 people.

- Power Rocker Switch touch curve



4. A broad product line

The AJ8 switches are available with five different types of terminals: quick-connect terminals, soldering terminals, PC board terminals, right angle terminals and left angle terminals.


5. Cadmium-free contact compatibility.

6. TV-8 rating type added to lineup

PRECAUTIONS WHEN USING CADMIUM-FREE CONTACT TYPE

Models with cadmium-free contacts have been introduced in order to reduce environmentally harmful substances. ("F" is affixed to the end of the part number.) We ask customers who are currently using products with cadmium-containing contacts (no "F" at the end of the part number) to please make the switch to models with cadmium-free contacts. When switching, operating life may differ depending on the load. Please be sure to verify this by conducting an evaluation using actual equipment.

CONSTRUCTION

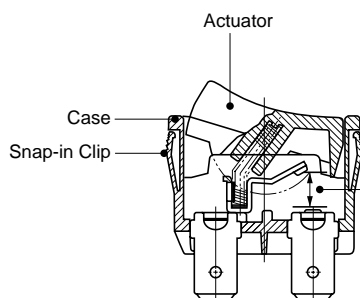

Contact gap (more than 3mm)

The EN60950 (intended for office automation equipment) conforms with a 3mm gap. When directly opening or closing the primary power supply side, a contact gap of at least 3mm is required in order to ensure safety.



Discontinued: Some of the color variation of actuator and flange
Last time buy: August 31, 2012

AJ8 (J8)

ORDERING INFORMATION

AJ	8								F
-----------	----------	--	--	--	--	--	--	--	----------

8: AJ8 switch

Nil: Standard actuator
W: Wide actuator

Number of poles and Operation
1: 1-pole, single throw (ON-OFF)
2: 2-pole, single throw (ON-OFF)

Terminal shape
0: .250 Quick-connect terminal
1: Soldering terminal
2: PC board terminal
3: PC board right angle terminal (for standard actuator only)
4: PC board left angle terminal (for standard actuator only)

Actuator indication
0: No indication
1: ☐ indication
2: ☐ indication

Actuator color
W: White B: Black R: Red (Z: Dark gray H: Light gray L: Blue G: Green Y: Yellow)

Flange color
Nil: Black (standard color)
(Custom ordered color: W: White, R: Red, Z: Dark gray, H: Light gray, L: Blue, G: Green, Y: Yellow) Remark 1)

Insulation guard
Nil: Short guard type
T: Long guard type (.250 Quick-connect terminal and soldering terminal of standard actuator only)

F: Cadmium-free product

Remarks: 1. Please consult us for details concerning different flange colors.
2. "I O" is engraved on all flanges.
3. The color of indication on the actuator:
• White actuator: black
• Others: white
4. They come with a stamp indicating international standards without your request.
5. Actuator color Z: Dark gray, H: Light gray, L: Blue, G: Green, Y: Yellow and Flange color R: Red, Z: Dark gray, L: Blue, G: Green, Y: Yellow will be discontinued from August 31, 2012.

TV rating type

AJ	8	2			B	TV	F
-----------	----------	----------	--	--	----------	-----------	----------

8: AJ8 switch

Number of poles and Operation
2: 2-pole, single throw (ON-OFF)

Terminal shape
0: .250 Quick-connect terminal
1: Soldering terminal

Actuator indication
0: No indication
2: ☐ indication

Actuator color
B: Black

Rating
TV: TV rating

F: Cadmium-free product



Discontinued: Some of the color variation of actuator and flange
Last time buy: August 31, 2012

AJ8 (J8)

PRODUCT TYPES

1. Standard actuator type

(1) Without indication on actuators

Terminal shape	Poles	Operating types	Part No.
			Without indication
.250 Quick-connect terminal	1-pole	ON-OFF	AJ8100*F
	2-pole		AJ8200*F
Soldering terminal	1-pole		AJ8110*F
	2-pole		AJ8210*F
PC board terminal	1-pole		AJ8120*F
	2-pole		AJ8220*F
PC board right angle terminal	1-pole		AJ8130*F
	2-pole		AJ8230*F
PC board left angle terminal	1-pole		AJ8140*F
	2-pole		AJ8240*F

- Remarks: 1. A letter indicating the actuator color is entered in place of asterisk. (Regarding the color, please refer to ORDERING INFORMATION.)
Standard flange color is black. For other colors type, they are custom ordered. For requests of other flange color, please refer to ORDERING INFORMATION.
2. Long guard type is available for .250 Quick-connect terminal and soldering terminal type. When ordering, please add a "T" before the "F" at the end of the part number.
3. The color of indication on the actuator:
• For white actuator: black
• For others: white
4. They come with a stamp indicating international standards without your request.
5. Note that the position of the I mark on the flange is used as a reference for left angle and right angle terminals as shown in the diagram below.



Right angle terminal



Left angle terminal

(2) With indication on actuators

Terminal shape	Poles	Operating types	Part No.	
			With I ○ indication	With — ○ indication
.250 Quick-connect terminal	1-pole	ON-OFF	AJ8101*F	AJ8102*F
	2-pole		AJ8201*F	AJ8202*F
Soldering terminal	1-pole		AJ8111*F	AJ8112*F
	2-pole		AJ8211*F	AJ8212*F
PC board terminal	1-pole		AJ8121*F	AJ8122*F
	2-pole		AJ8221*F	AJ8222*F
PC board right angle terminal	1-pole		AJ8131*F	AJ8132*F
	2-pole		AJ8231*F	AJ8232*F
PC board left angle terminal	1-pole		AJ8141*F	AJ8142*F
	2-pole		AJ8241*F	AJ8242*F

- Remarks: 1. A letter indicating the actuator color is entered in place of asterisk. (Regarding the color, please refer to ORDERING INFORMATION.)
Standard flange color is black. For other colors type, they are custom ordered. For requests of other flange color, please refer to ORDERING INFORMATION.
2. Long guard type is available for .250 Quick-connect terminal and soldering terminal type. When ordering, please add a "T" before the "F" at the end of the part number.
3. The color of indication on the actuator:
• For white actuator: black
• For others: white
4. They come with a stamp indicating international standards without your request.
5. Note that the position of the I mark on the flange is used as a reference for left angle and right angle terminals as shown in the diagram below.



Right angle terminal



Left angle terminal



Discontinued: Some of the color variation of actuator and flange
Last time buy: August 31, 2012

AJ8 (J8)

2. Wide actuator type

(1) Without indication on actuators

Terminal shape	Poles	Operating types	Part No.	
			Without indication	
.250 Quick-connect terminal	1-pole	ON-OFF	AJ8W100*F	
	2-pole		AJ8W200*F	
Soldering terminal	1-pole		AJ8W110*F	
	2-pole		AJ8W210*F	
PC board terminal	1-pole		AJ8W120*F	
	2-pole		AJ8W220*F	

(2) With indication on actuators

Terminal shape	Poles	Operating types	Part No.	
			With I O indication	With — O indication
.250 Quick-connect terminal	1-pole	ON-OFF	AJ8W101*F	AJ8W102*F
	2-pole		AJ8W201*F	AJ8W202*F
Soldering terminal	1-pole		AJ8W111*F	AJ8W112*F
	2-pole		AJ8W211*F	AJ8W212*F
PC board terminal	1-pole		AJ8W121*F	AJ8W122*F
	2-pole		AJ8W221*F	AJ8W222*F

Remarks: 1. A letter indicating the actuator color is entered in place of asterisk. (Regarding the color, please refer to ORDERING INFORMATION.)
Standard flange color is black. For other colors type, they are custom ordered. For requests of other flange color, please refer to ORDERING INFORMATION.
2. The color of indication on the actuator:
• For white actuator: black
• For others: white
3. They come with a stamp indicating international standards without your request.

3. TV rating type

Terminal shape	Poles	Operating types	Part No.	
			Without indication	With — ○ indication
.250 Quick-connect terminal	2-pole	ON-OFF	AJ8200BTVF	—
			—	AJ8202BTVF
Soldering terminal			AJ8210BTVF	—
			—	AJ8212BTVF

SPECIFICATIONS

1. Contact rating

Voltage	Resistive load ($\cos \phi \approx 1.0$)	Motor load (EN61058-1) ($\cos \phi \approx 0.6$)	Inrush load
250V AC	16A	4A	100A (8.3ms)

Remark: The motor load is in accordance with EN61058-1. Inrush current can be switched up to the value of 6 times the indicated rating.

2. TV rating

Voltage	Resistive load ($\cos \phi \approx 1.0$)	Motor load (EN6105801) ($\cos \phi \approx 0.6$)	Capacitor load (EN61058-1) (Inrush load)	Lamp load (UL1054) (TV-8)	Expected electrical life (at 7 cpm)
	($\cos \phi \approx 1.0$)	($\cos \phi \approx 0.6$)	(Inrush load)	(TV-8)	(at 7 cpm)
120V AC	—	—	—	8/117A	Min. 2.5×10^4
250V AC	16A	4A	160A (8.3ms)	—	Min. 10^4



Discontinued: Some of the color variation of actuator and flange
Last time buy: August 31, 2012

AJ8 (J8)

3. Characteristics

Expected life (Min. operations)	Mechanical	Min. 5×10^4 (at 20 cpm.)
	Electrical*	Min. 10^4 (at 7 cpm., at rated load)
Initial insulation resistance (Between terminals)		Min. 100 M Ω (at 500V DC measured by insulation resistive meter)
Initial breakdown voltage (Between terminals)		2,000 Vrms detection current: 10 mA
Initial contact resistance (By voltage drop at 1A, 2 to 4V DC)		Max. 100m Ω
Temperature rise	at 6×10^3 ope. or less	Max. 30°C (UL1054)
	from 6×10^3 ope. to 10^4	Max. 55°C (EN61058-1)
Vibration resistance		10 to 55 Hz at double amplitude of 1.5mm
Shock resistance		Min. 490m/s ² {50 G}
Actuator strength		40 N {4.08kgf} for 1 minute (operating direction)
Terminal strength (.250 Quick-connect terminal)		100 N {10.2kgf} for 1 minute or more (Pull & push direction)
Ambient temperature		-25°C to +85°C (Not freezing below 0°C)
Flame retardancy		UL94V-0
Tracking resistance		Min. 175
Operating force (reference characteristics)	1-pole	2.45 ± 1.47 N {0.25 \pm 0.15kgf}
	2-pole	4.5 ± 2.5 N {0.46 \pm 0.25kgf}
Contact material		AgSnO ₂ alloy

Remark: Test conditions are in accordance with EN61058-1, UL1054 and JIS C 6571.

* Except TV rating type

DIMENSIONS

mm General tolerance: ± 0.5

1. .250 Quick-connect terminal/Short guard type




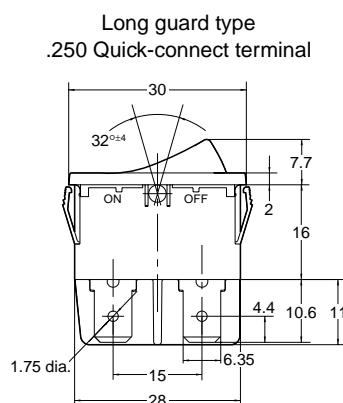


Diagram of recommended
locations for panel
mounting holes

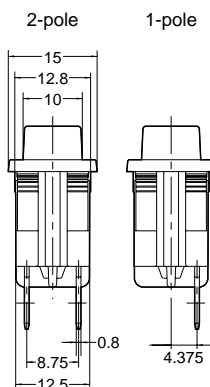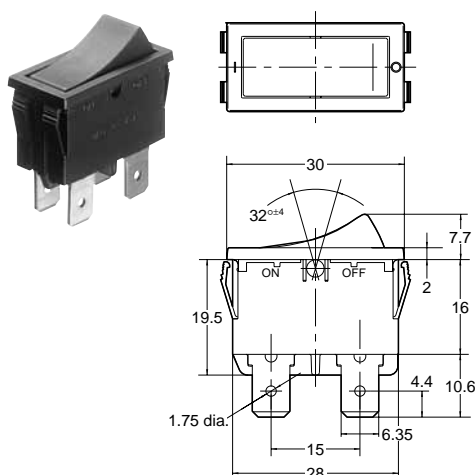

Panel thickness	X
0.75 to 1.25	$28.2^{+0}_{-0.1}$
1.25 to 2	$28.4^{+0}_{-0.1}$
2 to 3	$28.8^{+0}_{-0.1}$

2. Soldering terminal




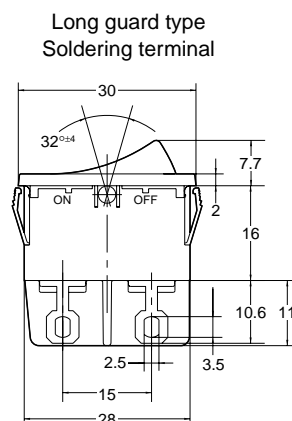


Diagram of recommended
locations for panel
mounting holes

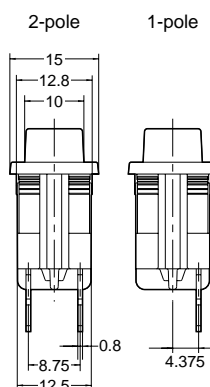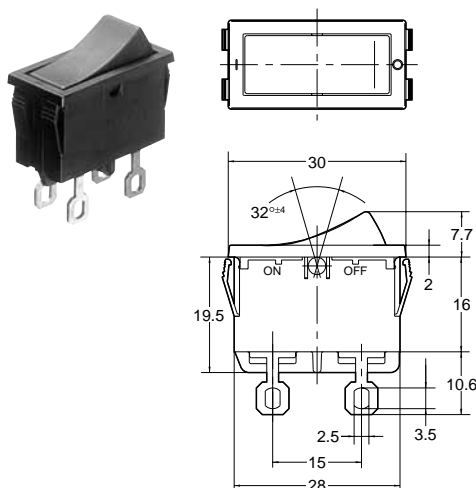

Panel thickness	X
0.75 to 1.25	$28.2^{+0}_{-0.1}$
1.25 to 2	$28.4^{+0}_{-0.1}$
2 to 3	$28.8^{+0}_{-0.1}$




Discontinued: Some of the color variation of actuator and flange
Last time buy: August 31, 2012

AJ8 (J8)

3. PC board terminal

mm General tolerance: ± 0.5

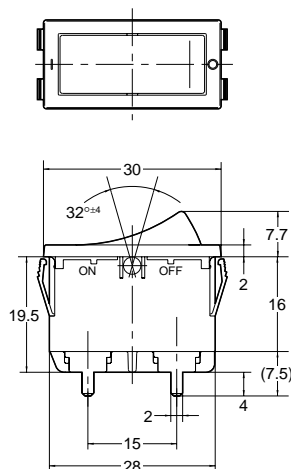

PC board pattern



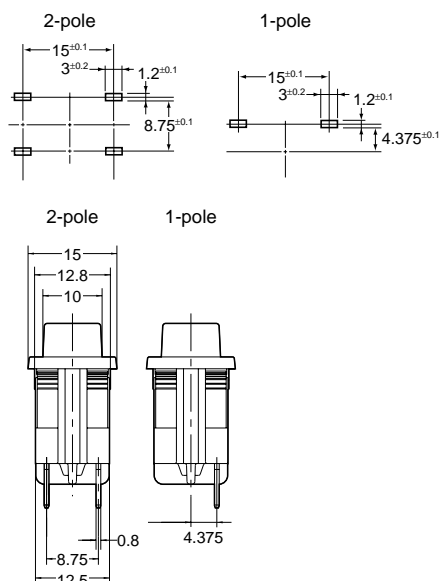


Diagram of recommended locations for panel mounting holes



Panel thickness	X
0.75 to 1.25	$28.2^{+0}_{-0.1}$
1.25 to 2	$28.4^{+0}_{-0.1}$
2 to 3	$28.8^{+0}_{-0.1}$

4. PC board right angle terminal

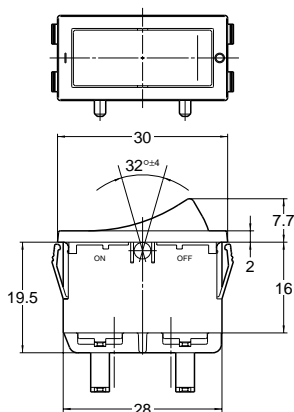

PC board pattern


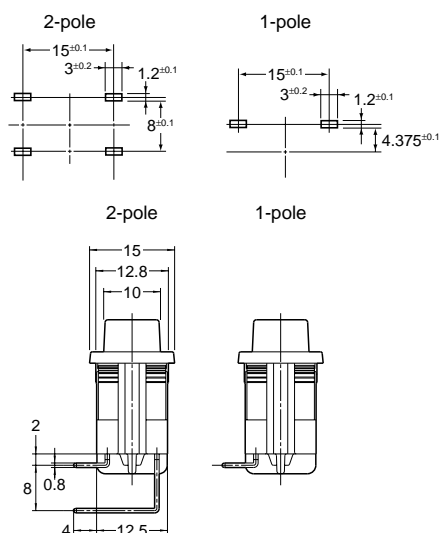


Diagram of recommended locations for panel mounting holes



Panel thickness	X
0.75 to 1.25	$28.2^{+0}_{-0.1}$
1.25 to 2	$28.4^{+0}_{-0.1}$
2 to 3	$28.8^{+0}_{-0.1}$

Remark: Left angle terminal type is also available.

5. Wide actuator type


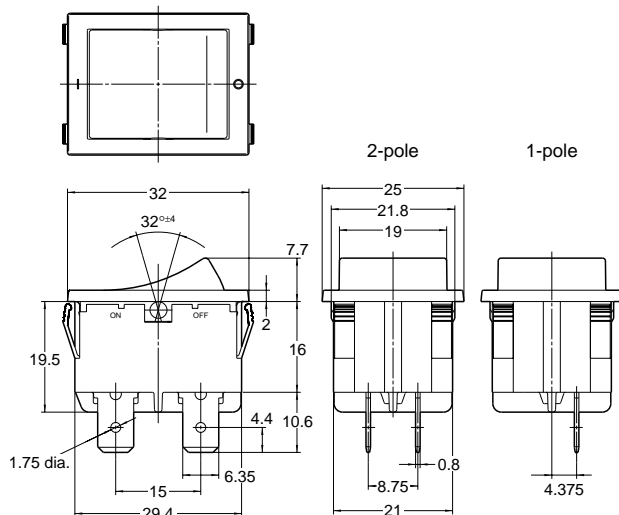


Diagram of recommended locations for panel mounting holes



Panel thickness	X
1 to less than 1.8	$30.0^{+0}_{-0.1}$
1.8 to 2.3	$30.7^{+0}_{-0.1}$

Remark: Dimensions for the terminals of soldering terminal type and PC board terminal type are the same as those of standard actuator type.



Discontinued: Some of the color variation of actuator and flange
Last time buy: August 31, 2012

AJ8 (J8)

NOTES


1. Switch mounting

Mount the switch with the hole cutting dimensions shown in the dimensions. Contact us if you are considering using a panel of other than the recommended size and shape.

2. Regarding fastening lead wires to terminals

1) When connecting the tab terminals, use a .250 Quick-connect and insert the terminals straight in. If they are skewed, the terminals will require excessive insertion force. In addition, there is some variation in the insertion force required for different receptacles from different manufacturers, so confirm how much force is needed under actual conditions. Do not solder wires onto tab terminals.
 2) With manual soldering: Complete the soldering connection work within 3 seconds with the tip of the soldering iron (60W soldering iron) at a temperature of 420°C or lower, and take care not to apply any force to the terminal area.

Avoid touching the switch with soldering iron.

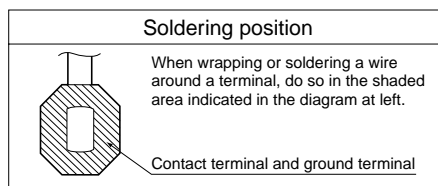

Refer to the diagram above, "soldering position," for details on the position where a wire should be soldered to a terminal. When soldering PC board terminals, keep soldering time to within 5 s at 270°C soldering bath or within 3 s at 350°C soldering bath.

3) The terminals should be connected in such a way that they are not under constant stress from the connecting wires.

4) Terminal material is copper alloy which may discolor due to finger's oil or after a long time. But that discoloration does not effect actual performance.

3. Resistance to chemicals

To clean the switch unit, use a neutral detergent diluted with water. Do not use acidic or alkaline solvents as they may damage the switch. Furthermore, be careful not to get any of the detergent solution inside of the switch while cleaning it.

4. Environment

Avoid using and storing these switches in a location where they will be exposed to corrosive gases, silicon, or high dust levels, all of which can have an adverse effect on the contacts.

5. Take care not to drop the product as it may impair performance.


REFERENCE

1. Outline of UL1054 test


Overload test AJ8: 20A 250V AC
 (Power factor 0.75 to 0.8)
 50 operation
 Endurance test AJ8: 16A 250V AC
 (Power factor 0.75 to 0.8)
 6×10³ operation
 After testing, temperature rise of terminals should be less than 30°C and no abnormality should be observed in characteristics.

2. Outline of EN61058-1 test

After switching 5 × 10³ times on the above load condition at both 85±5°C and 25±10°C, temperature rise of terminals should be less than 55°C and no abnormality should be observed in characteristics.

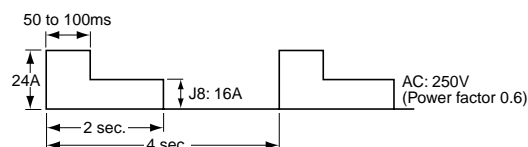

INTRODUCTION TO 4P CONNECTORS FOR THE AJ8 SWITCH (produced by Nippon Tanshi co.,Ltd)



Suitable switches: AJ8 switch, .250 Quick-connect terminal

(Note: Terminal guard long type switches are not suitable for this connector.)

Housing

Product number: N1620-4204

Receptacle

Product number: 17168-2 (post-plated product for fine wires)
 17168-M2 (material plated product for fine wires)
 172131-M2 (for thick wires)

Notes) This AJ8 switch connector is not available from Panasonic Corporation. Contact us for further details on this connector.