

IC SOCKET 2.54mm (0.100") — PITCH=15.24mm

ASSMANN
Electronic Components





Specification

Contact Resistance: 30 mohms maximum.at DC 100mA
Insulator Resistance: 1000 Megohms minimum.at DC 500V
Current Rating: 1 AMP
Dielectric Withstanding Voltage: AC 500V for 1 minute
Operating Temperature: -55°C ~ +105°C
Contact: Phosphor Bronze
Housing: PBT & 30% Glass Fiber UL94V-0

Axx-LCG-T-R

G = FULL GOLD

OF CONTACTS (24 - 40)

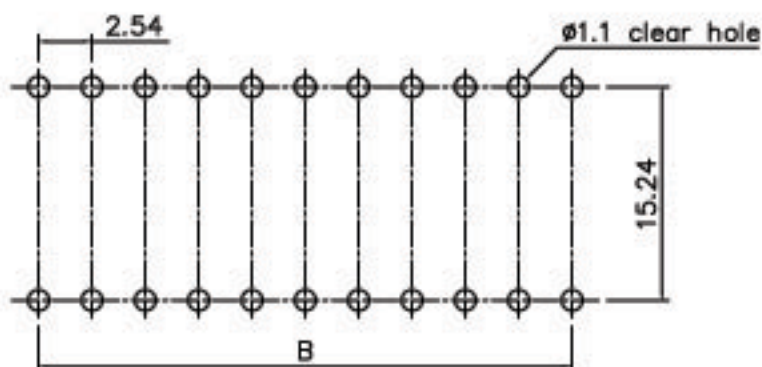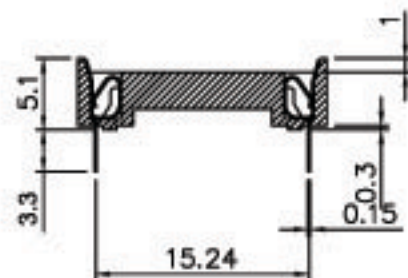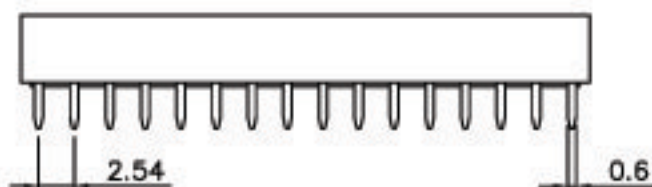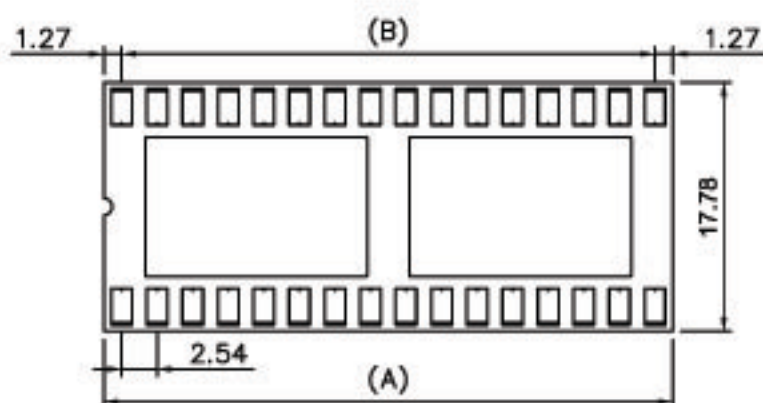

Recommended P.C.B. Layout

RoHS COMPLIANT

Dimensions

Positions	A	B
24	30.48	27.94
28	35.56	33.02
32	40.64	38.10
40	50.80	48.26

一般公差	.00	±0.05	.0	±0.1	0.	±0.3	10-29.99	±0.5
30-99.99	±1.0	100-299.99	±1.5	品名 IC SOCKET 2.54mm (0.100") — PITCH=15.24mm				
Axx-LC-TT-R (15.24mm)		比例	2/1	投影	第三角法	圖樣編號	承認	
		單位	mm	繪圖	何 靜	日期	2002/12/26	版本 A