

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY



FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BA-2RL2-A2

ABK7500

BA-2RL2-A2

PAGE 1 OF 1

M

DRAWING
NUMBER

9

X

ISSUE

RELEASE NO.

CHECK

REVISIONS

A	CO 9600	18 JAN 06
L	M H	25 MAR 59
B	CO27518	26 JUN 70
C	CO-73287-J	22 NOV 93
D	CO-75204-B	18 JAN 94
E	WJC	775 90
F	CO-92159	21 JAN 98
G	CO93346	25 AUG 98
H	0018387	18 JAN 06

FORMTEK

DRAWN

CHECK

59

L M H

25 MAR

26 MAR 59


.37 DIA X .15 WIDE SINTERED
STAINLESS STEEL
ROLLER

1.437 MAX
FREE
POSITION

1.125±.030
OPERATING
POSITION

△.140^{+.002}_{-.001}

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

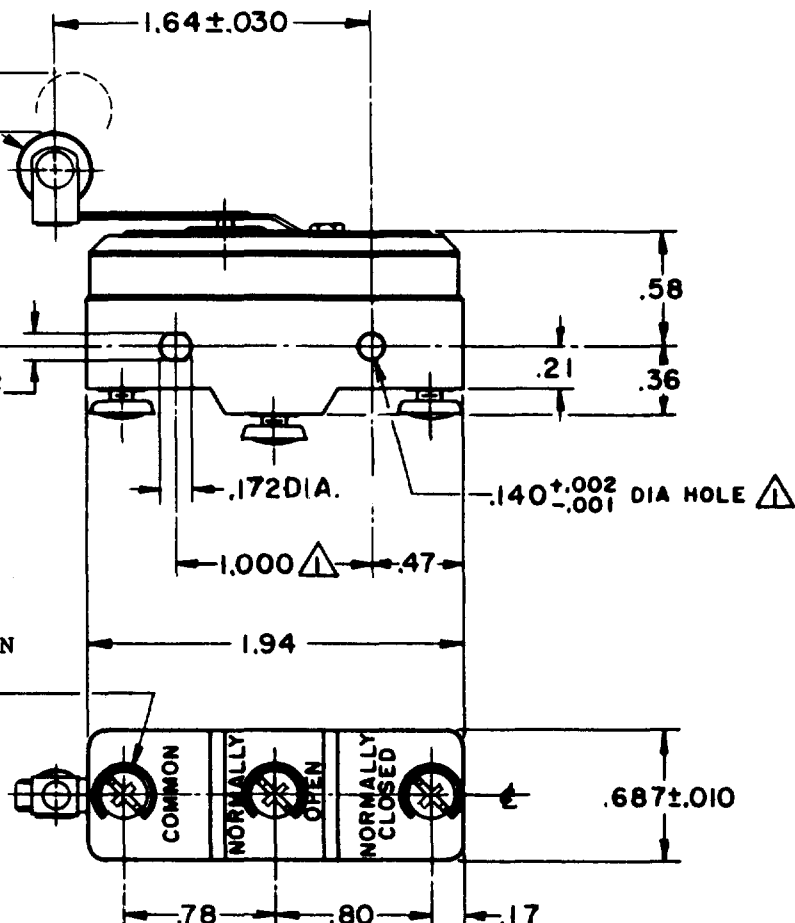

NOTE

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE-----9 OZ MAX

RELEASE FORCE-----1 OZ MIN

DIFFERENTIAL TRAVEL-----.065 MAX

DO NOT OVERTRAVEL MORE THAN-----.060

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L23 20A 125, 250 OR 480 VAC
10A 125 VAC "L"

L288 1HP 125 VAC, 2HP 250 VAC
L308 1/2A 125 VDC, 1/4A 250 VDC
L315

CE

20(3)A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT