

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH — ENCLOSED

CATALOG LISTING
BME6-2RQ171

BME6-2RQ171

M

DRAWING
NUMBER

XX

ISSUE
3

REPLACES

RELEASE NO PR-18542

CHECK

RJ

CHECK

9 AUG 90

5-RT

CHECK

90



CHECK

8 AUG 90

SLB

DRAWN

PO-92851-A

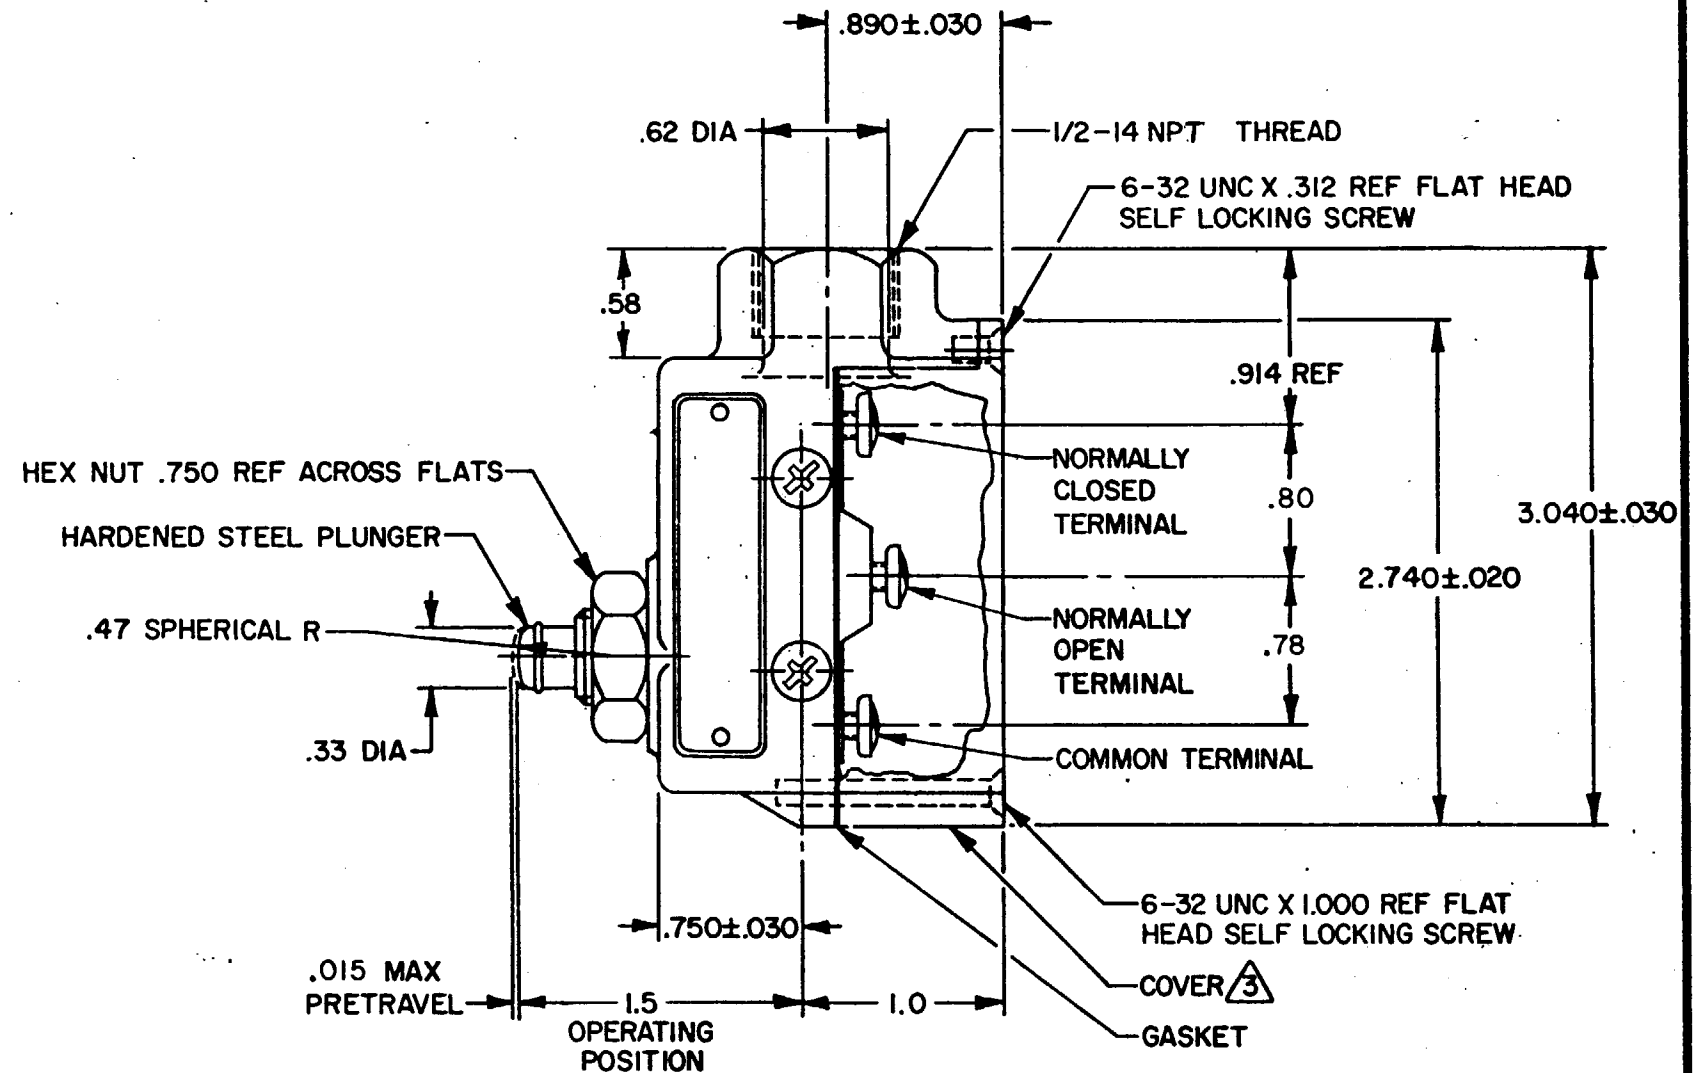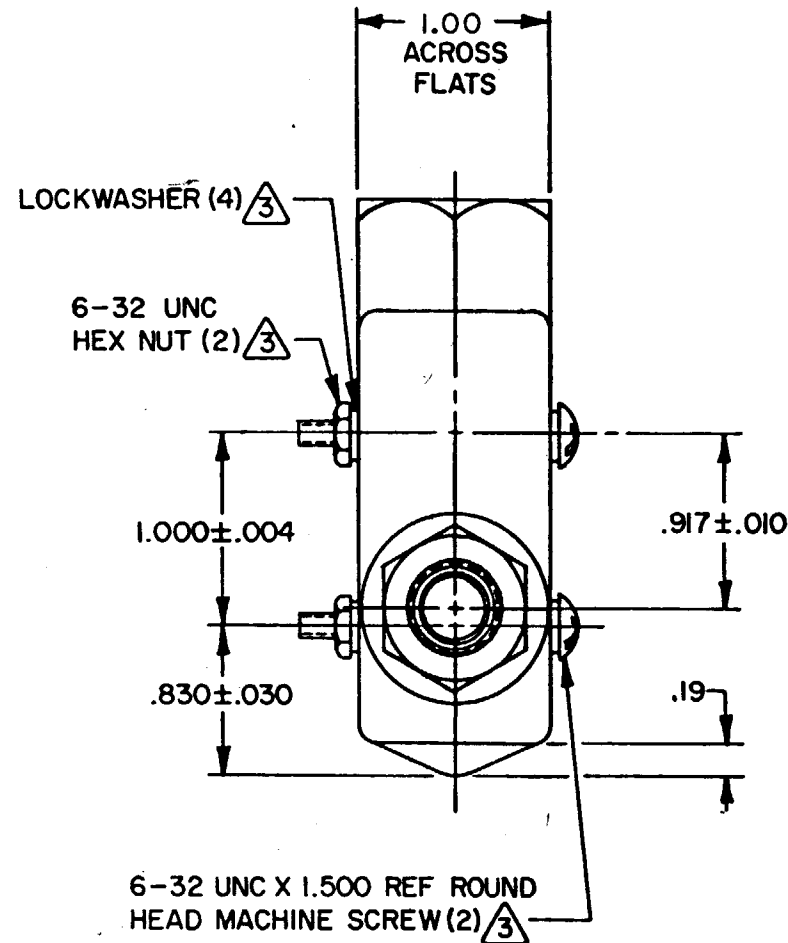

NOTES—

- 1 - ZINC ENCLOSURE FINISHED WITH GRAY PAINT
- 2 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- (3) FURNISHED UNASSEMBLED
- 4 - SEAL RATING: NEMA1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ——— 9-13 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ——— 4 OZ MIN		UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL ——— .002 MAX		DIMENSIONS ARE IN INCHES
OVERTRAVEL ——— .219 MIN		TOLERANCES ARE:
BASIC SWITCH REPLACEMENT ——— BM-2RQ66		ONE PLACE (.0) ± .030
		TWO PLACE (.00) ± .015
		THREE PLACE (.000) ± .005
		ANGLES
		WEIGHT .53 LB

L161
22A-125, 250 OR 480 VAC
1/2HP-125VAC, 1HP-250 VAC

