

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2R21-A2**BZ-2R21-A2**

PAGE 1 OF 1

MDRAWING
NUMBER

6

ISSUE

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO	15200
W L K	16 MAR 64	
B	CO	73287-J
J A L	22 NOV 93	
C	CO	77589
K O R	29 MAR 94	
D	CO	93346
D L T	12 AUG 98	

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

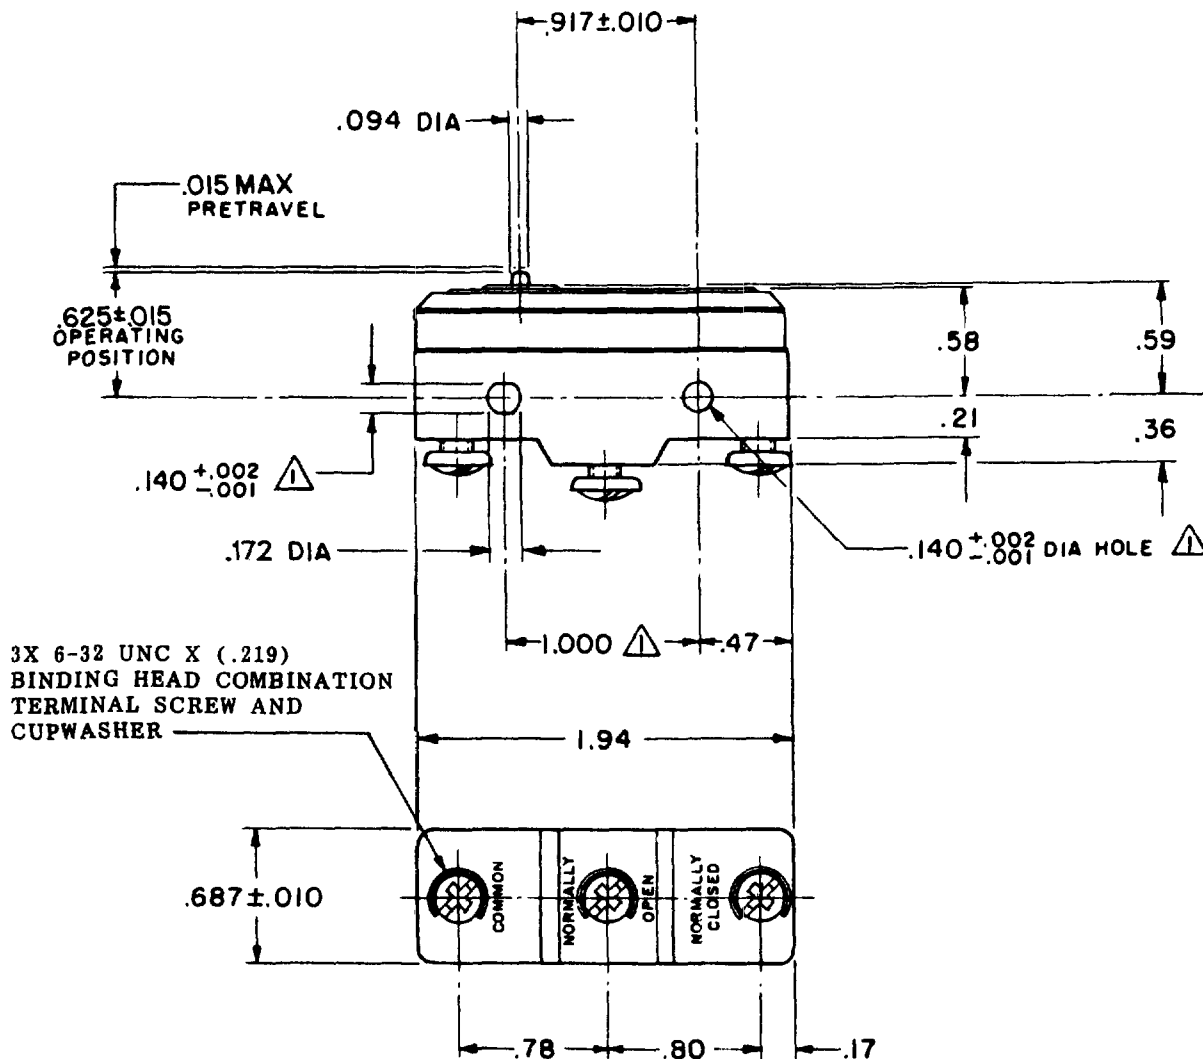

NOTE -

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± 0.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 3-5 OZ

RELEASE FORCE - - - - - 2 1/2 OZ MIN

DIFFERENTIAL TRAVEL - - - - .0004-.0020

OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

UNDERWRITERS LAB. INC. LISTED RATING

-L9-

10A 125, 250 OR 480 VAC
1/2A 125 VDC, 1/4A 250 VDC

-L 288-

**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .060 LB

FORMTEK

DRAWN

W L K 16 MAR 64