


MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RQ172-D6

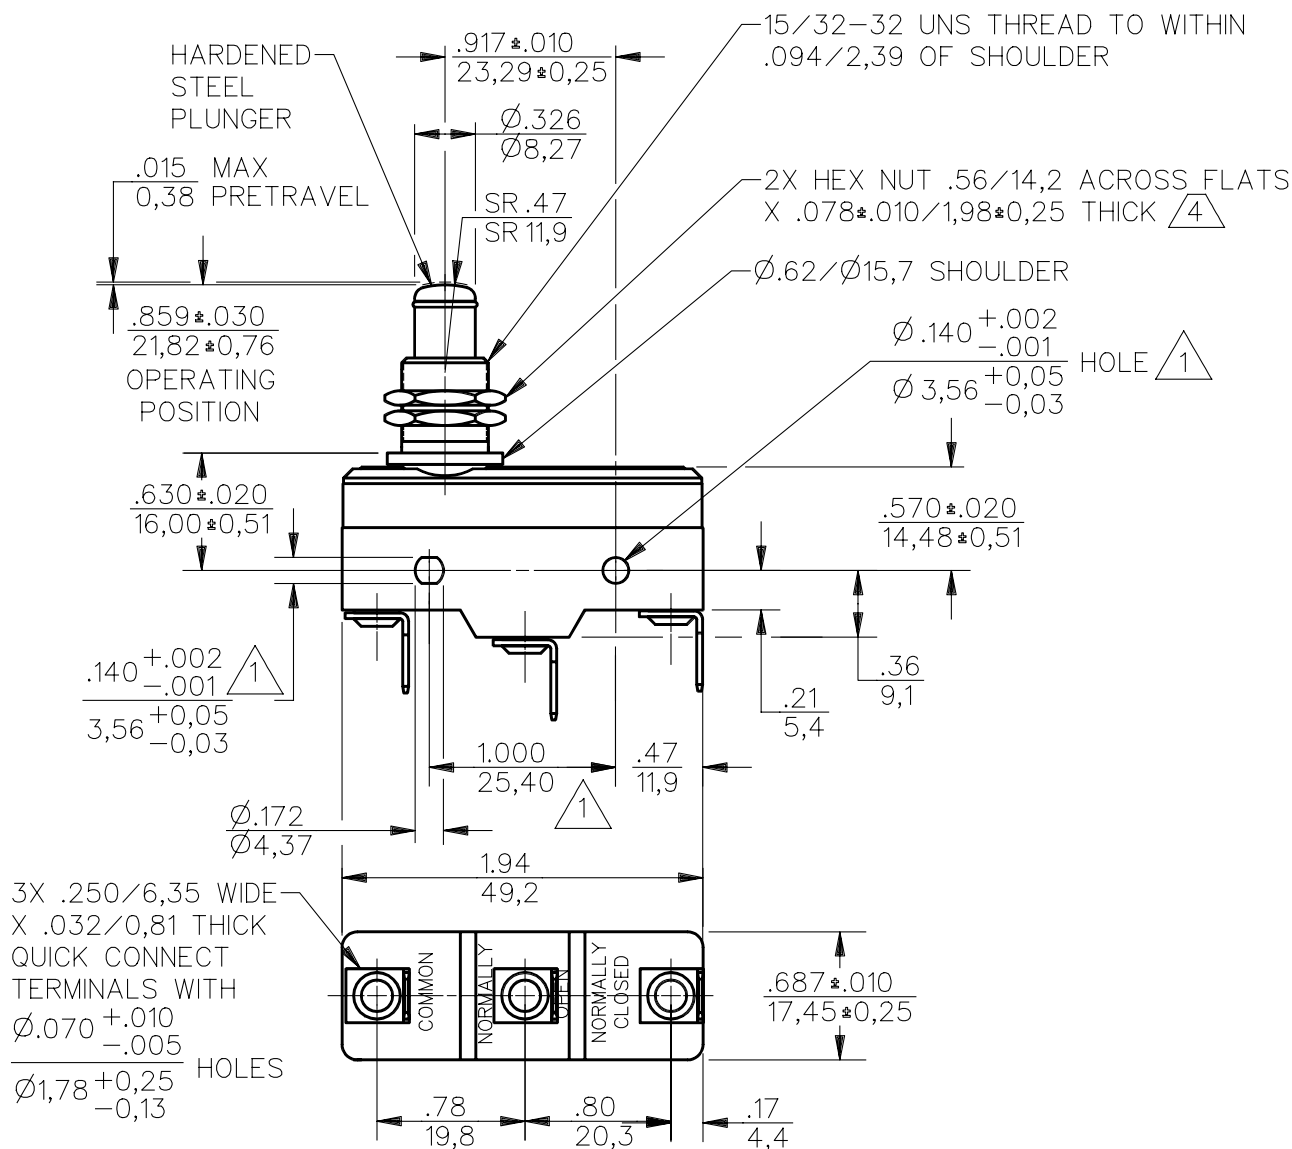


NOTES

- (1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139/3.53 MAX DIA ON 1.000±.002/25.40±0.05 CENTERS
- 2 - CONTACT MATERIAL - GOLD ALLOY
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 180°F/82.2°C
- (4) HARDWARE FURNISHED UNASSEMBLED

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE --- 9 OZ/2.53 N -
13 OZ/3.65 N

RELEASE FORCE --- 4 OZ/1.12 N MIN

DIFFERENTIAL TRAVEL --- .0004/0.010 -
.0020/0.051

OVERTRAVEL --- .219/5.56 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D TL22
1A 125 VAC

SCALE FULL

DO NOT
SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM.	TOL	DIM.	TOL
	mm	mm/in	in	mm/in
NO PLACES	X	1/.04	X.X	0.8/.03
ONE PLACE	X.X	0.4/.016	X.XX	0.38/.015
TWO PLACES	X.XX	0.15/.006	X.XXX	0.13/.005

SI METRIC

US CUSTOMARY

DESIGN UNITS



WEIGHT .094/2.39 LB

