

MICRO SWITCHFREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL

FED MFG CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RQ24-A2

PRODUCT CODE

ALH3600**M** BZ-2RQ24-A2
PAGE 1 OF 1DRAWING
NUMBER

56

ISSUE

REPLACES

RELEASE NO PR-1023

15FEB06

BP

CHECK

23 DEC 67

29 MAR 94

C093346

DLT

11 SEP 98

D 0018692

VKR

15FEB06

E 0033748

BS

12SEP07

PSR

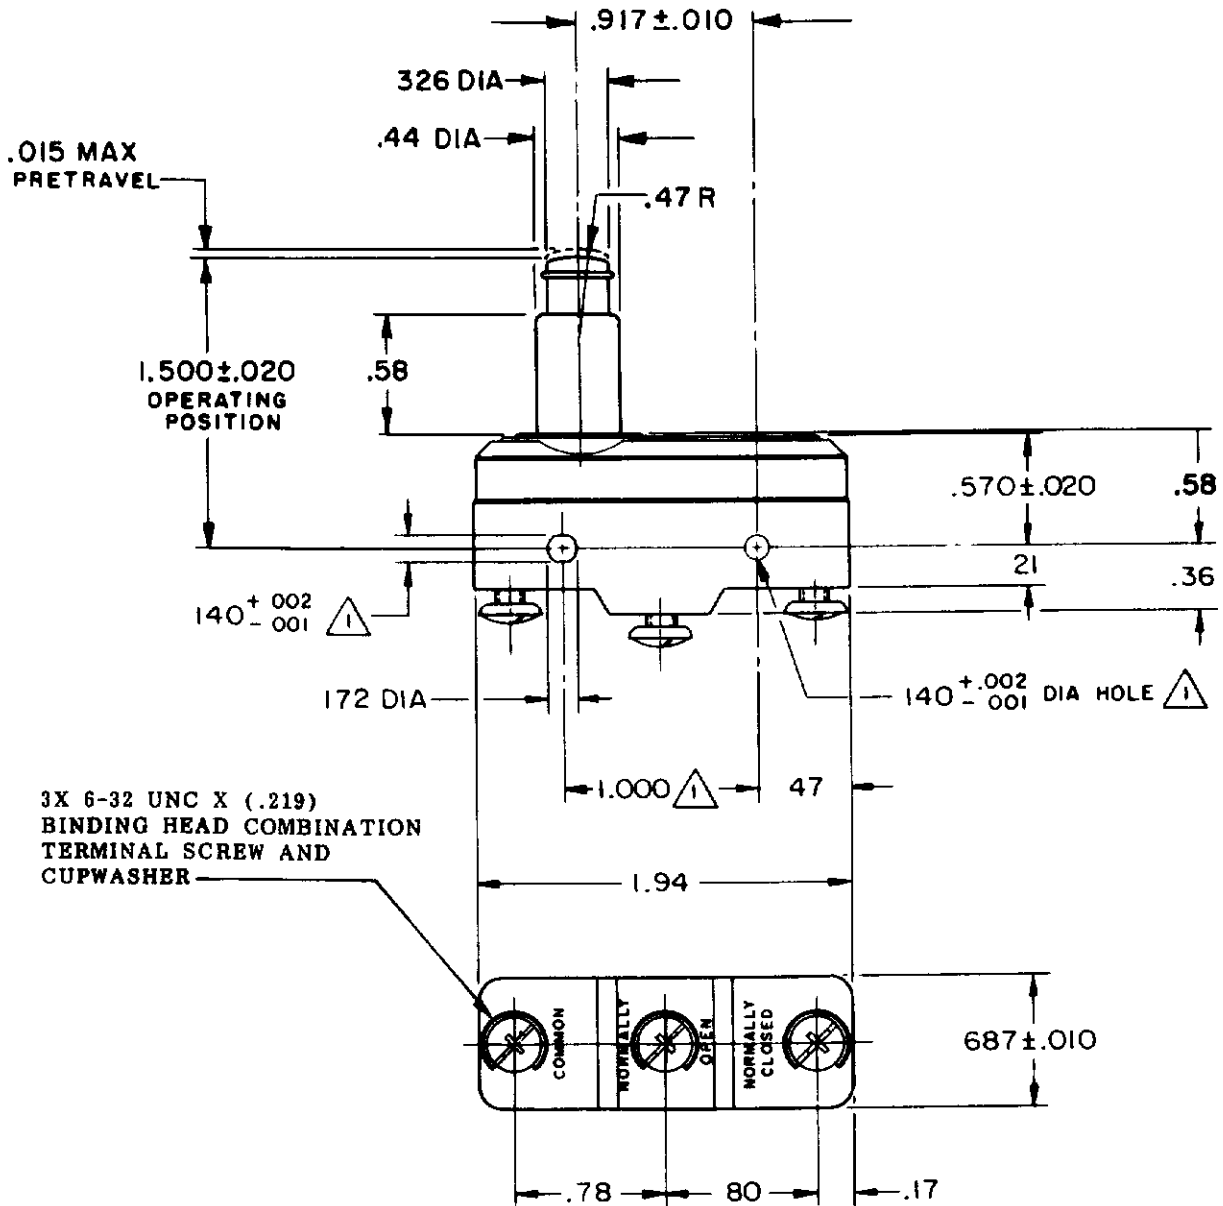
CHECK

16 DEC 69

GCH

DRAWN

FO-50378-1A

**NOTES**

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURES OF 250°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF
HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS

OPERATING FORCE ----- 9 - 13 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL --- 0004 - 0020

OVERTRAVEL ----- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

-L96- 15A-125, 250, OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC
1/8 HP-125 VAC, 1/4 HP-250 VAC (T)

-L288-
-L306-
-L310-
-L315-

CE

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE () ± .030
TWO PLACE (.) ± .015
THREE PLACE (.00) ± .005
ANGLES ±

WEIGHT .086 LB