

MICRO SWITCH

FREEDPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RW8055517-A2

M BZ-2RW8055517-A2

PAGE 1 OF 1

REPLACES X74630-BZ

RELEASE NO. PR-11182

DRAWING
NUMBER

5

ISSUE

REVISIONS

A	C067209	JAP
3	MAY 90	
B	CO-73287-J	JAL
22	NOV 93	
C	CO-77589	TSM
29	MAR 94	
D	C093346	DLT
17	SEP 98	

CHECK

CHECK

11 MAY 82

C E B

CHECK

82


6 MAY

T-SK

FORMTEK

FO-52848-A

DRAWN

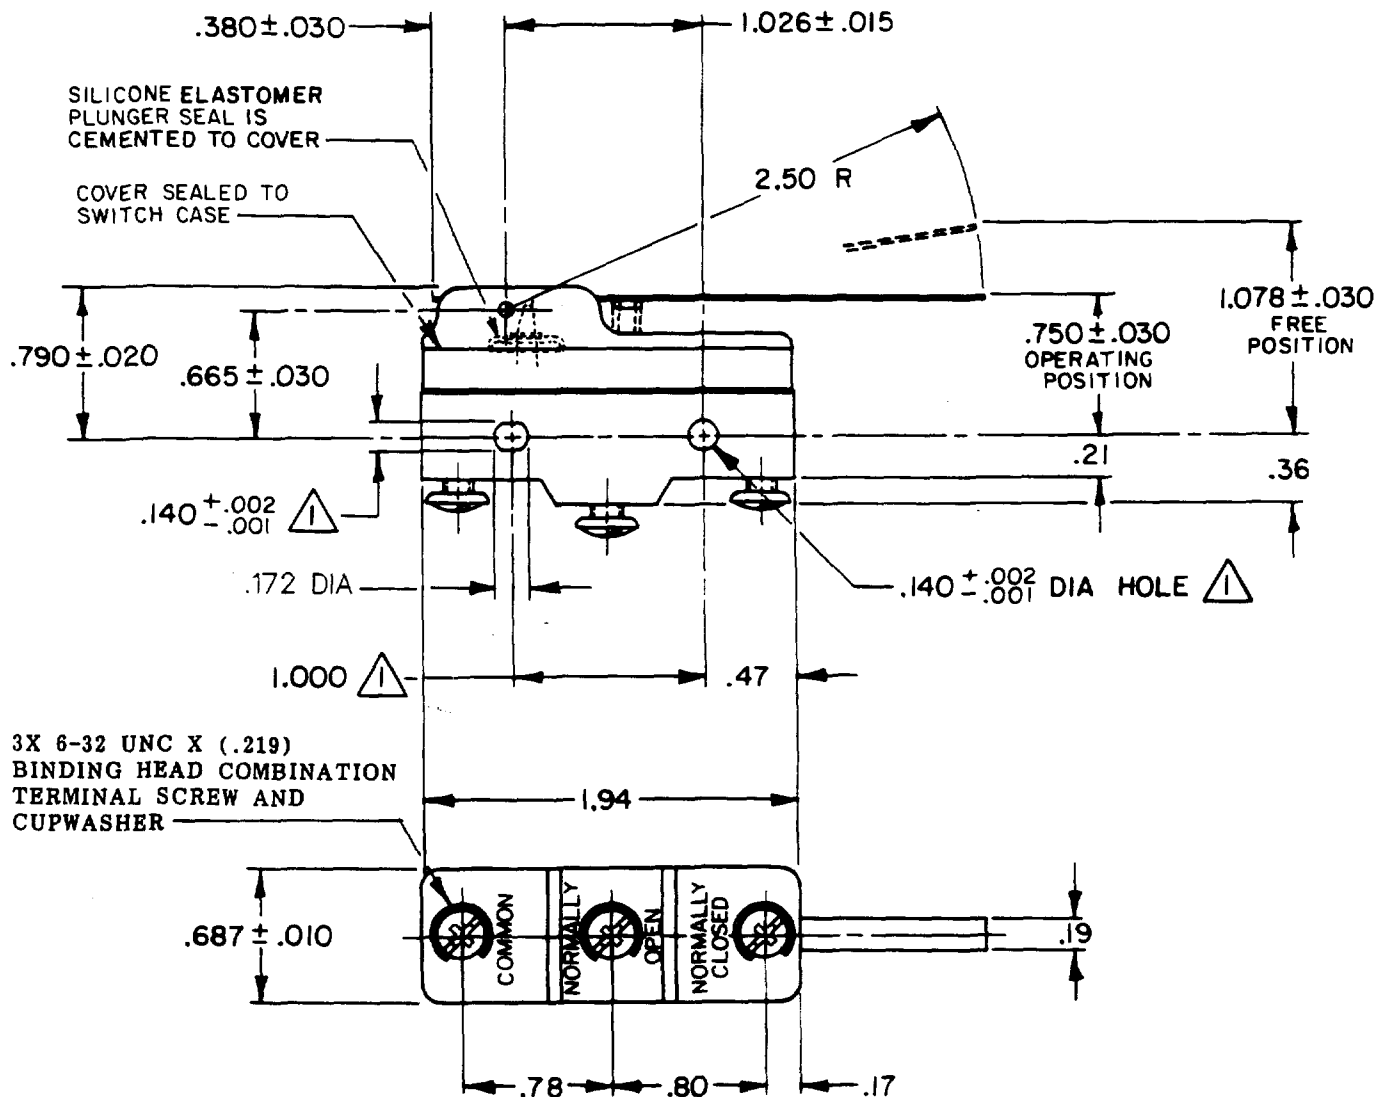


NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE----- 2 1/2 OZ MAX
RELEASE FORCE----- 1/2 OZ MIN
DIFFERENTIAL TRAVEL----- .007 - .050
OVERTRAVEL----- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L98 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306

CE D RJ

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DRW. mm	TOL. mm/in	DRW. in	TOL. mm/in
NO PLACES	X	1/.04	X	0.01/0.25
ONE PLACE	X.X	0.4/.016	X.X	0.007/0.15
TWO PLACES	X.XX	0.16/.006	X.XX	0.001/0.005
THREE PLACES	X.XXX		X.XXX	

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT .073 LB