

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RW82155551-A2

BZ-2RW82155551-A2

M

DRAWING
NUMBER

7

ISSUE

REPLACES

RELEASE NO. CO-34271

PAGE 1 OF 1

CHECK

REVISIONS

A	CO-36635	K S W
B	CO-67209	J A P
C	CO-73287-J	J A L
D	CO-75204-E	W J C
E	CO-77589	M A M
F	CO-93346	D L T

CHECK

5 NOV 74

5 NOV 74

5 NOV 74

5 NOV 74

5 NOV 74


5 NOV 74

5 NOV 74

5 NOV 74

5 NOV 74

5 NOV 74

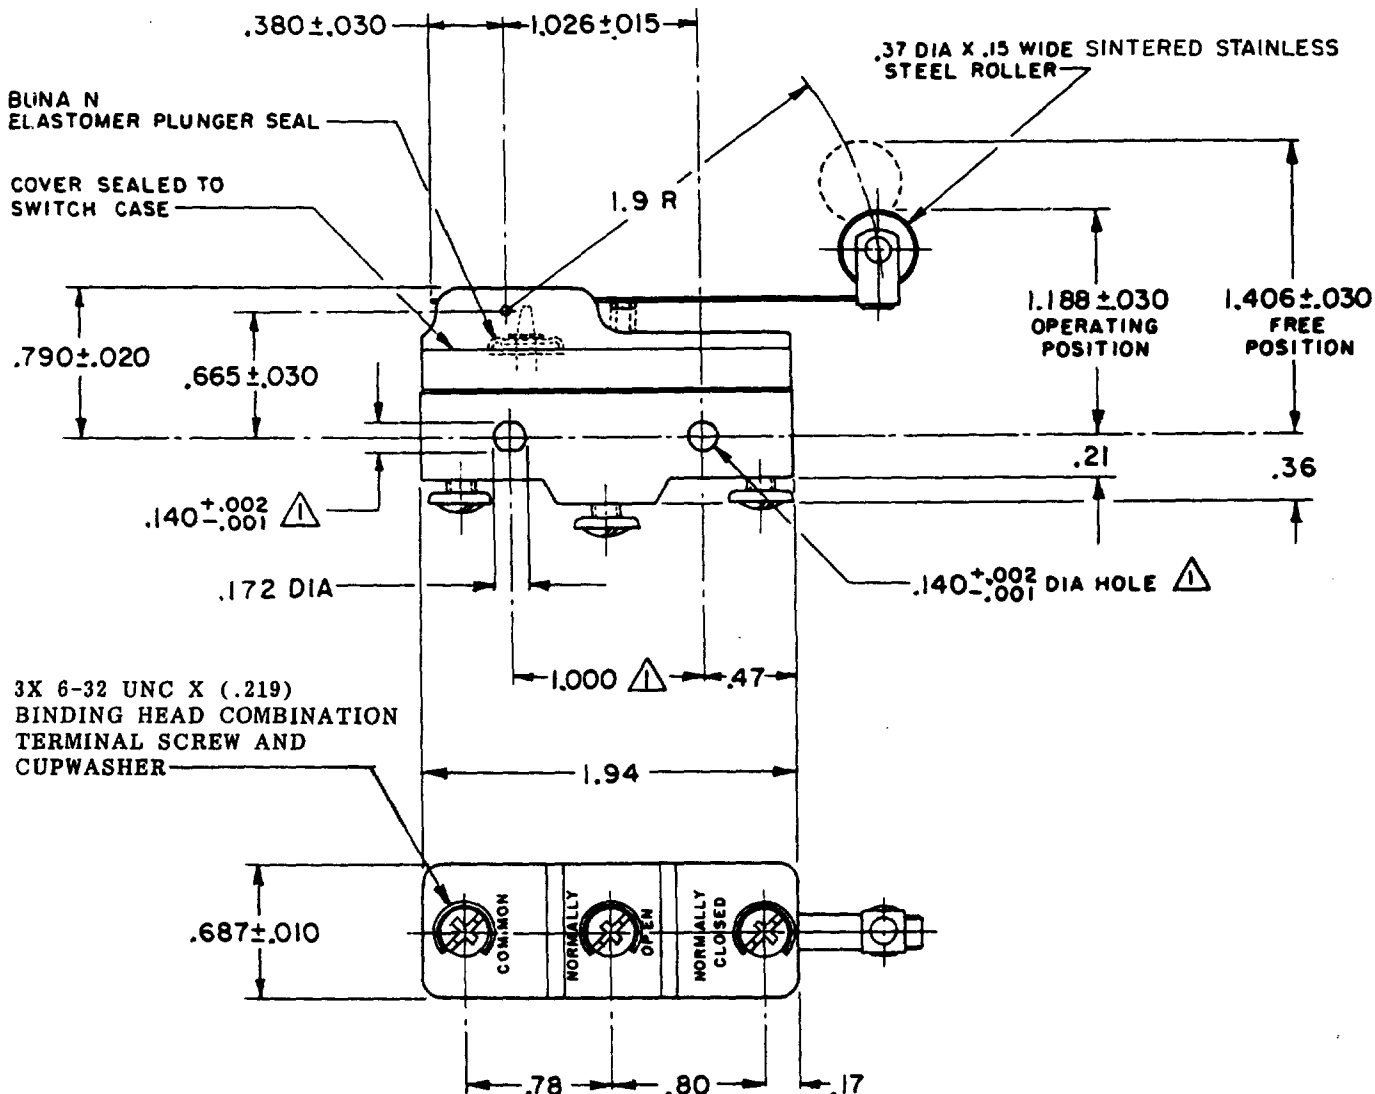


NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE----- 3 1/2 OZ MAX
RELEASE FORCE----- 3/4 OZ MIN
DIFFERENTIAL TRAVEL--- .004- .045
OVERTRAVEL----- .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

10A 125, 250 OR 480 VAC
1/2 A 125 VDC, 1/4 A 250 VDC

UL @ CE L288

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

NO PLACES	DIM.	TOL.	DIM.	TOL.
ONE PLACE	X	1/100	X	0.01
TWO PLACES	X.X	0.01/0.05	X.X	0.001/0.005
THREE PLACES	X.XX	0.001/0.005	X.XX	0.0001/0.0005
ANGLES				

SI METRIC
DESIGN UNITS ☐ US CUSTOMARY ☒

WEIGHT .079 LB

FORMTEK
FO-52848-A

DRAWN

K P K121 OCT 74