

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RW82271**APT8400****BZ-2RW82271**

PAGE 1 OF 1

MDRAWING
NUMBER

X

ISSUE
9

REPLACES

RELEASE NO. SR12229

CHECK

08DEC05

RJ

CHECK

66

23 MAR 66

LSD

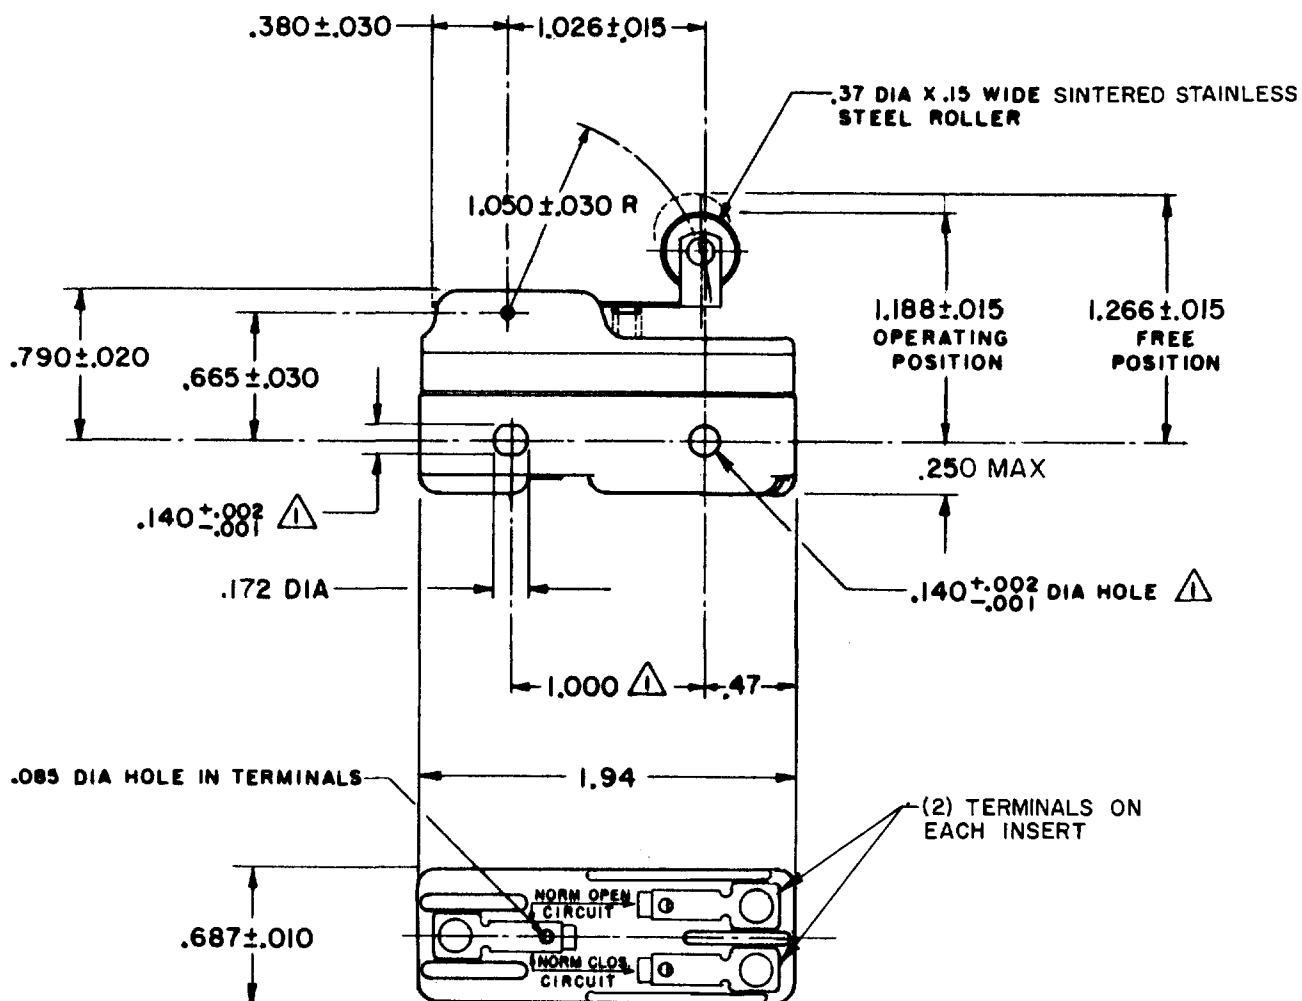
CHECK

66

R L D

24 MAR 66

DRAWN

**NOTE**MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 6 OZ MAX

RELEASE FORCE ----- 1 1/2 OZ MIN

DIFFERENTIAL TRAVEL ----- .003-.020

OVERTRAVEL ----- .094 MIN

ELECTRICAL DATA**CONTACT ARRANGEMENT**

S P D T

-L96- 15 A - 125, 250, OR 480 VAC
1/2 A - 125 VDC; 1/4 A - 250 VDC
1/8 HP - 125 VAC, 1/4 HP - 250 VAC-L288-
-L315-
-L306-

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .063 LB

FORMTEK

FO-50378