

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL.

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-3RW80551-A2-S

BZ-3RW80551-A2-S
PAGE 1 OF 1

REPLACES

RELEASE NO. PR-13648

DRAWING
NUMBER

6

ISSUE

REVISIONS

A	C057092	CJH	1 OCT 85
B	C067209	JAP	3 MAY 90
C	C073287-J	JAL	22 NOV 93
D	C082351	KDR	14 MAR 96
E	C093346	DLT	18 SEP 98

CHECK

CHECK

30 JAN 85


CHECK

28 JAN 85

FORMTEK
FO-52848-A


DRAWN

TAD

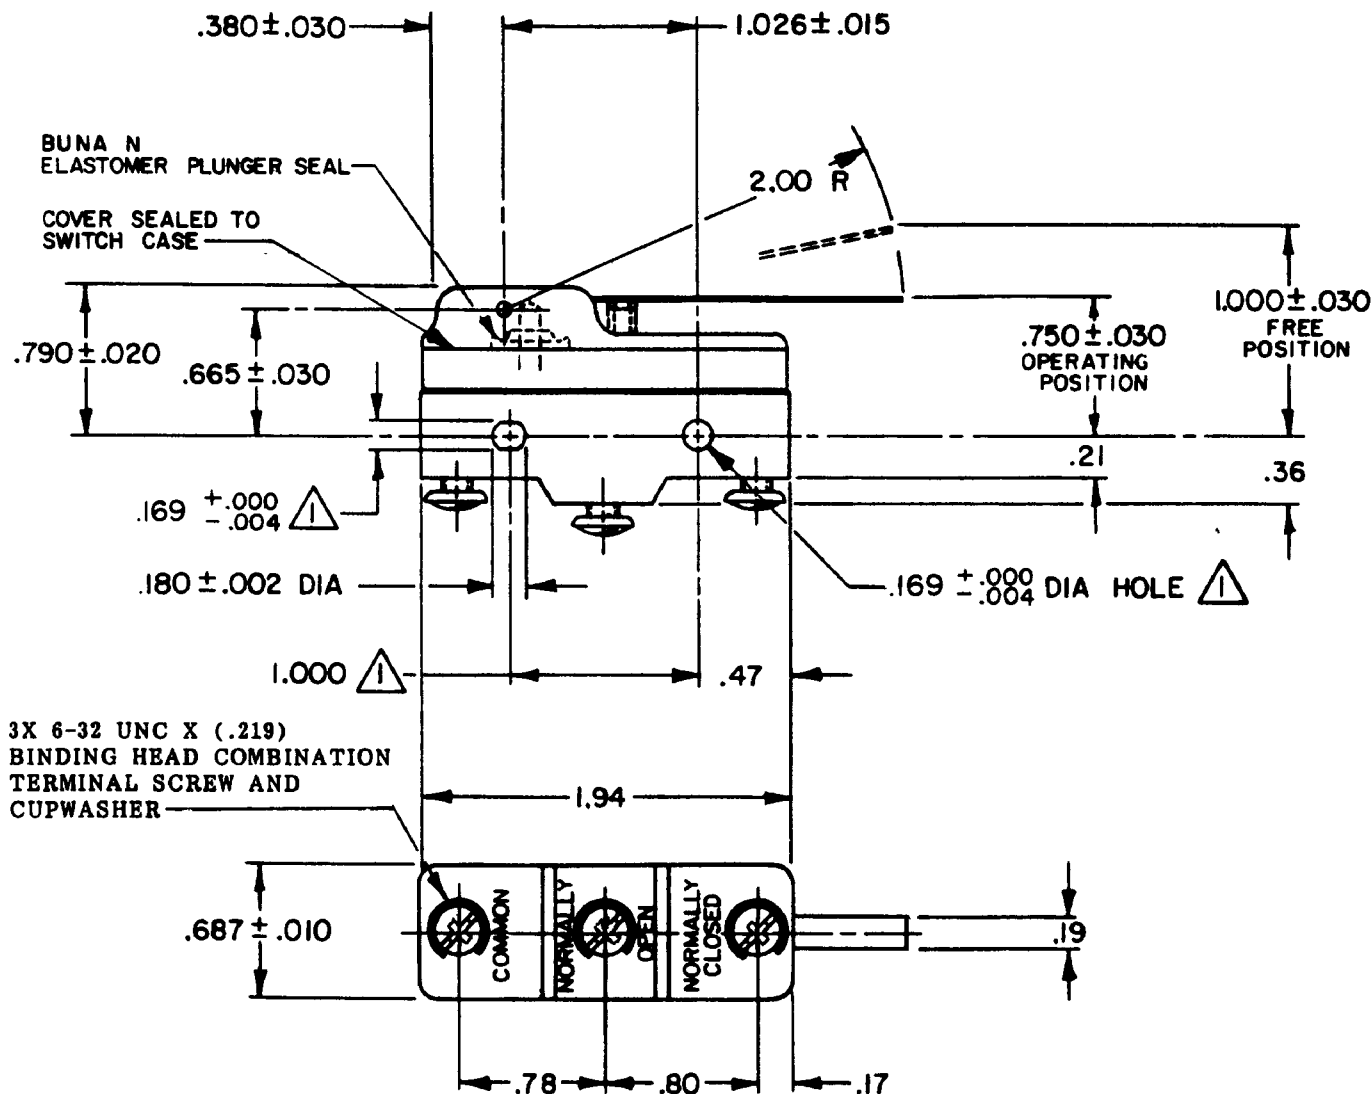

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE - - - - 3 3/4 OZ MAX

RELEASE FORCE - - - - 3/4 OZ MIN

DIFFERENTIAL TRAVEL - - - -.010-.060

OVERTRAVEL - - - - .172 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96

15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

	DES. UNITS	TOL. mm/in	DES. IN	TOL. mm/in
NO PLACES	X	17.00	X	0.0005
ONE PLACE	X,X	0.0005	X,X	0.0005
TWO PLACES	X,X,X	0.0001	X,X,X	0.0001
THREE PLACES	X,X,X,X	0.00005	X,X,X,X	0.00005

DESIGN UNITS ☐ IN METRIC ☒ US CUSTOMARY

WEIGHT - 076 LBS.