

CATALOG LISTING
BZ-3RW822155511T-S
 PAGE 1 OF 1
 ISSUE **4**
 REPLACES X95540-BZ
 RELEASE NO. PR-20518
 CHECK
 11 DEC 08
 17 AUG 98
 11 DEC 08
 28 SEP 93
 23 SEP 93
 RASTER
 DRAWN

MICRO SWITCH
 a Honeywell Division


FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-3RW822155511T-S

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BZ3RW822155511TS) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM.

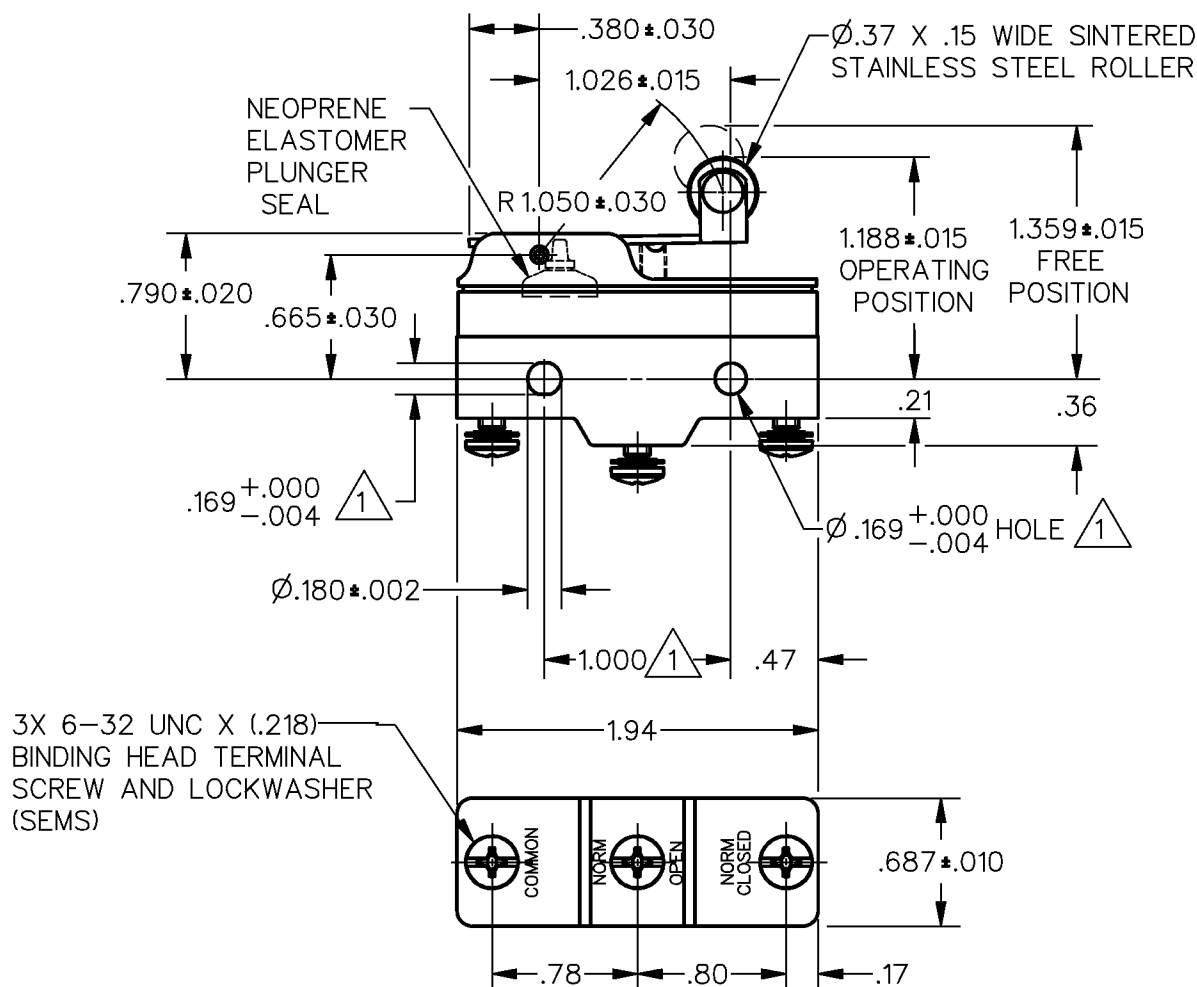


NOTE

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.165 MAX ON 1.000 ± .002 CENTERS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE	NONE	DO NOT SCALE PRINT
OPERATING FORCE — — — 6.5 OZ MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE — — — 1.5 OZ MIN	L9 10A 125, <u>250</u> OR 480 VAC 1/2A 125 VDC, 1/4A 250 VDC L288 CE	ONE PLACE (.0)	± .030	
DIFFERENTIAL TRAVEL — — .007-.030		TWO PLACE (.00)	± .015	
OVERTRAVEL — — — .094 MIN		THREE PLACE (.000)	± .005	
		ANGLES	±	
		WEIGHT .076 LB		