

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PESSENET, ILLINOIS

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-RQX

BZ-RQX
ISSUE 5

REPLACES

RELEASE NO.

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

BZ-RQX

DRAWING
NUMBER

7

ISSUE

REVISIONS

A	CO 16325 GCH 22 JAN 62
B	CO77590 DLT 9 JUN 94

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

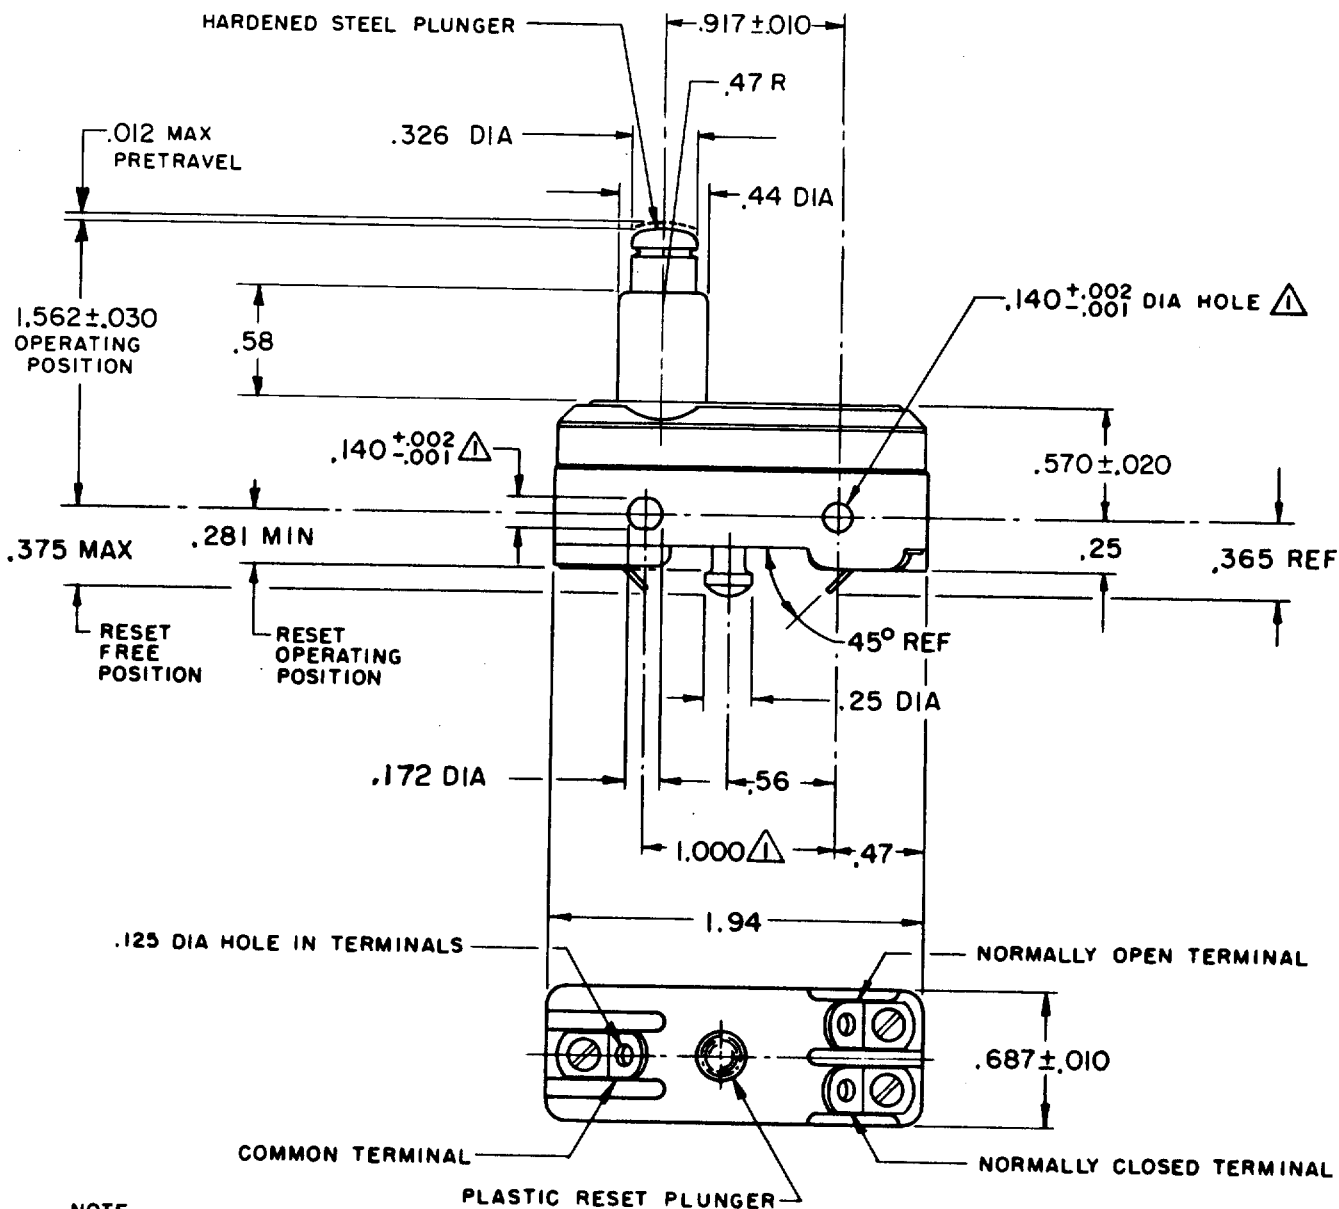

NOTE -

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 6-9 1/2 OZ
OVERTRAVEL ----- .219 MIN

RESET CHARACTERISTICS

OPERATING FORCE ----- 2-10 OZ
OVERTRAVEL ----- .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE DOUBLE THROW
MAINTAINED CONTACT

BREAK DISTANCE
.070 MIN

UNDERWRITERS' LAB. INC. LISTED RATING
15 A-125, 250, OR 480 VAC
-L 67- 1/4 HP-125 VAC; 1/2 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT