

CATALOG LISTING  
**BZ-RW9223312**  
PAGE 1 OF 1

**M**

ISSUE  
**6**

REPLACES

RELEASE NO. PR-8591

CHECK

REVISIONS

|   |               |
|---|---------------|
| A | CO-94212E     |
|   | DCS 17 SEP 99 |
| B | 203222        |
|   | CSL 6 JUN 01  |
| C | 0011943       |
|   | VKR 23MAR05   |

CHECK

17 SEP 99

JAF


CHECK

17 SEP 99

DCS

RASTER

DRAWN

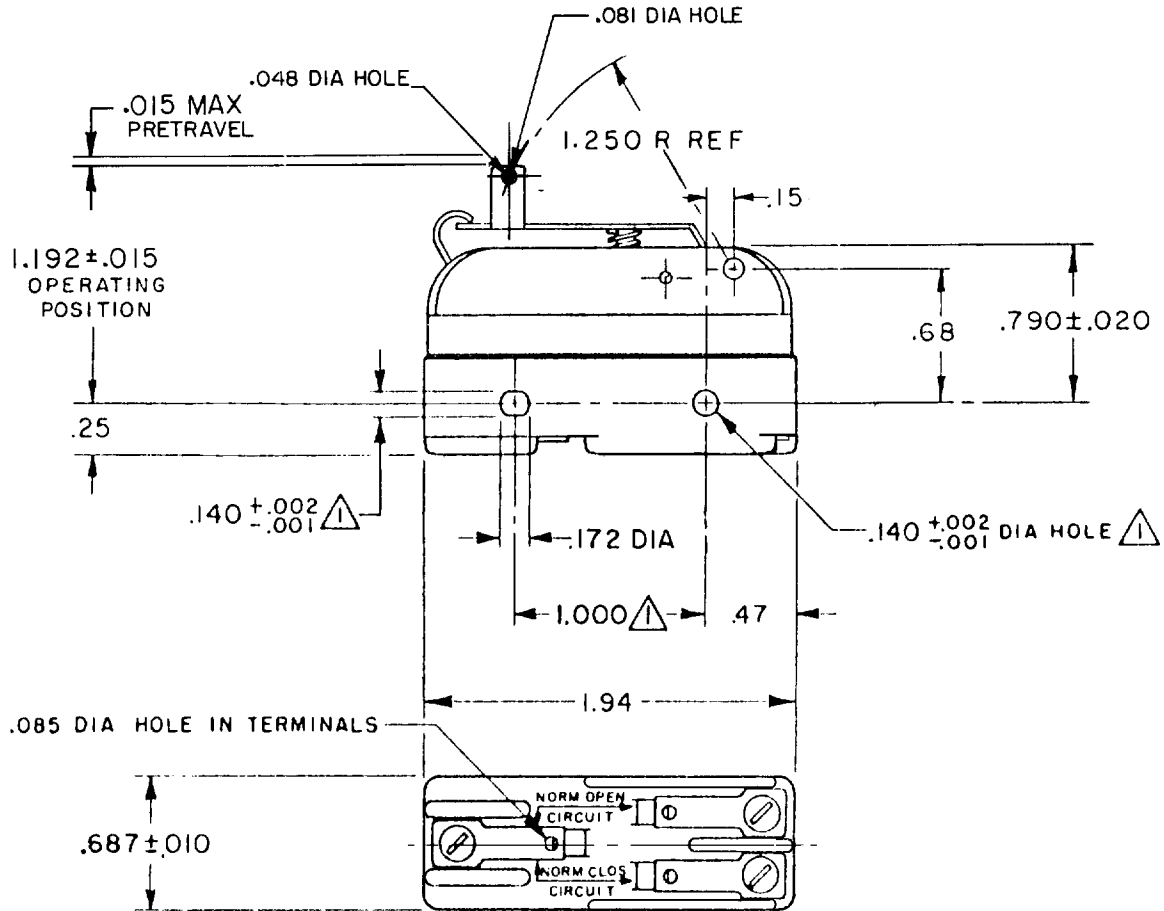


NOTE -

- △ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - PLASTIC PARTS ARE MADE OF MINERAL FILLED PHENOLICS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



| CHARACTERISTICS                 | ELECTRICAL DATA                                                                                                                                                                                                                                                      |  | SCALE FULL                                   | DO NOT<br>SCALE PRINT |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------|-----------------------|
| OPERATING FORCE-----12 OZ MAX   | CONTACT ARRANGEMENT                                                                                                                                                                                                                                                  |  | UNLESS OTHERWISE SPECIFIED<br>TOLERANCES ARE |                       |
| RELEASE FORCE-----4 OZ MIN      | S P D T                                                                                                                                                                                                                                                              |  |                                              |                       |
| DIFFERENTIAL TRAVEL-.0005-.0010 | L95<br>10A 125, <u>250</u> OR 480 VAC<br>1/8HP 125 VAC, 1/4HP <u>250</u> VAC                                                                                                                                                                                         |  | ONE PLACE (.0)                               | ±.030                 |
| OVERTRAVEL-----.100 MIN         |                                                                                                                                                                                                                                                                      |  | TWO PLACE (.00)                              | ±.015                 |
|                                 |                                                                                                                                                                                                                                                                      |  | THREE PLACE (.000)                           | ±.005                 |
|                                 | L288    |  | ANGLES                                       | ±                     |
|                                 |                                                                                                                                                                                                                                                                      |  | WEIGHT                                       |                       |