


X113913-BZ

REPLACES
RELEASE NO. 204010
CHECK
25 SEP 01
SAV
CHECK
25 SEP 01


MICRO SWITCH
a Honeywell Division
FED. MF6. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-RX-D584

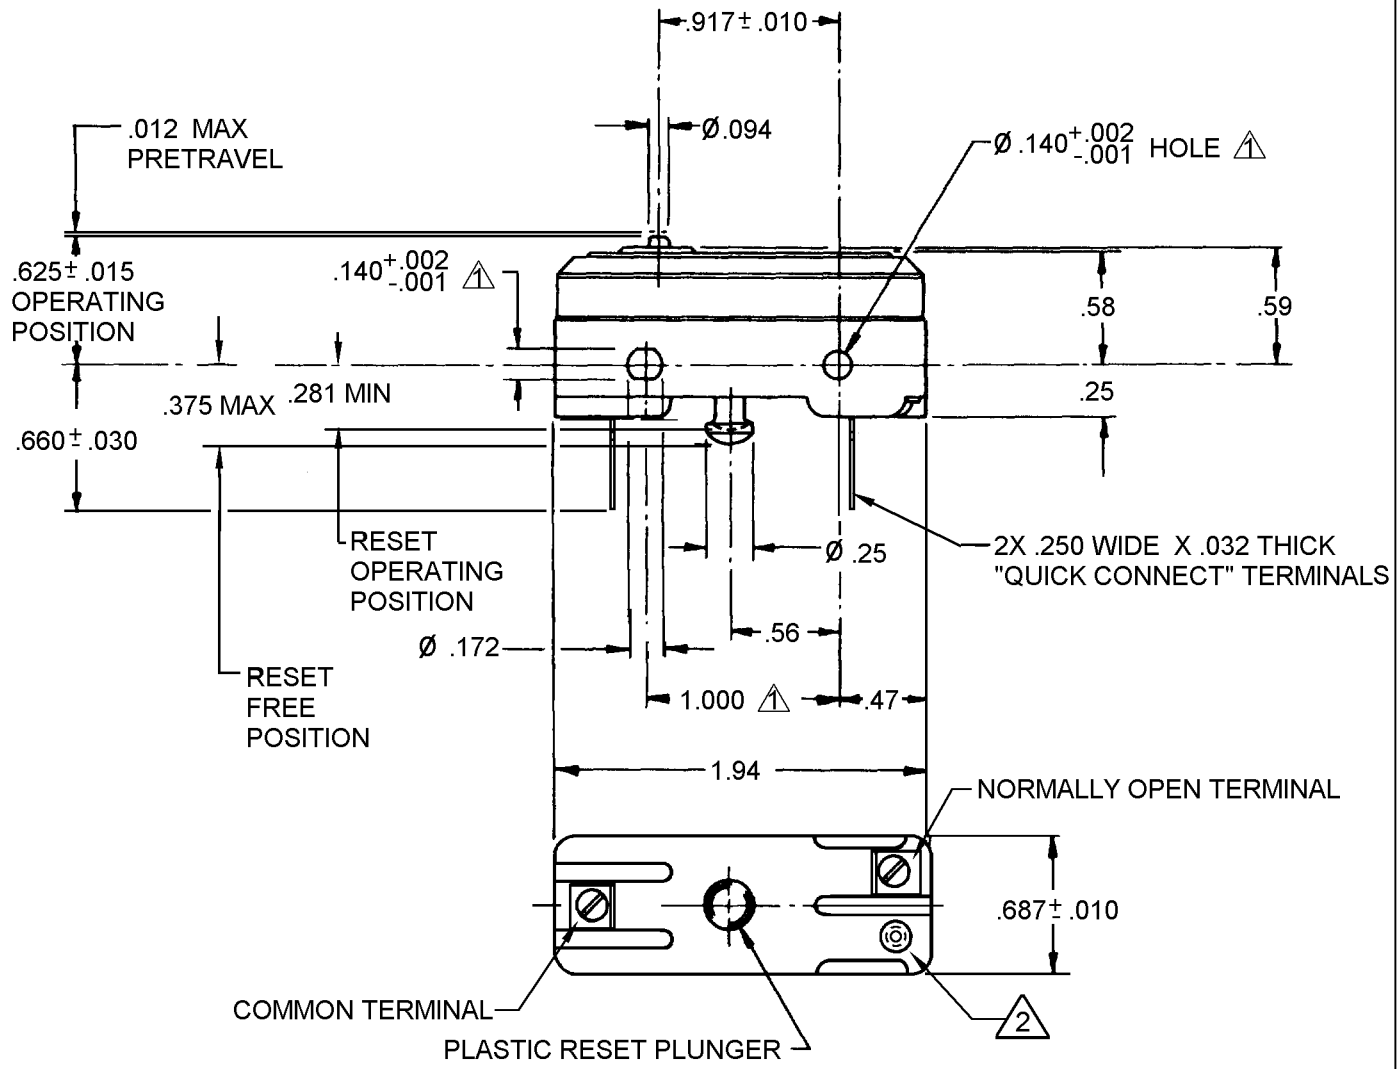

- NOTES
- ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø .139 MAX ON 1.000± .002 CENTERS
 - ▲ NORMALLY CLOSED CIRCUIT LOCATION ELECTRICALLY LIVE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		THIRD ANGLE PROJECTION 			
CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE-----7-9 OZ		CONTACT ARRANGEMENT S.P.D.T.		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
OVERTRAVEL-----.005 MIN				ONE PLACE (.0) ±.030	
RESET CHARACTERISTICS		L67 15A 125, <u>250</u> OR 480 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC FIG. 67 		TWO PLACE (.00) ±.015	
OPERATING FORCE-----2-10 OZ				THREE PLACE (.000) ±.005	
OVERTRAVEL-----.015 MIN				ANGLES ±	
				WEIGHT .055 LB	