Power modul input connector


Plug connector – Solder pin – Angled – Precision machined contacts – Through hole solder type





DESCRIPTION

- 7W2 Combination D-SUB Connector
- Design: 2 power contacts 40 A / 2 signal contacts
- Mounting styles:
 - Mounting bracket with PCB clip, 4-40 UNC threaded insert - Mounting bracket with PCB clip, 4-40 UNC hex bolt
- Note for 9W4 product please contact factory


Product drawing_____






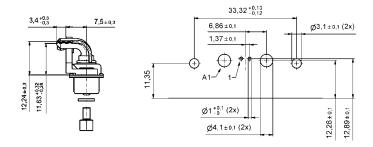

Mounting style: Mounting bracket with PCB clip, 4-40 UNC threaded insert



Mounting style: Mounting bracket with PCB clip, threaded insert and 4-40 UNC hex bolt



ORDER DATA

Plug connector		
Design	Mounting style	Part Number
7W2	Mounting bracket with PCB clip/Threaded insert and 4-40 UNC Hex bolt	13-000091
7W2	Mounting bracket with PCB clip/4-40 UNC Threaded insert	13-000101

PCB clip .122"/3.1 \pm .004"/0.10 mm hole diameter and .063"/1.6 mm circuit board thickness