

—

ORDERING INFORMATION

Temp. Range	Package	Part Number
- 40 °C to 85 °C	miniQFN-10	DG2721DN-T1-E4

TRUTH TABLE

IN ₁ (Pin 10)	IN ₂ (Pin 8)	Function
X	0	COM2 = NC ₂
X	1	COM2 = NO ₂
0	X	COM1 = NC ₁
1	X	COM1 = NO ₁

PIN DESCRIPTIONS

Pin Name	Description
IN ₁	Select Input COM ₁
IN ₂	Select Input COM ₂
NC _{1/2} , NO _{1/2} , COM _{1/2}	Data Channel

ABSOLUTE MAXIMUM RATINGS T_A = 25 °C, unless otherwise noted

Parameter	Limit	Unit
Reference to GND	V+	V
	IN _X , NC _X , NO _X , COM _X ^a	
Current (Any Terminal except IN _X , NC _X , NO _X , COM _X)	30	mA
Continuous Current (IN _X , NC _X , NO _X , COM _X)	± 250	
Peak Current (Pulsed at 1 ms, 10 % duty cycle)	± 500	
Storage Temperature (D Suffix)	- 65 to 150	°C
Power Dissipation (Packages) ^b	miniQFN-10 ^c	mW
ESD (Human Body Model)		kV
	All Pins I/O to GND	
Latch-up (Current Injection)	350	mA

Notes:

a. Signals on IN_X, NC_X, NO_X, COM_X exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

b. All leads welded or soldered to PC board.

c. Derate 2.6 mW/°C above 70 °C.




SPECIFICATIONS V+ = 3.0 V							
Parameter	Symbol	Test Conditions Otherwise Unless Specified	Temp. ^a	Limits - 40 °C to 85 °C			Unit
				Min. ^b	Typ. ^c	Max. ^b	
Analog Switch							
Analog Signal Range ^d	V _{ANALOG}	R _{DS(on)}	Full	0		V+	V
On-Resistance	R _{DS(on)}	V+ = 3.0 V, I _{COM} = 8 mA, V _{NC/NO} = 0.4 V	Room		5.7	7	Ω
			Full			9	
On-Resistance Match ^d	ΔR _{ON}	V+ = 3.0 V, I _{COM} = 8 mA, V _{NC/NO} = 0.4 V	Room		0.35		
On-Resistance Resistance Flatness ^d	R _{ON} Flatness	V+ = 3.0 V, I _{COM} = 8 mA, V _{NC/NO} = 0.0 V, 1.0 V	Room		2		
Switch Off Leakage Current	I _(off)	V+ = 4.3 V, V _{NC/NO} = 0.3 V, 3.0 V, V _{COM} = 3.0 V, 0.3 V	Full	- 100		100	nA
Channel On Leakage Current	I _(on)	V+ = 4.3 V, V _{NC/NO} = 0.3 V, 4.0 V, V _{COM} = 4.0 V, 0.3 V	Full	- 200		200	
Digital Control							
Input Voltage High	V _{INH}	V+ = 3.0 V to 3.6 V	Full	1.3			V
		V+ = 4.3 V	Full	1.7			
Input Voltage Low	V _{INL}	V+ = 3.0 V to 4.3 V	Full			0.5	
Input Capacitance	C _{IN}		Full		5.6		pF
Input Current	I _{INL} or I _{INH}	V _{IN} = 0 or V+	Full	- 1		1	μA
Dynamic Characteristics							
Break-Before-Make Time ^{e, d}	t _{BBM}	V+ = 3.0 V, V _{COM} = 1.5 V, R _L = 50 Ω, C _L = 35 pF	Room		5		ns
			Full				
Turn-On Time ^{e, d}	t _{ON}		Room			30	
			Full				
Turn-Off Time ^{e, d}	t _{OFF}		Room			25	
			Full				
Charge Injection ^d	Q _{INJ}	C _L = 1 nF, R _{GEN} = 0 Ω, V _{GEN} = 0 V	Room		0.5		pC
Off-Isolation ^d	OIRR	V+ = 3.0 V to 3.6 V, R _L = 50 Ω, C _L = 5 pF, f = 240 MHz			- 30		dB
Crosstalk ^d	X _{TALK}				- 49		
Bandwidth ^d	BW	V+ = 3.0 V to 3.6 V, R _L = 50 Ω, C _L = 5 pF, - 3 dB			> 500		MHz
Channel-Off Capacitance ^d	C _{NO(off)}	V+ = 3.3 V, f = 1 MHz			4		pF
	C _{NC(off)}				4		
Channel-On Capacitance ^d	C _{COM(on)}				11		
Channel-to-Channel Skew ^d	t _{SK(O)}	V+ = 3.0 V to 3.6 V, R _L = 50 Ω, C _L = 5 pF			50		ps
Skew Off Opposite Transitions of the Same Output ^d	t _{SK(p)}				20		
Total Jitter ^d	t _J				200		
Power Supply							
Power Supply Range	V+			2.6		4.3	V
Power Supply Current	I+	V _{IN} = 0 V, or V+	Full			2	μA

Notes:


- a. Room = 25 °C, Full = as determined by the operating suffix.
b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
c. Typical values are for design aid only, not guaranteed nor subject to production testing.
d. Guarantee by design, not subjected to production test.
e. V_{IN} = input voltage to perform proper function.
f. Crosstalk measured between channels.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


TYPICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$, unless otherwise noted

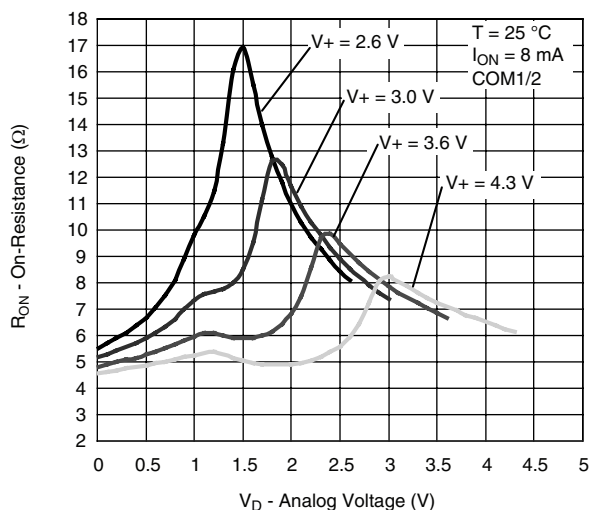


On-Resistance vs. V_D and Single Supply Voltage

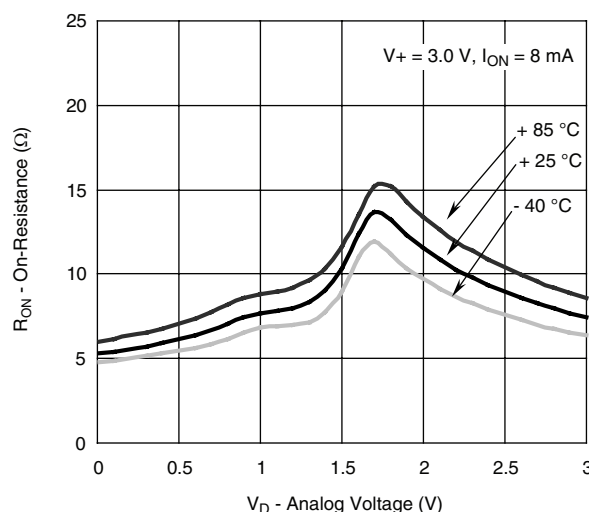


On-Resistance vs. Analog Voltage and Temperature

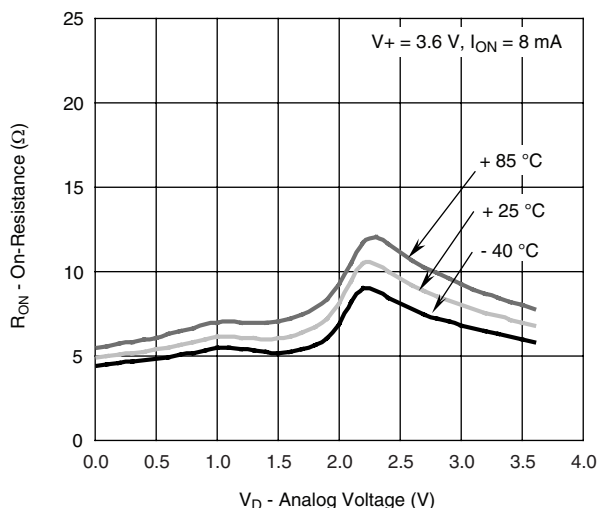


On-Resistance vs. Analog Voltage and Temperature

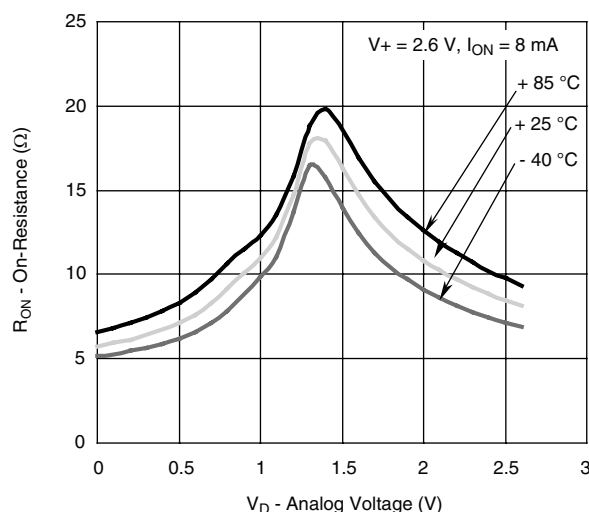

On-Resistance vs. Analog Voltage and Temperature

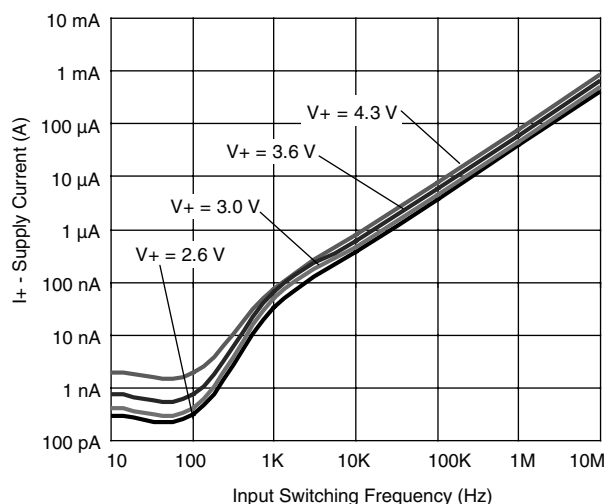


Supply Current vs. Input Switching Frequency

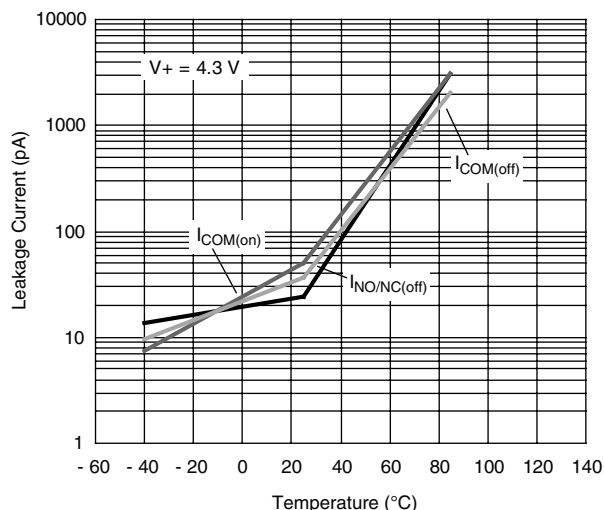


Leakage Current vs. Temperature


TYPICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$, unless otherwise noted

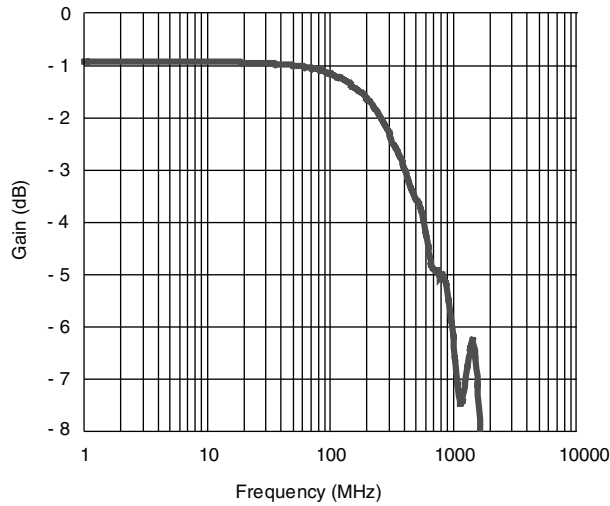

Gain vs. Frequency, $C_L = 5\text{ pF}$, $V_+ = 3.3\text{ V}$

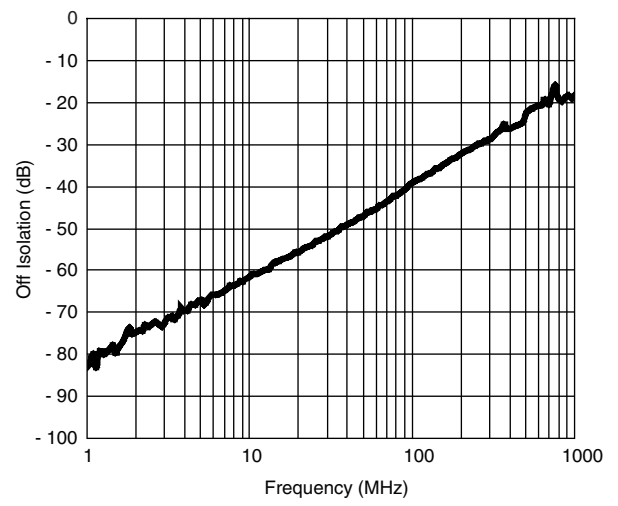


Off Isolation, $V_+ = 3.3\text{ V}$

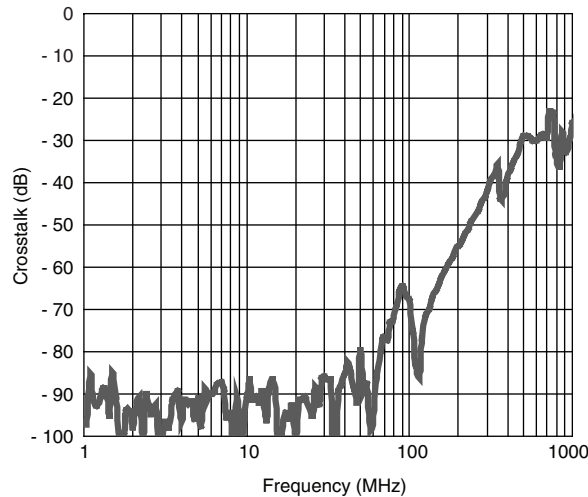


Crosstalk, $V_+ = 3.3\text{ V}$

TEST CIRCUITS

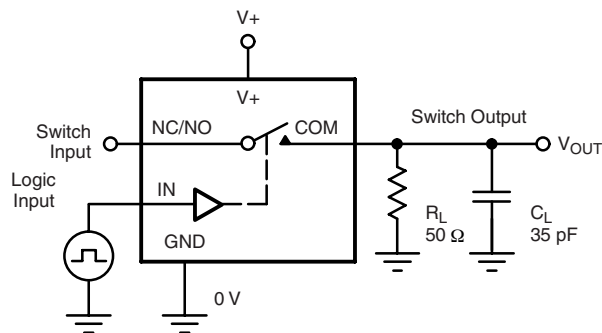

C_L (includes fixture and stray capacitance)

$$V_{OUT} = V_{COM} \left(\frac{R_L}{R_L + R_{ON}} \right)$$

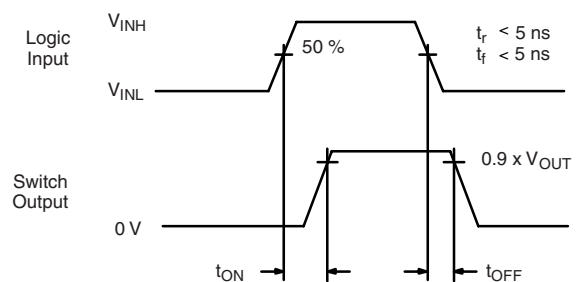

Logic "1" = Switch On
Logic input waveforms inverted for switches that have the opposite logic sense.

Figure 1. Switching Time

TEST CIRCUITS

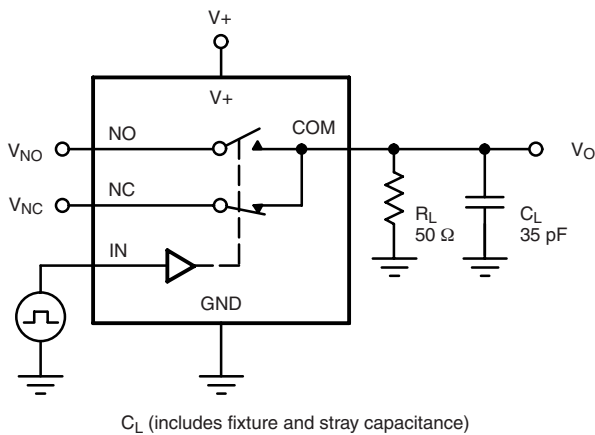


Figure 2. Break-Before-Make Interval

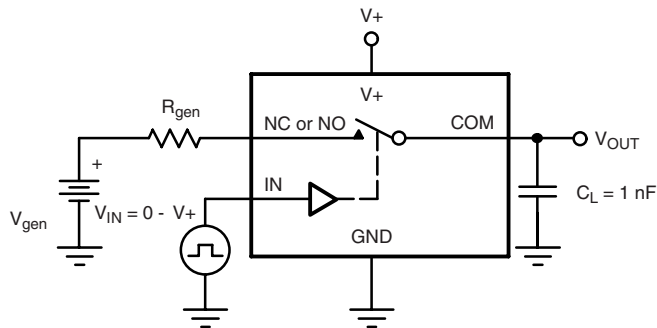


Figure 3. Charge Injection

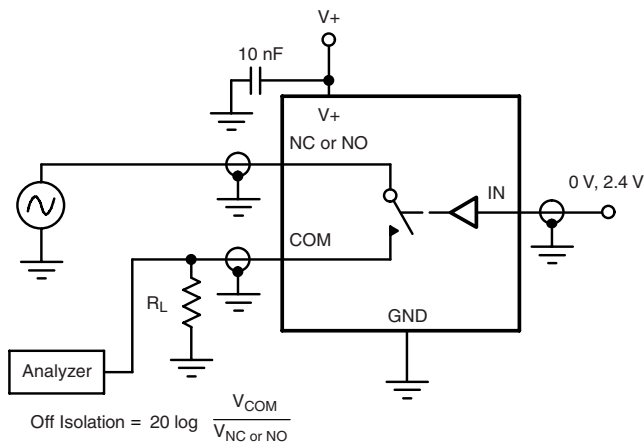


Figure 4. Off-Isolation


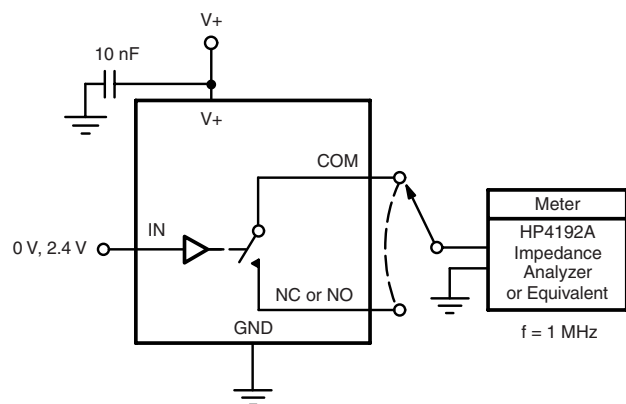


Figure 5. Channel Off/On Capacitance

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg?69950.


MINI QFN-10L CASE OUTLINE

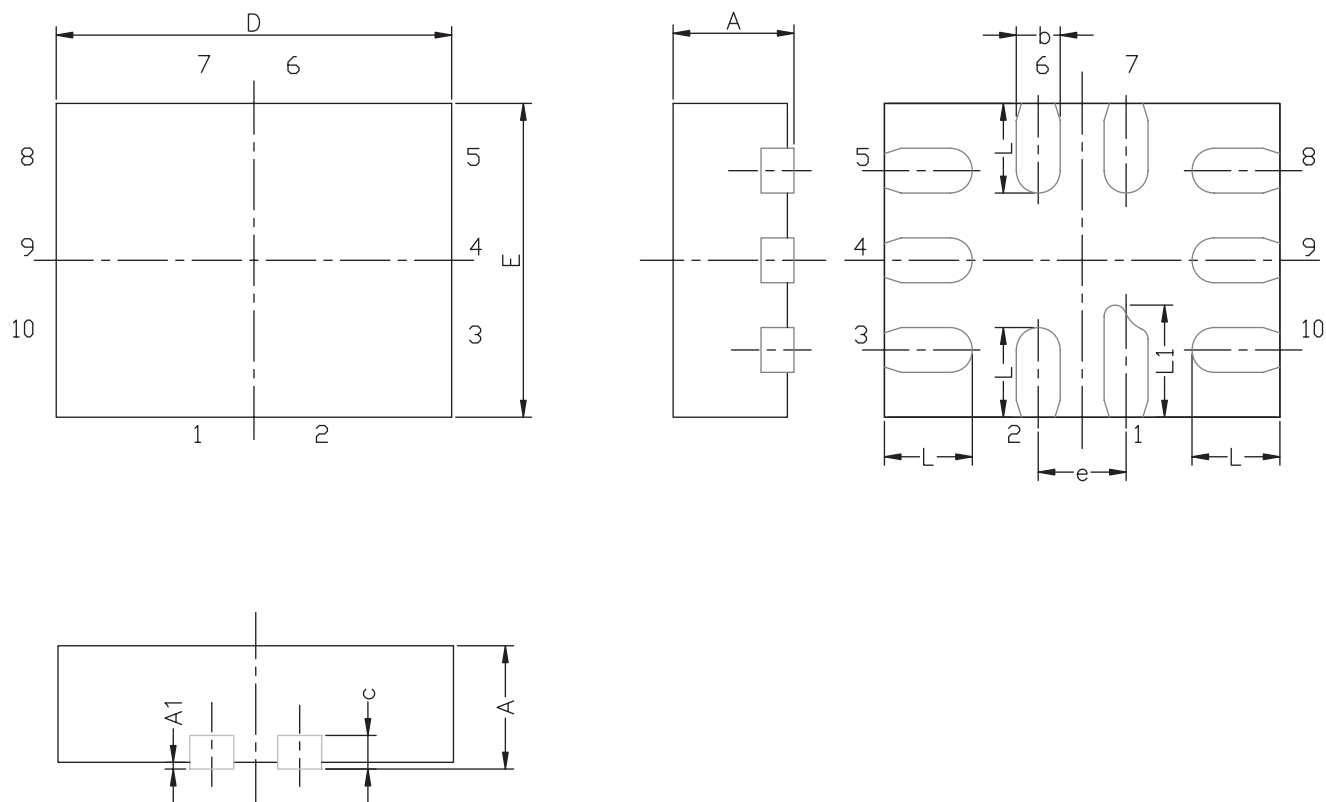

DIM	MILLIMETERS			INCHES		
	MIN.	NAM.	MAX.	MIN.	NAM.	MAX.
A	0.50	0.55	0.60	0.0197	0.0217	0.0236
A1	0.00	-	0.05	0.000	-	0.002
b	0.15	0.20	0.25	0.006	0.008	0.010
c	0.15 REF			0.006 REF		
D	1.75	1.80	1.85	0.069	0.071	0.073
E	1.35	1.40	1.45	0.053	0.055	0.057
e	0.40 BSC			0.016 BSC		
L	0.35	0.40	0.45	0.014	0.016	0.018
L1	0.45	0.50	0.55	0.0177	0.0197	0.0217

ECN T-07039-Rev. A, 12-Feb-07
DWG: 5957

RECOMMENDED MINIMUM PADS FOR MINI QFN 10L

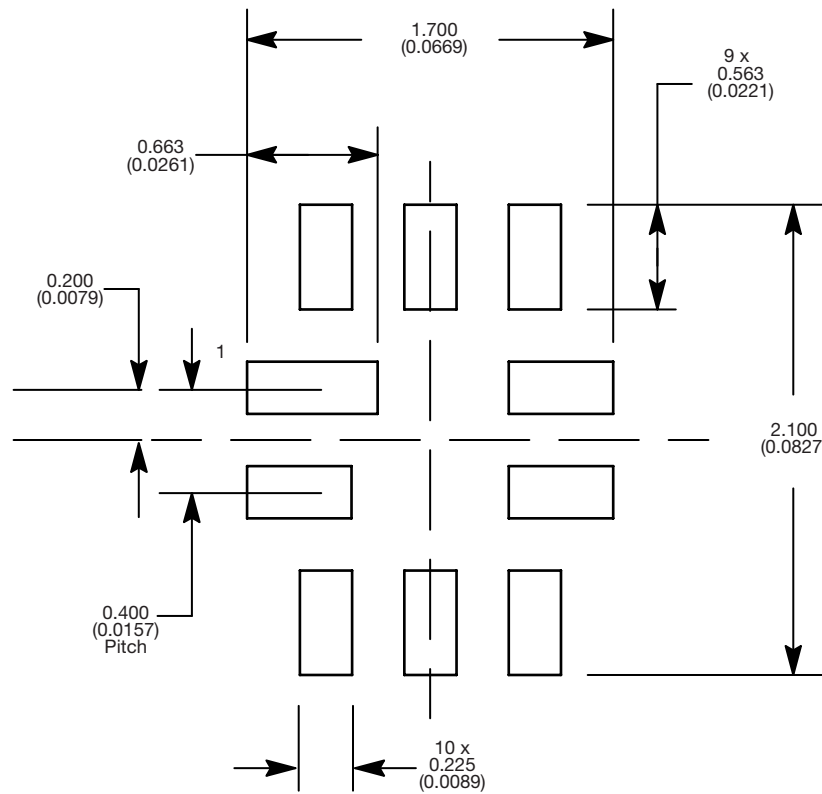

Mounting Footprint
Dimensions in mm (inch)



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.