
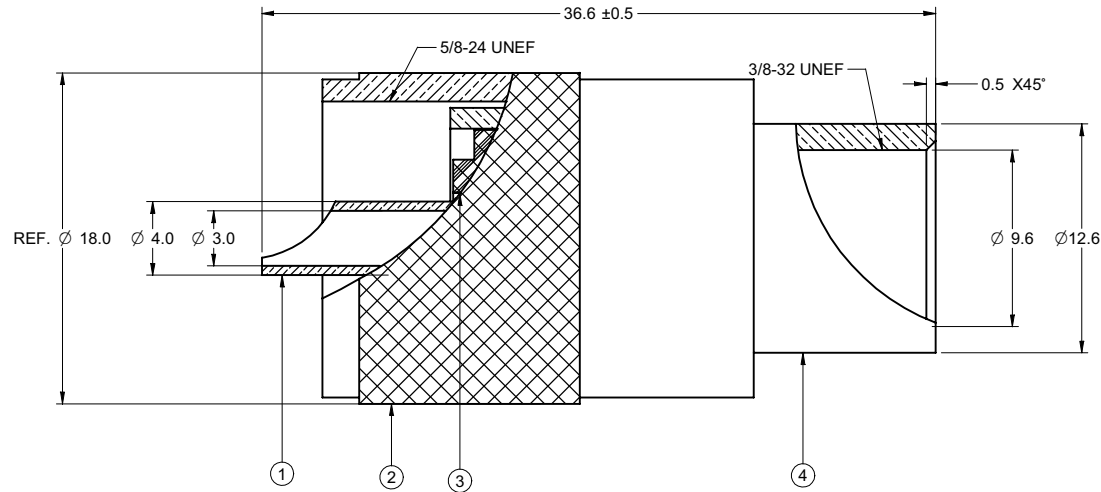


PART NUMBER	ITEM ① CONTACT	ITEM ② NUT	ITEM ③ INSULATOR	ITEM ④ BODY
25-7300	BRASS GOLD PLATED	BRASS NICKEL PLATED	DELTRIN	BRASS NICKEL PLATED


DRAWING NO. 25-7300	
REVISIONS	
A	RELEASE FOR QUATION 11-10-05
B	ADD NOTES 4 & 5 10-31-06
C	CHANGE DIM. $\Phi 12.4$ TO $\Phi 12.6$ ADD DIM. $\Phi 3.2$, Ref. $\Phi 18.0$, $0.5 \times 45^\circ$ DEL. DIM. $\Phi 17.3$ 11-28-06
01	NOTE 2: CABLE RETENTION: 40LBS WAS 20LBS ADD CONTACT RETENTION: 15LBS MIN 01-08-09



受控 CONTROLLED DOCUMENT					
编号 P/N	25-7300	版本 Rev	01	日期 Rel'd Date	Jan9,09

NOTES:

- ELECTRICAL SPECIFICATIONS**
IMPEDANCE: NON-CONSTANT
FREQUENCY RANGE: 0-500 MHz
WORKING VOLTAGE: 500 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS MAX AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM
- MECHANICAL SPECIFICATIONS**
DURABILITY: 500 CYCLES
CABLE RETENTION: 40 LBS MIN, RG-8, RG-213 CABLE
CONTACT RETENTION: 15 LBS MIN
- ENVIRONMENTAL SPECIFICATIONS**
RECOMMENDED TEMPERATURE RANGE: -55 °C TO +85 °C
- PRODUCT SHOULD BE RoHS COMPLIANCE
- PACKAGING REQUIREMENT FOLLOWS ENGINEERING DOCUMENT P/N 836-40200001XX.

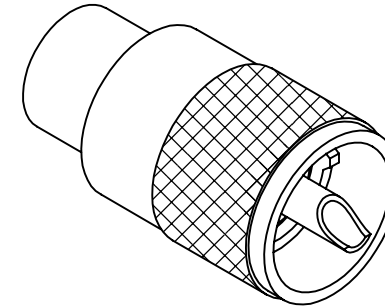

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY BETTY.YU	DATE 01-08-09	EMERSON Network Power Connectivity Solutions
DECIMALS	mm	CHECKED BY BETTY.YU	DATE 01-08-09	
X	± 0.5	APPROVED BY THOMAS	DATE 01-08-09	
X.X	+ 0.2			
X.XX	+ 0.1			TITLE PL 259 MALE SOLDER UHF 20 LBS, RG8, RG213
ANGLES	± 0.5°	U/M	mm	SHEET 1 OF 1
THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.				DRAWING NO. 25-7300
				SIZE C