




DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EMERSON CONNECTIVITY SOLUTIONS AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION

# REVISIONS

REV	DESCRIPTIONS	DATE	APPROVED
H	ECO 53006	2/7/11	T. KOHLER

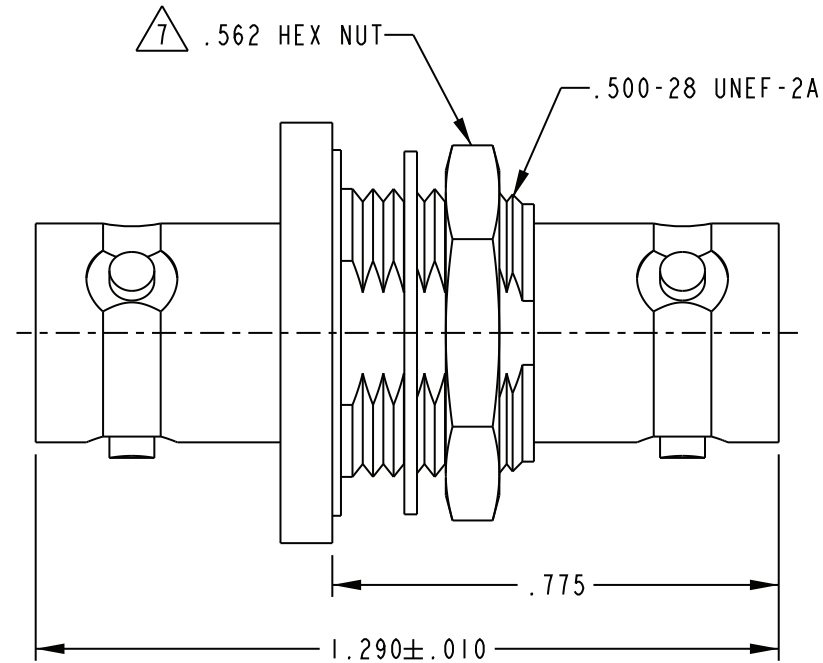

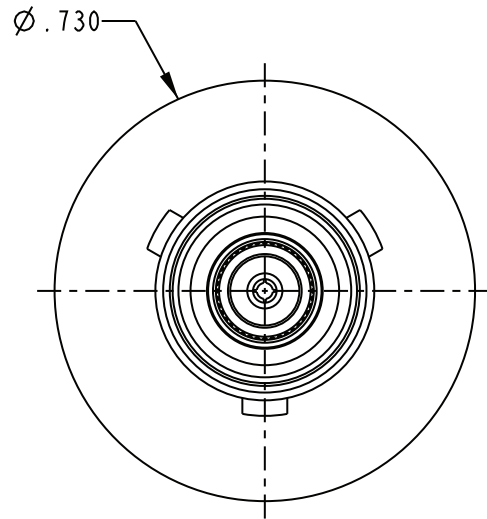

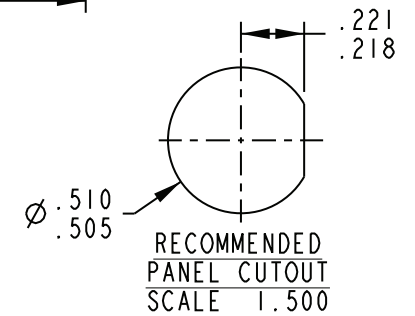
BJT78HS SHOWN



- △ FOR BJT78HSS, 5/8 HEX NUT.
6. FOR BJT78HSS, REPLACE 8-1520-17 WITH 805-1304-3
5. MATERIAL & CONSTRUCTION: MEET THE REQUIREMENTS OF MIL-C-49142 WHERE APPLICABLE.
4. DIELECTRIC WITHSTANDING VOLTAGE: 500 V COMMON MADE VOLTAGE BETWEEN CIRCUITS.
3. LEAK RATE:  $1 \times 10^{-8}$  CC/SEC MAX OF TRACER GAS AT ATMOSPHERIC PRESURE.
2. HERMETICALLY SEALED TWINAX/TRIAX FEED THRU ADAPTER FOR MOUNTING IN BULKHEAD .187 THK MAX.
- △ PASSIVATED STAINLESS STEEL.

NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.		TOL: UNLESS SPECIFIED. .XX ± .XXX ± .005 .XXXX ± ANGLE ±		 Connectivity Solutions 299 Johnson Ave. Ste. 100 Waseca, MN 56093 1-800-247-8256			
DRN C. WALLACE	4/7/11	MATERIAL: 		TITLE:  BJ78HS, BJ78HSS			
CHK T. KOHLER	4/8/11	FINISH: 					
QUALITY							
MANUF							
APPROVED				SIZE A	CAGE CODE 14949	DRAWING NO. 305-0063	REV. H
PROT FILE NO. 305-0063		DO NOT SCALE DWG		SCALE 2/1	DATE 5/5/11	SHEET 1 OF 2	