

Pressure Sensor of Stainless Steel Construction is Ideal for a Wide Range of Applications

- Incorporates double diaphragms consisting of SUS316L stainless steel and silicone diaphragms that are applicable to a variety of gases and liquids.
- Pressure sensing range of 0 to 490 kPa (0 to 5 kgf/cm²) or 0 to 980 kPa (0 to 10 kgf/cm²) is available.
- Two models are available according to the application.
- Linear output of 4 to 20 mA.
- Conforms to IEC IP66 and washable with water.





Ordering Information

Pressure range	Output configuration	Model
0 to 5 kgf/cm ² (0 to 490 kPa)	Linear output (4 to 20 mA)	E8AA-M05
0 to 10 kgf/cm ² (0 to 980 kPa)		E8AA-M10

Application Examples

- **Semiconductor Manufacturing Equipment:** Pressure monitoring and control
- **Automatic Assembly Equipment:** Pneumatic pressure control
- **Robots:** Pneumatic pressure control
- **Production Lines:** Pneumatic pressure control
- **Industrial Material Pneumatic Transportation Systems**
- **Pressure Tank:** Pressure control
- **Tank Level Control**

Ultrasonic Cleaning System

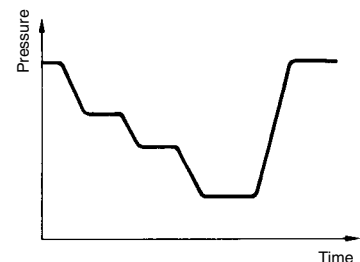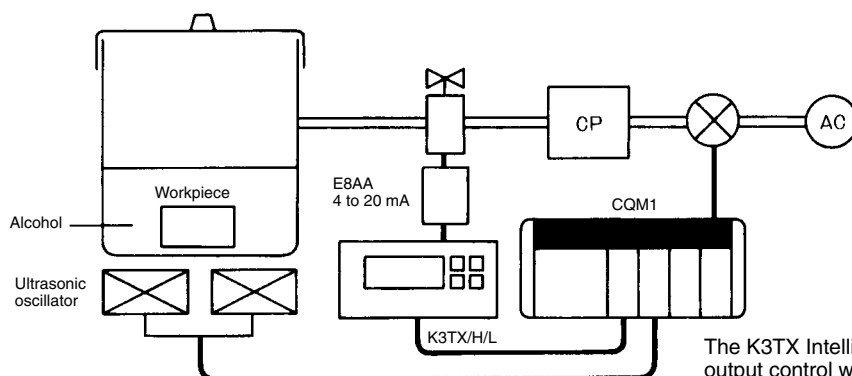

The K3TX Intelligent Signal Processor will be in multi-step output control with the analog output of the E8AA and then the peripheral devices will be in multi-step feedback control with the CQM1 Programmable Controller.

Specifications

■ Ratings

Item/Model	E8AA-M05	E8AA-M10
Supply voltage	12 to 24 VDC $\pm 10\%$, ripple (p-p): 5% max.	
Current consumption	40 mA max. (standard value including 20-mA output current) at rated pressure	
Pressure type	Gauge pressure	
Pressure range	0 to 490 kPa (0 to 5 kgf/cm ²)	0 to 980 kPa (0 to 10 kgf/cm ²)
Withstand pressure	980 kPa (10 kgf/cm ²)	2.0 MPa (20 kgf/cm ²)
Applicable material	Non-corrosive gasses, non-corrosive liquids, inert gasses	
Accuracy (linear output)	$\pm 1\%$ FS max. with a resistive load of 150 Ω at 23°C	
Hysteresis (linear output)	$\pm 0.5\%$ FS max.	
Linearity (linear output)	$\pm 1\%$ FS max.	
Response time	100 ms max.	
Linear output	4 to 20 mA with a permissible resistive load of 300 Ω max.	
Ambient temperature	Operating: -10°C to 60°C (with no icing) Storage: -25°C to 70°C	
Ambient humidity	35% to 95% (with no condensation)	
Pressure leading part	R(PT) 1/4	


■ Characteristics

Item/Model	E8AA-M05	E8AA-M10
Temperature influence	$\pm 0.09\%$ FS/ $^{\circ}\text{C}$ max. between -10°C and 60°C	
Voltage influence	Max. output current fluctuation of $\pm 0.5\%$ FS at 12 VDC $\pm 10\%$ or 24 VDC $\pm 10\%$ with a ripple of 5%	
Insulation resistance	100 M Ω min. (at 500 VDC) between current carry parts and case	
Dielectric strength	1,000 VAC, 1 min	
Vibration resistance	Destruction: 10 to 500 Hz, 1.5-mm double amplitude or 100 m/s ² (approx. 10G) for 2 hours each in X, Y, and Z directions	
Shock resistance	Destruction: 1,000 m/s ² (approx. 100G) 3 times each in X, Y, and Z directions.	
Degree of protection	IEC60529 IP67	
Material	Pressure port and casing: SUS316 Diaphragm: SUS316L O-ring: Fluorocarbon rubber	
Cord	Vinyl-insulated round cord, 6 dia. with 3 cores Standard length: 2 m	
Weight	Approx. 250 g	

Engineering Data


Temperature vs. Output Current Fluctuation (Typical)

E8AA-M10

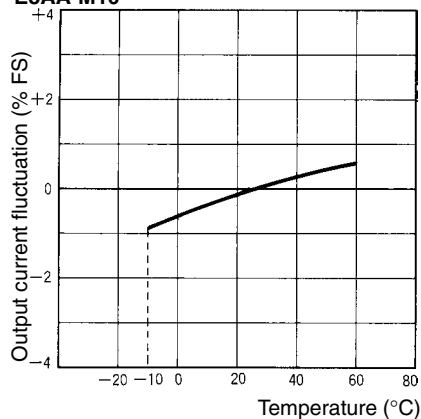


Linearity (Typical)

E8AA-M05

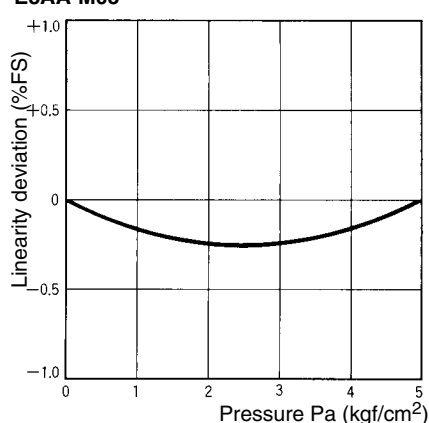


Voltage vs. Output Current Fluctuation (Typical)

E8AA-M10

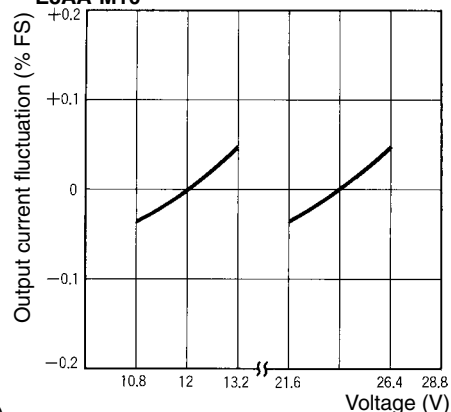


Pressure vs. Output Current (Typical)

E8AA-M05 (E8AA-M10)

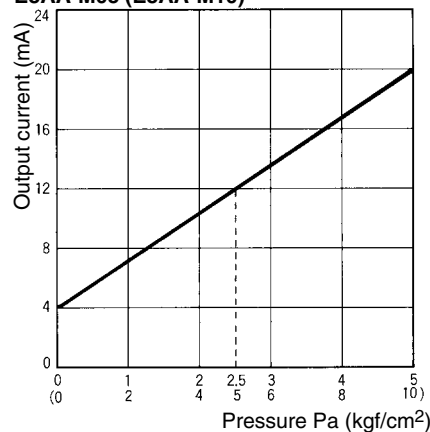


Load vs. Output Current (Typical)

E8AA-M05

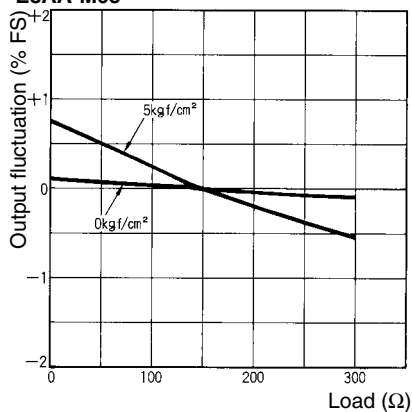


Load vs. Output Current (Typical)

E8AA-M10

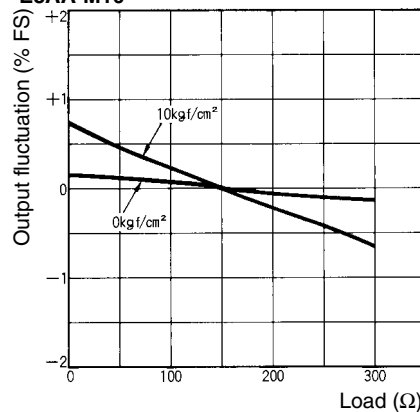


Nomenclature


■ Configuration

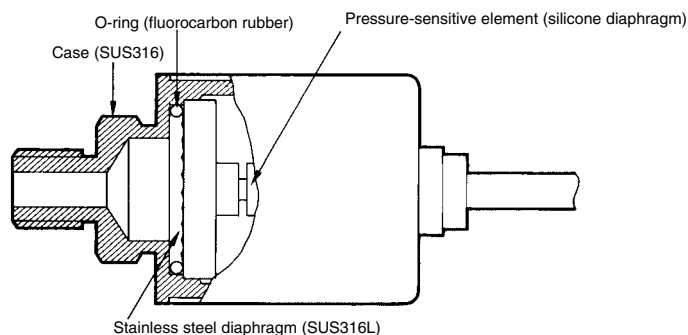


Operation

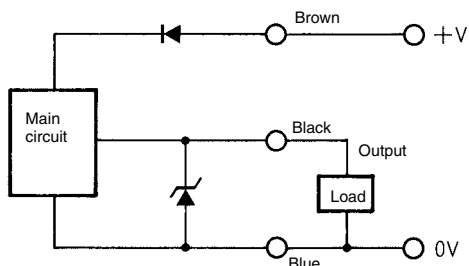

E8AA-M05

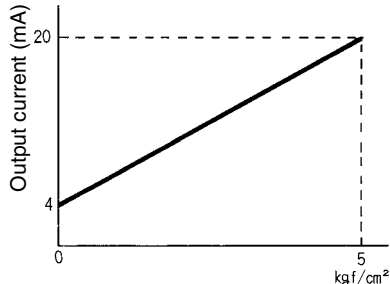


E8AA-M10

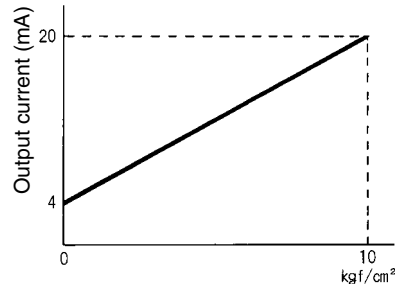

Dimensions

Note: All units are in millimeters unless otherwise indicated.

E8AA-M05
E8AA-M10

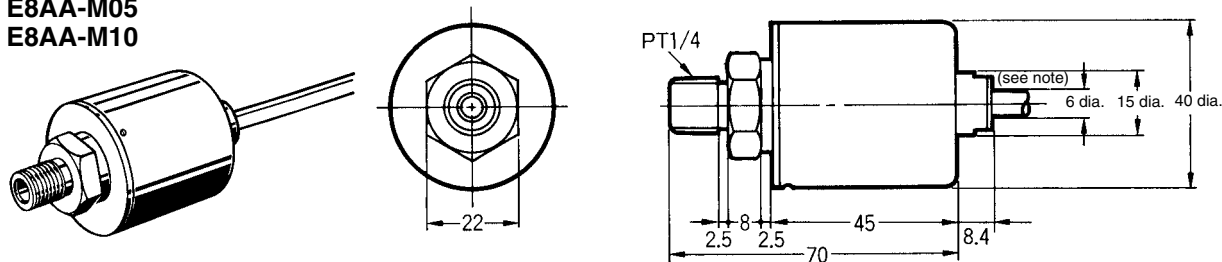

Note: Vinyl-insulated round cord, 6 dia. with 3 cores
Standard length: 2 m

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Precautions

Correct Use

Hollow Pipe

The cord has a hollow pipe in order to keep the pressure inside the Sensor the same as the atmospheric pressure. If the pipe is clogged, the accuracy of the Sensor may be lowered.

Do not bend or impose a heavy weight on the output cord.

Make sure that the tip of the output cord is open and not clogged with dust or water.

If it is necessary to cut the output cord, make sure that the tip of the hollow pipe is not clogged.

Diaphragms

If the diaphragms are damaged, the Unit will not operate properly. Do not insert a screwdriver or steel wire into the interior of the pressure-sensitive parts.

The characteristics of the Unit will change if foreign material is stuck to the stainless steel diaphragm.

Mounting

The mounting screw for the pressure leading part is a PT1/4 taper screw. Do not use any other type of screw.

Apply sealing tape to the PT1/4 screw part so that there will be no pressure leakage.

The most suitable wrench is 22 mm in size.

Make sure that the maximum tightening torque applied to mount the E8AA is 49 N • m (500 kgf • cm).

Do not use the E8AA for applications in which the E8AA comes into direct contact with medical or food products.

This document provides information mainly for selecting suitable models. Please read the Instruction Sheet carefully for information that the user must understand and accept before purchase, including information on warranty, limitations of liability, and precautions.

Cat. No. D069-E1-01A In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

Application Sensors Division
Sensing Devices and Components Division H.Q.
Shiokoji Horikawa, Shimogyo-ku,
Kyoto, 600-8530 Japan
Tel: (81)75-344-7068/Fax: (81)75-344-7107

Printed in Japan
1204-0.2M (0498) (A)

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS, OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased product.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

ERRORS AND OMISSIONS

The information in this catalog has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

COPYRIGHT AND COPY PERMISSION

This catalog shall not be copied for sales or promotions without permission.

This catalog is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this catalog in any manner, for any other purpose. If copying or transmitting this catalog to another, please copy or transmit it in its entirety.