SPECIFICATIONS

RoHS Compliant


Model Number: Part Number:

MD24B1 028866 S

SPEC NUMBER:26013793A00 May 14, 2012



Mechanical Drawing:

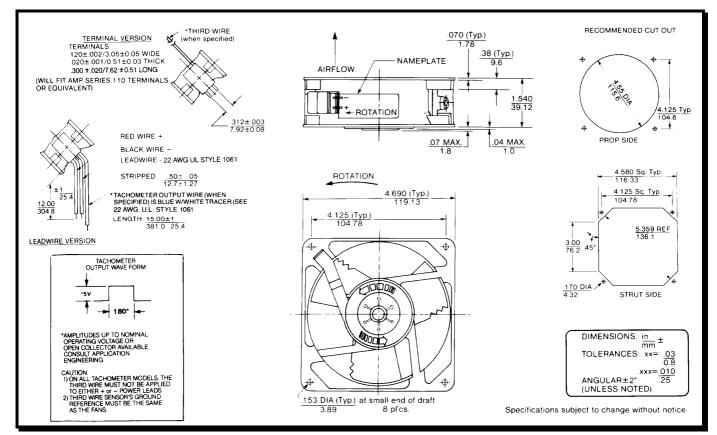

Motor:

Nominal Voltage Operating Voltage Range Running Current Locked Rotor Current Running Power Average Speed Bearings Air Flow Acoustic: = 24 vdc = 12 - 28 vdc = 0.250 amps = 0.750 amps = 6.0 watts = 3100 rpm = Ball = 110 CFM = 50.0 dBA

Construction:

Venturi: Die-Cast Zinc Alloy, Black Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 83,000 hours at 40° C.

Additional Features:

Brushless DC Motor Electronic Locked Rotor Protection Automatic Restart Capability Polarity Protected Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C Airflow from strut to propeller

Termination:

12" Lead wires, 22 AWG, UL 1061 Red = Fan Power (+) Black = Fan Ground (-)

Agency Approvals: UL,CE