

SPECIFICATIONS

RoHS Compliant


Model Number: MX3A1

Part Number: 028326

August 23, 2002



Mechanical Drawing:

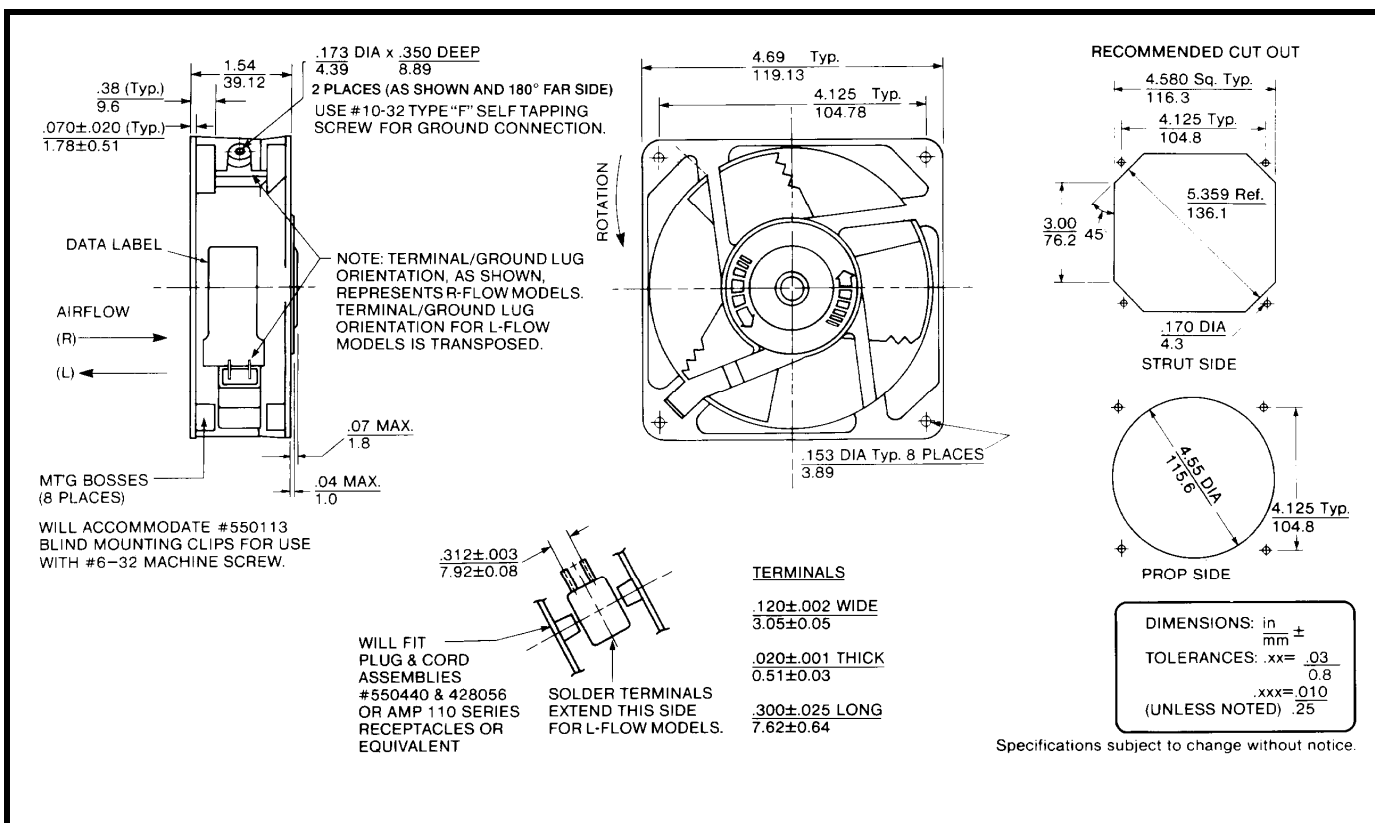

Motor:

Nominal Voltage = 220/230 VAC
 Frequency = 50/60 Hz
 Nominal Running Current = 0.100/ 0.090 amps
 Locked Rotor Current = 0.145/ 0.140 amps
 Running Power = 17/16 watts
 Average Speed = 2700/3100 RPM
 Bearings = Ball
 Air Flow = 98/115 CFM
 Acoustic = 45.6/50 dBA

Construction:

Venturi: Zinc Alloy, Black.
 Propeller: Plastic, Gray, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 55,000 hours at 40°C.

Additional Features:

Shaded pole induction motor
 Automatic Restart Capability
 Impedance Protection
 Operating Temperature: -10°C to 70°C
 Storage Temperature: -40°C to 85°C
 Right Flow Propeller

Termination:

2 Solder Terminals

Agency Approvals:

UL