SPECIFICATIONS


RoHS Compliant

Model Number: PT77B3 **Part Number:** 028312





Mechanical Drawing:

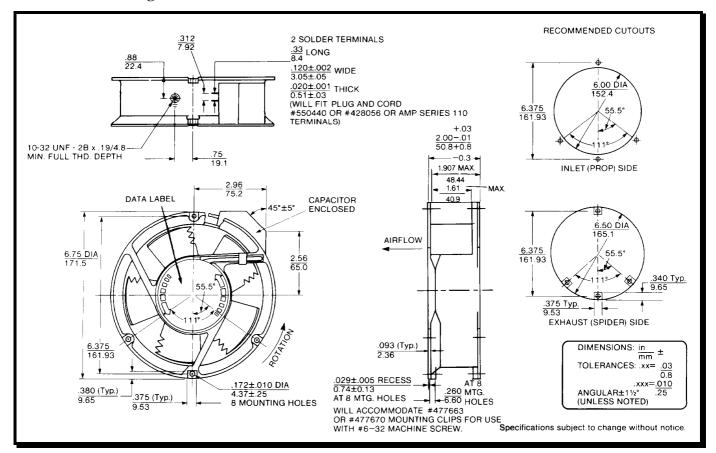

Motor:

Frequency = 50 / 60 HzNominal Voltage = 220 / 230 VACNominal Running Current = 0.130 / 0.140 amps

 $\begin{array}{ll} \text{Max. Locked Rotor Current} & = 0.250 \text{ amps} \\ \text{Running Power} & = 26 \, / \, 30 \text{ watts} \\ \text{Average Speed} & = 2880 \, / \, 3400 \text{ RPM} \end{array}$

Bearings = Ball

Air Flow = 200 / 235 CFM Acoustic = 50.3 / 54.0 dBA

Construction:

Venturi: Single Piece Die-Cast Aluminum, Black

Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 65,000 hours at 30°C.

Additional Features:

Permanent Split Capacitor Motor Half Speed Impedance Protection

Full Speed Automatic Reset Thermal Protector Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Termination:

2 Terminals

Agency Approvals:

UL