

Subminiature Fuse, 10 x 10 mm, 125 VAC, 125 VDC



UL 248-14 · 125VAC · 125VDC · Quick-Acting F

**Description**

- Low Breaking Capacity

Standards

- UL 248-14
- CSA C22.2 no. 248.14

Approvals

- UL File Number: E42088

References

Corresponding Fuseholder 231651


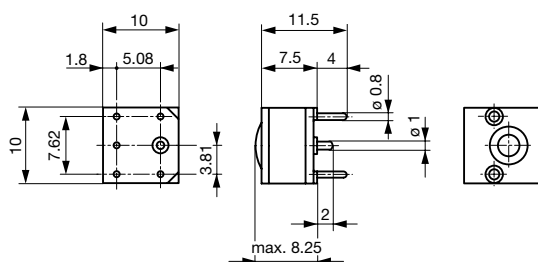
Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#),
[Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#),
[SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


Technical Data

Rated Voltage	125 VAC, 125 VDC
Rated current	1 - 5 A
Breaking Capacity	50 A
Characteristic	Quick-Acting F
Mounting	PCB, Through hole mounting
Admissible Ambient Air Temp.	-55 °C to 125 °C
Climatic Category	55/125/56 acc. to IEC 60068-1
Unit Weight	2 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 Type, Current, Circuits

Soldering Methods	Iron, Iron
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A

Dimensions
 10 mm


The PSC has a colour indication which facilitates a rapid localisation of the fault



Drilling diagram

Pre-Arcing Time

Rated Current In 1.5 x In min. 3.0 x In max.

1 A - 5 A	60 min	1 s
-----------	--------	-----

Variants

Rated Cur- rent [A]	Rated Vol- tage [VAC]	Rated Vol- tage [VDC]	Breaking Capacity	Voltage Drop 1.0 In typ. [mV]		Order Number
1	125	125	1)	100	●	7100.0160.xx
2	125	125	1)	80	●	7100.0170.xx
3	125	125	1)	70	●	7100.0180.xx
4	125	125	1)	70	●	7100.0190.xx
5	125	125	1)	70	●	7100.0200.xx

1) 50 A @ 125 VAC/DC

Packaging Unit .xx = .71 Magazine (10 pcs.)

Time-Current-Curves

