

FO-50360-L

4



3

2

1

HONEYWELL PART NUMBER
V15T16-CC100-K
PRODUCT CODE
CFW2039

REV	DOCUMENT	CHANGED BY	CHECK
A	0038670	VS 10APR08	BLR

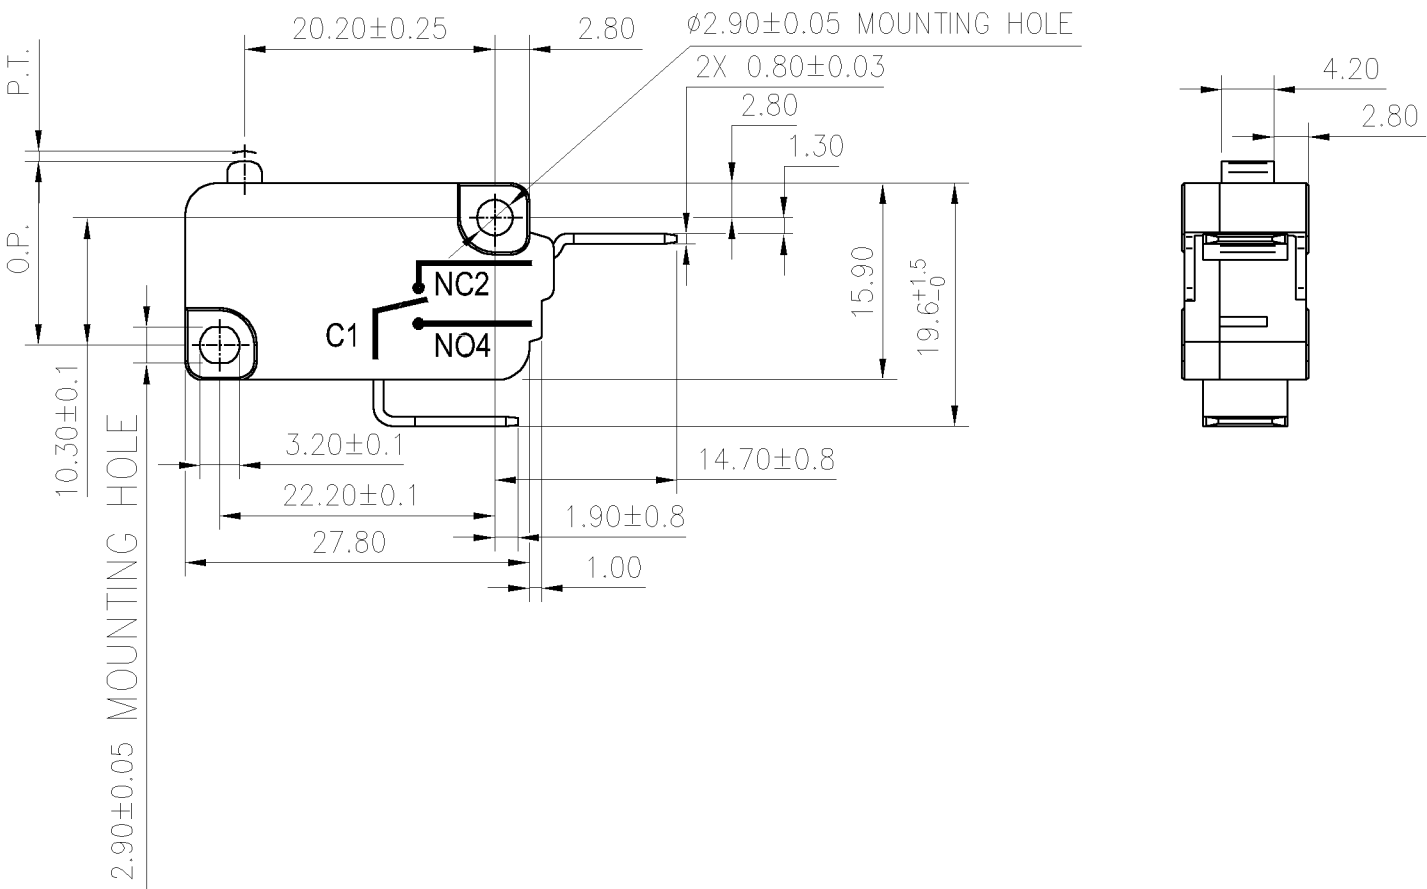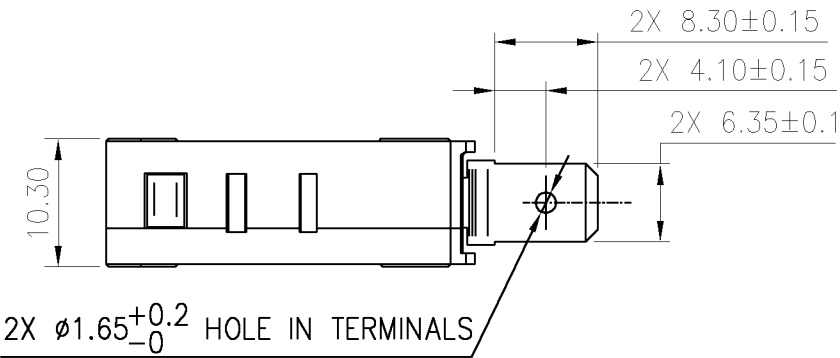

NOTES:
1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM TOLERANCES UNLESS NOTED:			DRAWN	KSR	01APR08	Honeywell					
		CONTACT ARRANGEMENT S.P.N.C					CHECK	RJ	01APR08						
OPERATING FORCE: 100gf MAX.				NO PLACE X ± ±			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE SWITCH - BASIC						
DIFFERENTIAL FORCE:				ONE PLACE .X ± ±											
RELEASE FORCE: 25gf MIN.				TWO PLACE .XX ± ± 0.40											
FREE POSITION:				THREE PLACE .XXX ± ±											
OPERATING POSITION: 14.7±0.5MM.				ANGLES X ± ± 2°			INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE BTYPE I CAGE CODE DRAWING NAME V15T16-CC100-KREV A						
PRE-TRAVEL: 1.6MM MAX.															
DIFFERENTIAL TRAVEL: 0.4MM MAX.															
OVER-TRAVEL: 0.8MM MIN.															
FULL OVERTRAVEL FORCE:															