

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

V7-1B17D8-022

CW-B4132

CATALOG LISTING

V7-1B17D8-022

REPLACES
RELEASE NO. PR-19124

M

ISSUE
3

REVISIONS

A	CO-76109	30 JAN 12
B	JWB 8 NOV 93	
B	0085964	
	SBH 30 JAN 12	

CHECK

30 JAN 12

CMH

CHECK

APR 91

APR 91

APR 91

APR 91



APR 91

APR 91

APR 91


RASTER

DRAWN

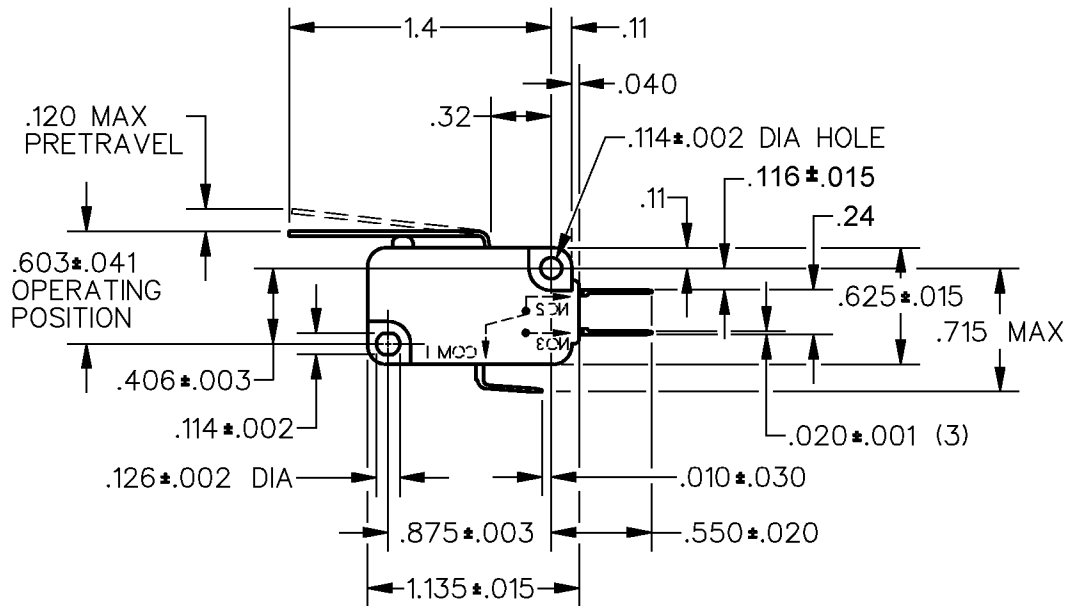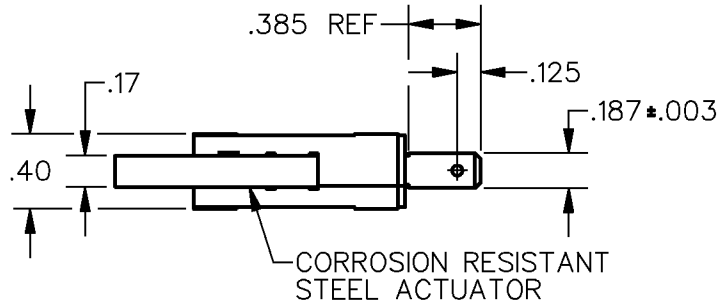

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 82 GRAMS MAX
RELEASE FORCE — — — — 8 GRAMS MIN
DIFFERENTIAL TRAVEL — — — .027 MAX
OVERTRAVEL — — — — — .067 MIN
RELEASE TRAVEL — — — — — .017 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L156 11A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"



SCALE NONE DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT