

CATALOG LISTING

M

ISSUE

5

REVISIONS

A	REL PR-18956	30 JAN 91
B	CO-69746	15 MAR 91
C	CO-76103	5 OCT 93
D	0085964	30 JAN 12

REPLACES X94127-V7

RELEASE NO. PR-18956

CHECK

30 JAN 91

CMH

CHECK

15 JAN 91

JAP

CHECK

11 JAN 91

B A B

DRAWN

MICRO SWITCH
 a Honeywell Division



FED.MFG.CODE 91929

SWITCH — BASIC

CATALOG LISTING


V7-1B17D8

CW-B4712

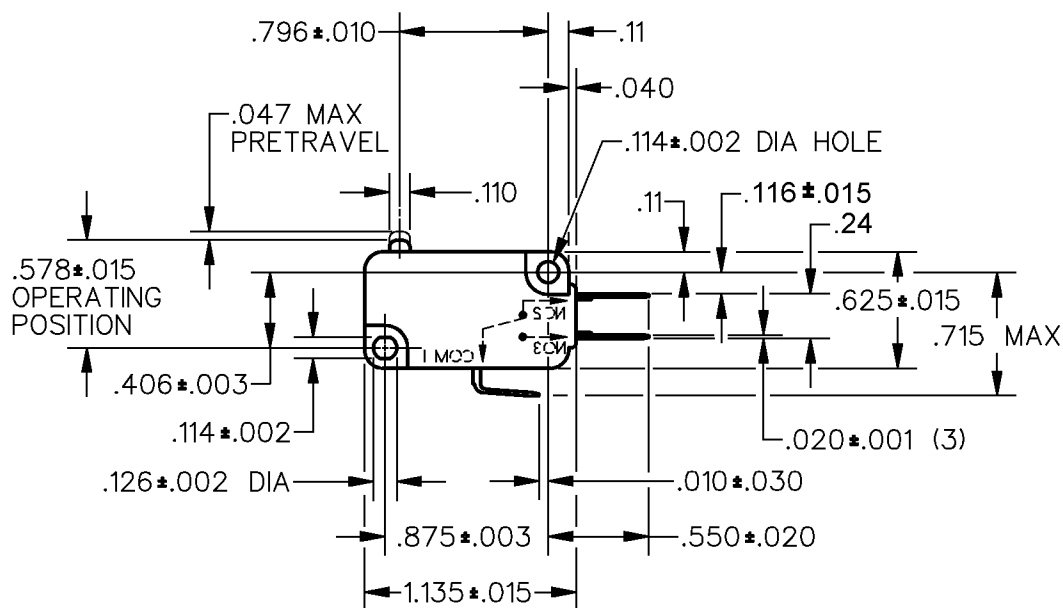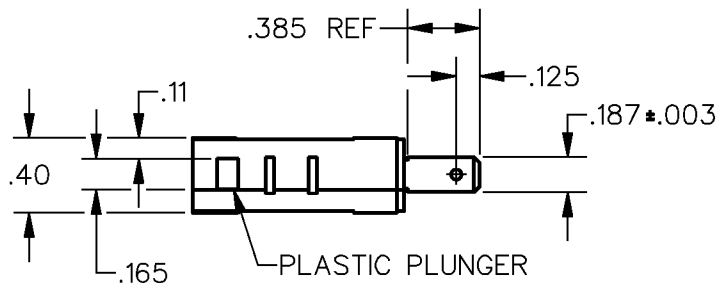

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 150 GRAMS MAX
 RELEASE FORCE — — — 25 GRAMS MIN
 RELEASE TRAVEL — — — .010 MIN
 DIFFERENTIAL TRAVEL — — .002—.010
 OVERTRAVEL — — — .050 MIN
 FREE POSITION — — — .625 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
 S P D T

L156 11A 1/3HP 125, 250 OR 277 VAC
 1/2A 125 VDC, 1/4A 250 VDC
 4A 125 VAC "L"



SCALE NONE DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030
 TWO PLACE (.00) ±.015
 THREE PLACE (.000) ±.005
 ANGLES ±

WEIGHT