
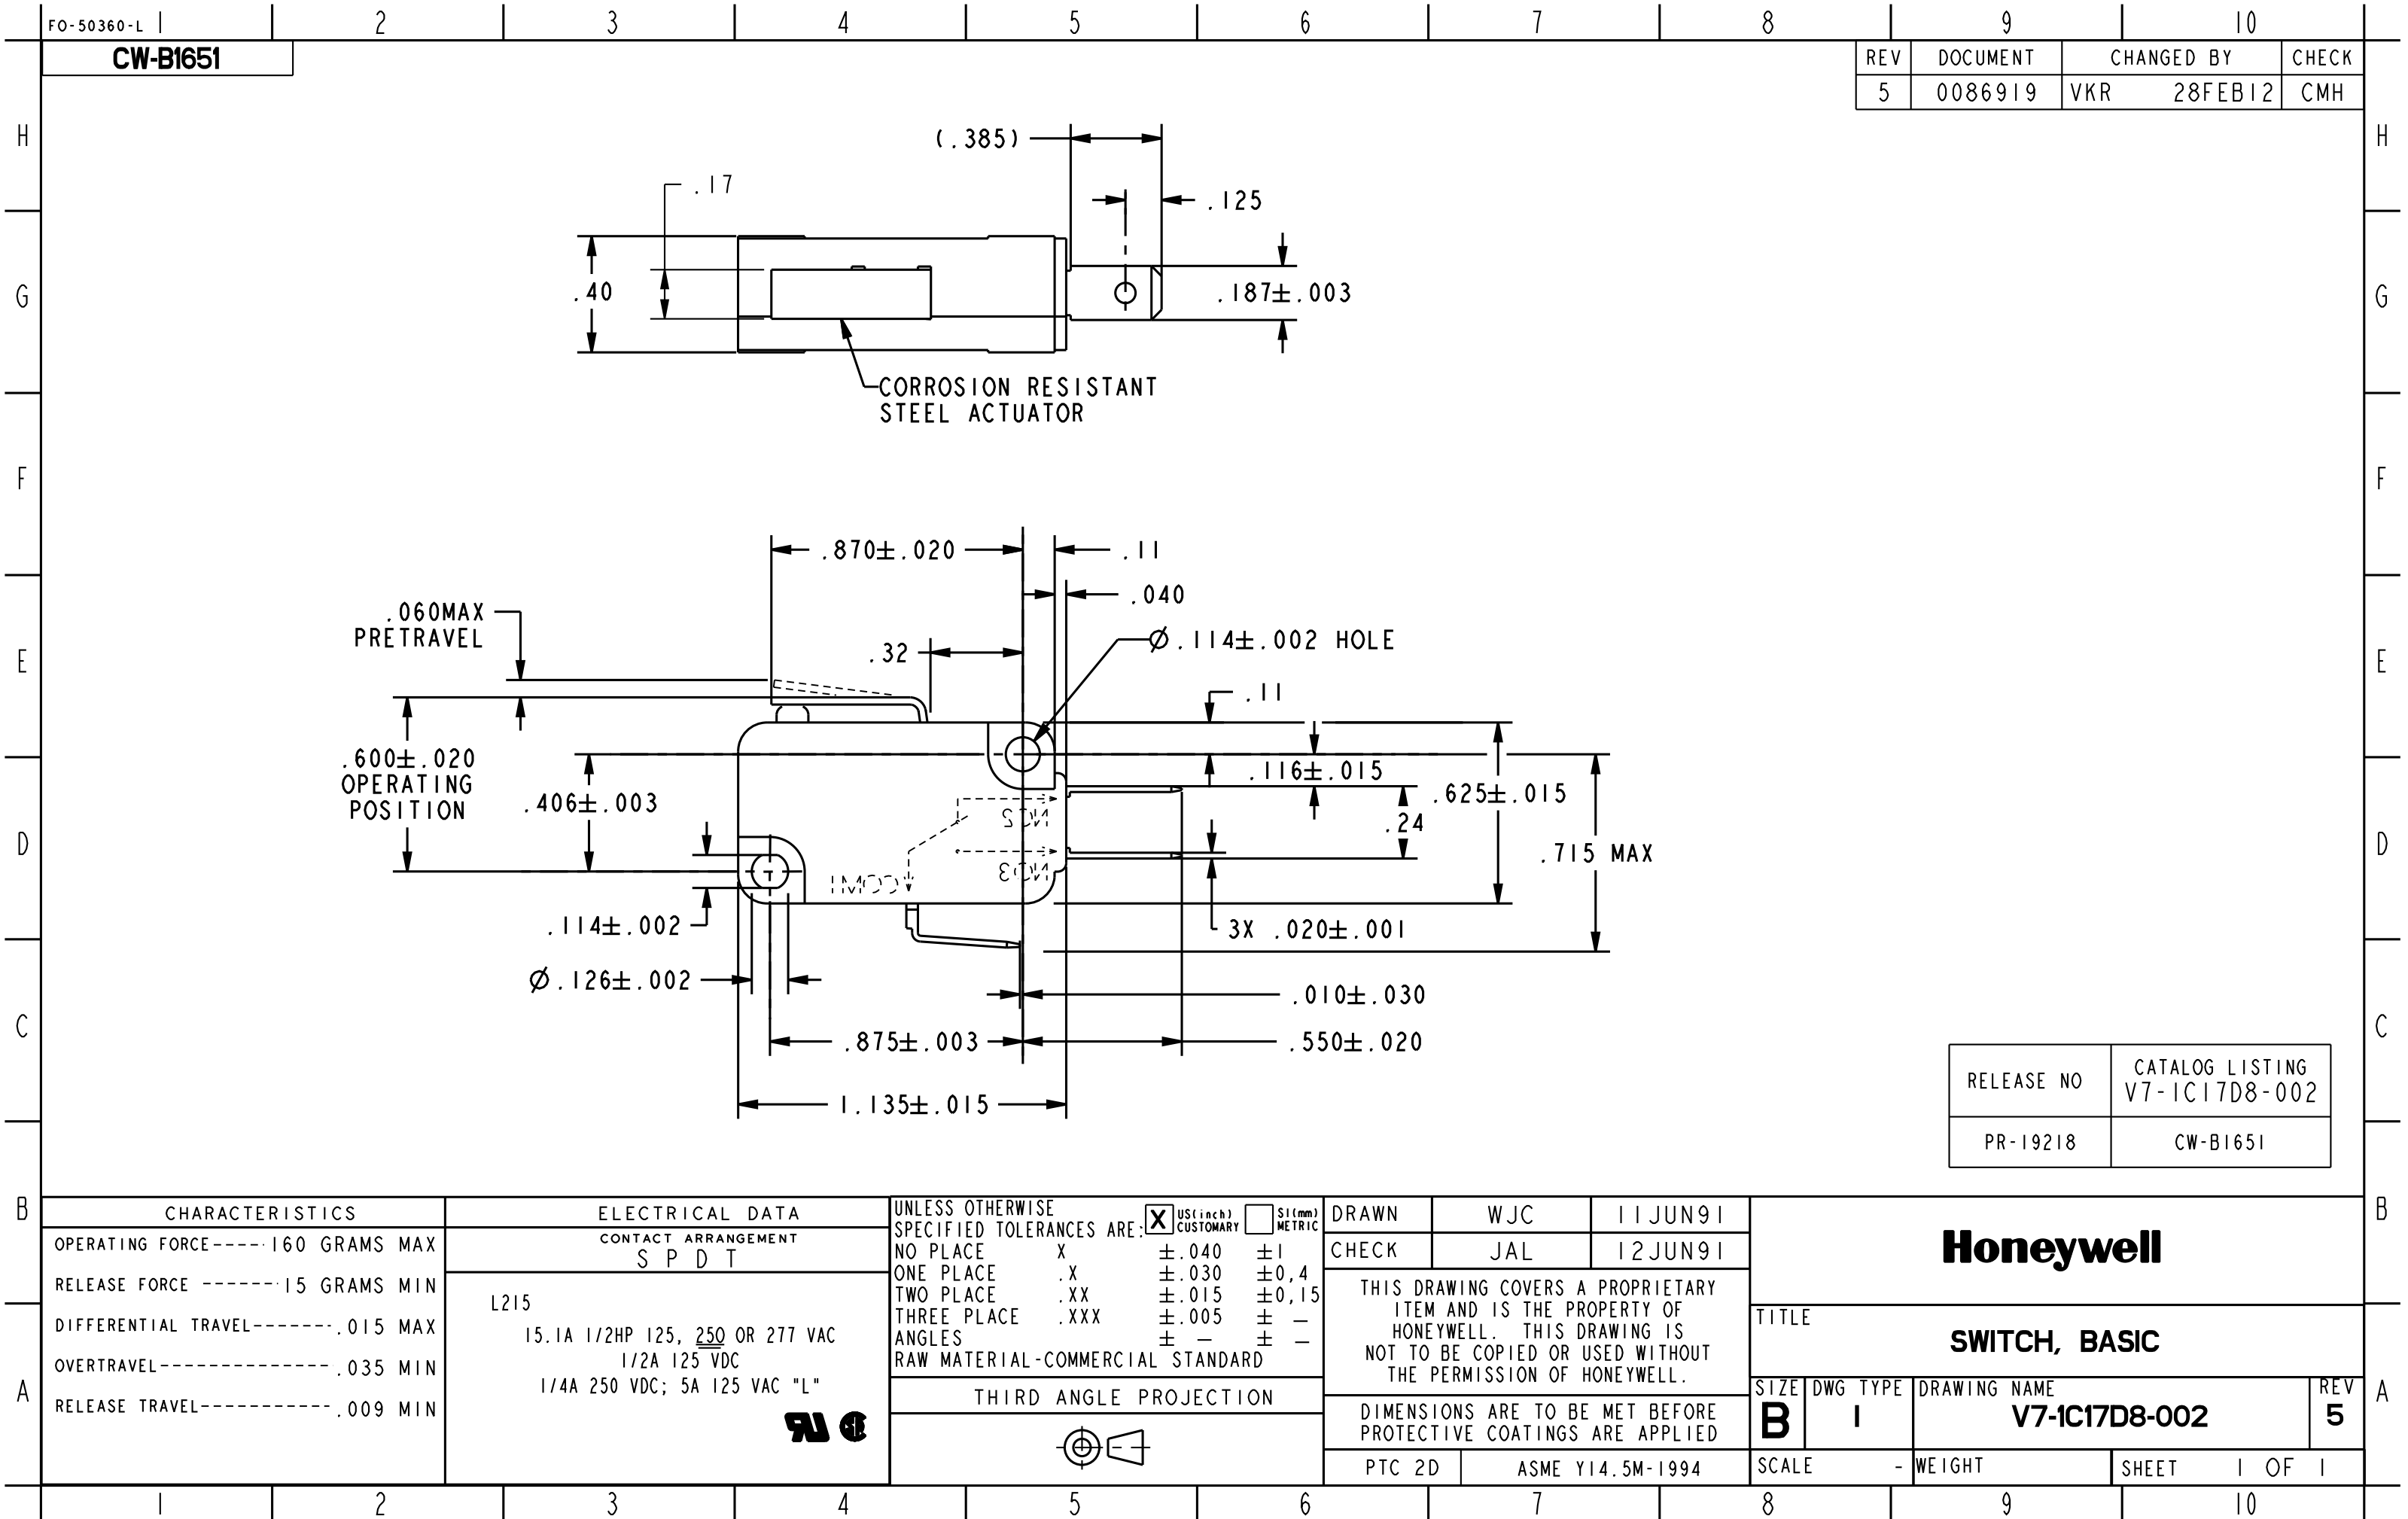




REV	DOCUMENT	CHANGED BY	CHECK
5	0086919	VKR 28FEB12	CMH

RELEASE NO	CATALOG LISTING
PR-19218	V7-1C17D8-002
	CW-B1651

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN	WJC	11 JUN 91
OPERATING FORCE-----160 GRAMS MAX		CONTACT ARRANGEMENT S P D T		☒ US (inch) CUSTOMARY ☐ SI (mm) METRIC		CHECK	JAL	12 JUN 91
RELEASE FORCE -----15 GRAMS MIN		L215 15.1A 1/2HP 125, <u>250</u> OR 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 5A 125 VAC "L" 		NO PLACE X ±.040 ±1		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
DIFFERENTIAL TRAVEL----- .015 MAX				ONE PLACE .X ±.030 ±0,4				
OVERTRAVEL----- .035 MIN				TWO PLACE .XX ±.015 ±0,15				
RELEASE TRAVEL----- .009 MIN				THREE PLACE .XXX ±.005 ± —				
						ANGLES ± — ± —		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED
				RAW MATERIAL-COMMERCIAL STANDARD		PTC 2D ASME Y14.5M-1994		
				THIRD ANGLE PROJECTION				
								

TITLE				
SWITCH, BASIC				
SIZE	DWG TYPE	DRAWING NAME		REV
B	I	V7-1C17D8-002		5
SCALE		-	WEIGHT	SHEET 1 OF 1