

CATALOG LISTING
V7-1D10D8
PAGE 1 OF 1

M	ISSUE	5

REVISIONS

A	CO-
	93311
	TSM
21	OCT 98

B	202141
JAH	
11 JAN 01	

C	0005782
RJ	
04 JUN 04	

D	0086919
VKR 28FEB12	

--	--

2

TER
RAWN

RAS	DF
-----	----

1

X110332-V7

REPLACES

—23274

RELEASE NO.

1

1

CHECK

N 04

0

СК	А
----	---

97



17 D

DCS

7	CHE
---	-----

7 DEC

CS

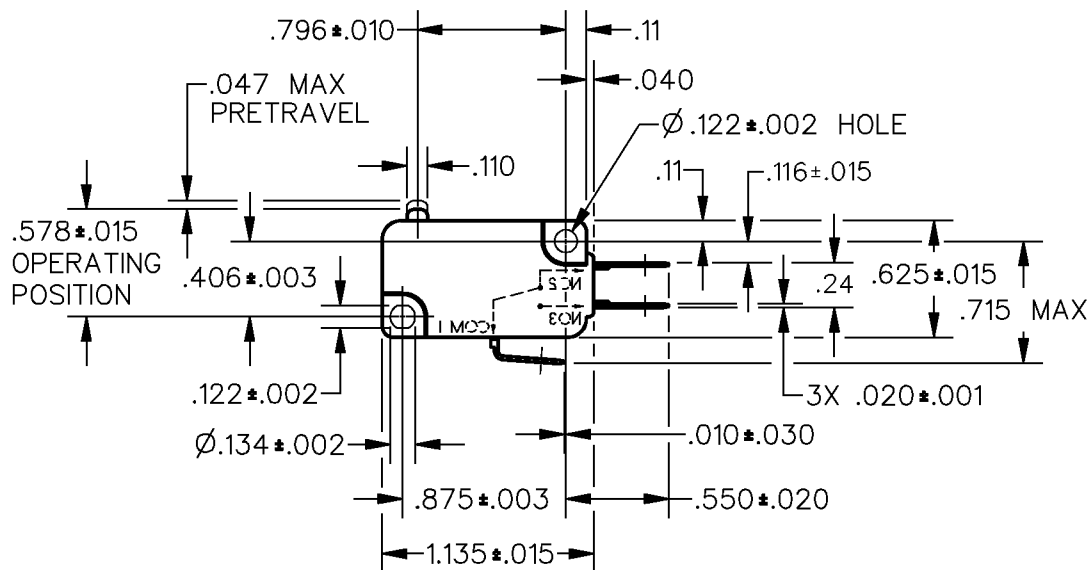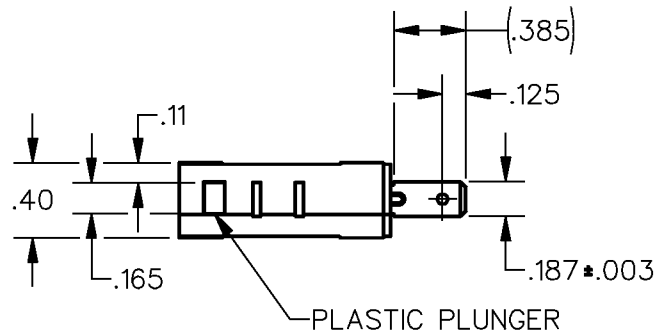


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 3 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE— — — 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE— — — 25 GRAMS MIN	L22 1A 125 VAC 	ONE PLACE (.0)	± .030
DIFFERENTIAL TRAVEL— — — .002—.010		TWO PLACE (.00)	± .015
OVERTRAVEL— — — — — .050 MIN		THREE PLACE (.000)	± .005
FREE POSITION— — — — — .625 MAX		ANGLES	±
RELEASE TRAVEL— — — — — .010 MIN		WEIGHT	