

CATALOG LISTING

V7-2A17D8-022

REPLACES

M

2

ISSUE

RELEASE NO. PR-19178

CHECK

CHECK

REVISIONS

A	CO	76420
	DCS	30 NOV 93

CHECK

20 MAY 91

CHECK



J A L 14 MAY 91

DRAWN

J A L 14 MAY 91

DDM/CAD


WJC

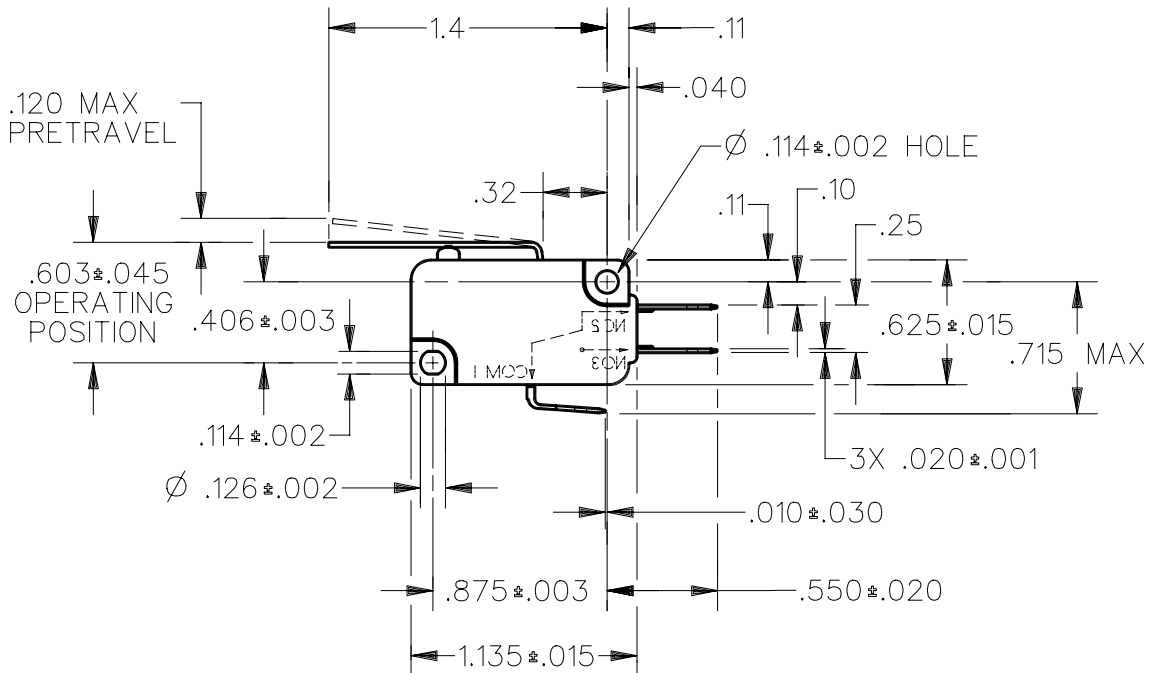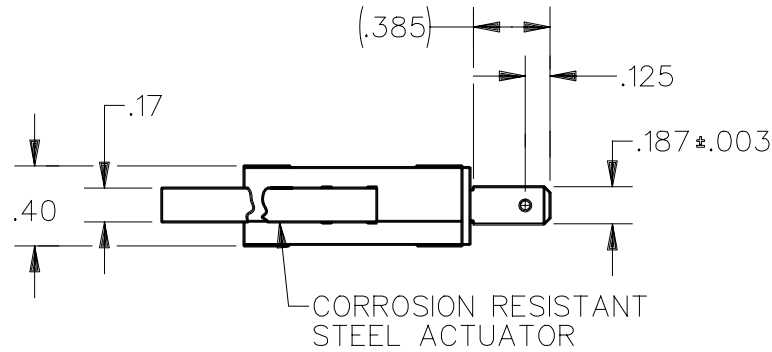

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 40 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± WEIGHT	
RELEASE FORCE — — — 3 GRAMS MIN	L162 5A 125, <u>250</u> , 277 VAC 1/10HP <u>250</u> VAC 		
DIFFERENTIAL TRAVEL — — — .030 MAX			
OVERTRAVEL — — — — — .065 MIN			
RELEASE TRAVEL — — — — — .017 MIN			

