Wireless External Dual Band Antenna for 5.15 GHz and 5.85 GHz Applications

Pulse Part Number W1028B



The W1028B is a classically designed antenna optimized for environments ranging from residential to commercial. It offers near dipolar radiation properties for wireless access points and devices on a WLAN (Wireless Local Area Network).

Pulse

Wireless networks, especially those located indoors, often have physical barriers which inhibit communication between wireless devices. These barriers cause blind spots, intermittent signal quality and interference. Selecting the correct external antenna can improve the range and reliability of wireless networks.

The W1028B antenna offers an economical solution for OEMs of wireless devices. These antennas are best suited for IEEE 802.11a applications.

Features

- · High frequency and high gain antenna
- For WLAN devices using WiFi (802.11a) and ISM 5.8 GHz band
- Omni directional radiation pattern provides broad 360° coverage
- RoHS Compliant Product

Applications

- WLAN / WIFI Routers
- Wireless Repeaters
- 802.11a OEM replacements

Electrical Specifications

Frequency [MHz]	5150 - 5850
Nominal Impedance [Ω]	50
VSWR	2:1 Max
Gain [dBi]	2
Radiation Pattern	Omni
Polarization	Linear Vertical
Power Rating [W]	3
Connector	SMA Male Reverse

Environmental Specifications

Operating Temperature [°C]	-20 to +65
Storage Temperature [°C]	-30 to +75

Mechanical Specifications

Color	Black
Overall Length [Inches/mm]	5.37 / 136.5

San Diego, CA 858 674 8100

Vancouver, WA 360 944 7551 Europe

Europe 49 7032 7806 0 Asia 86 755 33966678

66678 North Asia 886

North Asia 886 3 4356768 Chi


China 86 512 6807 9998


Wireless External Dual Band Antenna for 5.15 GHz and 5.85 GHz Applications

Pulse Part Number W1028B

Radiation Patterns

Horizontal Plane

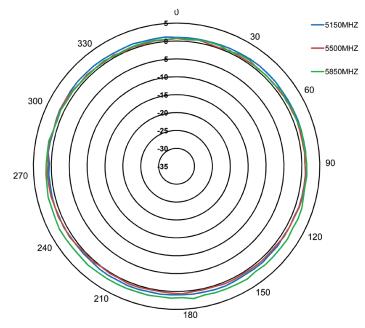

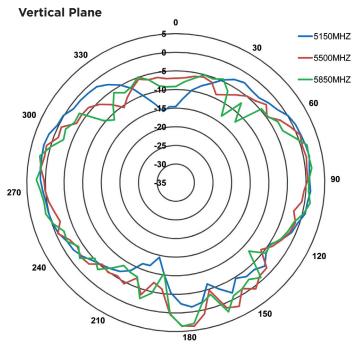

Application Notes

Omni-directional antennas provide a uniform, donutshaped, 360° radiation pattern. The omni-directional pattern is suitable for point-to-multipoint broadcasting in all directions. This antenna is primarily used for WLAN applications. However, it can also be

used for a variety of other applications withing the spec ified frequency range. When used as an access point, the antenna is ideally located at the center of the coverage area.

For More Information

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 U.S.A.

Tel: 858 674 8100

Fax: 858 674 8262

Larsen Brand Antennas 3611 NF 112th Avenue Vancouver, WA 98682

Pulse GmbH & Do. KG Zeppelinstrasse 15 Herrenberg Germany

Europe Headquarters

Tel: 49 7032 7806 0 Fax: 49 7032 7806 135

Asia Headquarters B402, Shenzhen Academy of Aerospace Technology Bldg. 10th Kejinan Road, High-Tech Zone Nanshan District, Shenzen, PR China 518057

Taiwan R. O. C.

Tel: 886 3 4356768

Fax: 886 3 4356823

Pulse North Asia 3F, No. 198, Zhongyuan Road Zhongli City, Taoyuan County 320

Pulse (Suzhou) Wireless Products Co, Inc.

99 Huo Ju Road, (#29 Bldg, 4th Phase) Suzhou New District Science & Tech Industrial Park Jiangsu Province, Suzhou 215009 PR China

Tel: 86 512 6807 9998 Fax: 86 512 6809 8023

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Opyright, 2010. Pulse Electronics, Inc. All rights reserved.

Tel: 86 755 33966678

Fax: 86 755 33966700

2

USA

Tel: 360 944 7551

Fax: 369 944 7556

pulseelectronics.com/products/antennas

