
www.ti.com

SCLS697A-DECEMBER 2005-REVISED APRIL 2008

# OCTAL TRANSPARENT D-TYPE LATCH WITH 3-STATE OUTPUTS

#### **FEATURES**

- Qualified for Automotive Applications
- Operating Range 2-V to 5.5-V V<sub>CC</sub>
- 3-State Outputs Directly Drive Bus Lines



#### **DESCRIPTION**

The SN74AHC573 is an octal transparent D-type latch designed for 2-V to 5.5-V  $V_{CC}$  operation.

When the latch-enable (LE) input is high, the Q outputs follow the data (D) inputs. When LE is low, the Q outputs are latched at the logic levels of the D inputs.

A buffered output-enable ( $\overline{OE}$ ) input can be used to place the eight outputs in either a normal logic state (high or low) or the high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased drive provide the capability to drive bus lines without interface or pullup components.

OE does not affect the internal operations of the latches. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

#### ORDERING INFORMATION(1)

T <sub>A</sub>	PACK	AGE <sup>(2)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
-40°C to 125°C	TSSOP - PW	Reel of 2000	SN74AHC573QPWRQ1	HA573Q

<sup>(1)</sup> For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.

# FUNCTION TABLE (EACH LATCH)

	INPUTS		OUTPUT
ŌĒ	LE	D	Q
L	Н	Н	Н
L	Н	L	L
L	L	X	$Q_0$
Н	X	X	Z




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

<sup>(2)</sup> Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.



### **LOGIC DIAGRAM (POSITIVE LOGIC)**

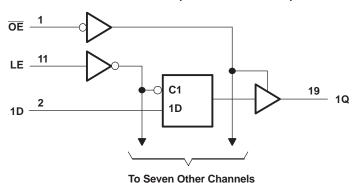

# Absolute Maximum Ratings(1)

over operating free-air temperature range (unless otherwise noted)

			MI	N MAX	UNIT
V <sub>CC</sub>	Supply voltage range		-0	.5 7	V
VI	Input voltage range <sup>(2)</sup>	-0	.5 7	V	
Vo	Output voltage range <sup>(2)</sup>	-0	$V_{\rm CC} + 0.5$	V	
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-20	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CC</sub>		±20	mA
lo	Continuous output current	$V_O = 0$ to $V_{CC}$		±25	mA
	Continuous current through V <sub>CC</sub> or G	GND		±75	mA
$\theta_{JA}$	Package thermal impedance (3)	PW package		83	°C/W
		Human-Body Model		1 (H1C)	kV
	ESD rating (4)	Charged-Device Model		1 (C5)	KV
		Machine Model		200 (M3)	V
T <sub>stg</sub>	Storage temperature range		-6	55 150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

<sup>(2)</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(3)</sup> The package thermal impedance is calculated in accordance with JESD 51-7.

<sup>(4)</sup> ESD protection level per AEC Q100 classification

www.ti.com

# Recommended Operating Conditions<sup>(1)</sup>

			–40°C to	125°C	-40°C to	85°C	
			MIN	MAX	MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage		2	5.5	2	5.5	V
		V <sub>CC</sub> = 2 V	1.5		1.5		
$V_{IH}$	High-level input voltage	V <sub>CC</sub> = 3 V	2.1		2.1		V
		V <sub>CC</sub> = 5.5 V	3.85		3.85		
		V <sub>CC</sub> = 2 V		0.5		0.5	
$V_{IL}$	Low-level input voltage	V <sub>CC</sub> = 3 V		0.9		0.9	V
		V <sub>CC</sub> = 5.5 V		1.65		1.65	
VI	Input voltage		0	5.5	0	5.5	V
Vo	Output voltage		0	V <sub>CC</sub>	0	V <sub>CC</sub>	V
		V <sub>CC</sub> = 2 V		-50		-50	μΑ
$I_{OH}$	High-level output current	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		-4		-4	A
		$V_{CC} = 5 V \pm 0.5 V$		-8		-8	mA
		V <sub>CC</sub> = 2 V		50		50	μΑ
$I_{OL}$	Low-level output current	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		4		4	A
		$V_{CC} = 5 V \pm 0.5 V$		8		8	mA
Λ±/Λ.,	Input transition vice or fall rate	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		100		100	20/1/
Δt/Δv	tt/Δv Input transition rise or fall rate	$V_{CC} = 5 V \pm 0.5 V$		20	20	20	ns/V
T <sub>A</sub>	Operating free-air temperature		-40	125	-40	85	°C

<sup>(1)</sup> All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

## **Electrical Characteristics**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	Т	A = 25°	С	–40°C to 125°C		–40°C to 85°C		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
		2 V	1.9	2		1.9		1.9		
	$I_{OH} = -50 \mu A$	3 V	2.9	3		2.9		2.9		
V <sub>OH</sub>		4.5 V	4.4	4.5		4.4		4.4		V
	$I_{OH} = -4 \text{ mA}$	3 V	2.58			2.48		2.48		
	$I_{OH} = -8 \text{ mA}$	4.5 V	3.94			3.8		3.8		
		2 V			0.1		0.1		0.1	
	$I_{OL} = 50 \mu A$	3 V			0.1		0.1		0.1	
V <sub>OL</sub>		4.5 V			0.1		0.1		0.1	V
	I <sub>OL</sub> = 4 mA	3 V			0.36		0.5		0.44	
	I <sub>OL</sub> = 8 mA	4.5 V			0.36		0.5		0.44	
l <sub>l</sub>	$V_I = 5.5 \text{ V or GND}$	0 V to 5.5 V			±0.1		±1		±1	μΑ
I <sub>OZ</sub>	$V_I = V_{IL}$ or $V_{IH}$ , $V_O = V_{CC}$ or GND	5.5 V			±0.25		±2.5		±2.5	μΑ
I <sub>CC</sub>	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V			4		40		40	μΑ
C <sub>i</sub>	$V_I = V_{CC}$ or GND	5 V		2.5	10				10	pF
Co	$V_O = V_{CC}$ or GND	5 V		3.5						pF

Copyright © 2005–2008, Texas Instruments Incorporated

Submit Documentation Feedback



#### **Timing Requirements**

over recommended operating free-air temperature range,  $V_{CC}$  = 3.3 V  $\pm$  0.3 V (unless otherwise noted) (see Figure 1)

		T <sub>A</sub> = 25	5°C	-40°C to 1	25°C	–40°C to 8	85°C	UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	UNII
t <sub>w</sub>	Pulse duration, LE high	5		5		5		ns
t <sub>su</sub>	Setup time, data before LE↓	3.5		3.5		3.5		ns
t <sub>h</sub>	Hold time, data after LE↓	1.5		1.5		1.5		ns

#### **Timing Requirements**

over recommended operating free-air temperature range,  $V_{CC}$  = 5 V  $\pm$  0.5 V (unless otherwise noted) (see Figure 1)

		T <sub>A</sub> = 2	5°C	–40°C to	125°C	–40°C to	85°C	LIMIT
		MIN	MAX	MIN	MAX	MIN	MAX	UNIT
t <sub>w</sub>	Pulse duration, LE high	5		5		5		ns
t <sub>su</sub>	Setup time, data before LE↓	3.5		3.5		3.5		ns
t <sub>h</sub>	Hold time, data after LE↓	1.5		1.5		1.5		ns

#### **Switching Characteristics**

over recommended operating free-air temperature range,  $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$  (unless otherwise noted) (see Figure 1)

PARAMETER	FROM TO LOAD		-	T <sub>A</sub> = 25°C			-40°0 125		–40°C to 85°C		UNIT
	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t <sub>PLH</sub>	D	Q	C <sub>1</sub> = 50 pF		9.5	14.5	1	16.5	1	16.5	
t <sub>PHL</sub>	Б	Q	CL = 50 pr		9.5	14.5	1	16.5	1	16.5	ns
t <sub>PLH</sub>	LE	Q	C <sub>1</sub> = 50 pF		10.1	15.4	1	17.5	1	17.5	
t <sub>PHL</sub>	LL	Q	O <sub>L</sub> = 30 pr		10.1	15.4	1	17.5	1	17.5	ns
t <sub>PZH</sub>	ŌĒ	Q	C - 50 pF		9.8	15	1	17	1	17	no
t <sub>PZL</sub>	OE	Q	$C_L = 50 \text{ pF}$		9.8	15	1	17	1	17	ns
t <sub>PHZ</sub>	ŌĒ	Q	$C_1 = 50 \text{ pF}$		10.7	14.5	1	16.5	1	16.5	
t <sub>PLZ</sub>	OE	γ	OL = 50 pr		10.7	14.5	1	16.5	1	16.5	ns

### **Switching Characteristics**

over recommended operating free-air temperature range,  $V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$  (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	TO (OUTPUT)	LOAD	=			–40°C to 125°C		–40°( 85°		UNIT
	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t <sub>PLH</sub>	D	Q	C = 50 pF		6	8.8	1	10	1	10	no
t <sub>PHL</sub>	Б	Q	$C_L = 50 \text{ pF}$		6	8.8	1	10	1	10	ns
t <sub>PLH</sub>	LE	Q	C = 50 pE		6.5	9.7	1	11	1	11	nc
t <sub>PHL</sub>	LE	Q	$C_L = 50 \text{ pF}$		6.5	9.7	1	11	1	11	ns
t <sub>PZH</sub>	ŌĒ	Q	C = 50 pF		6.7	9.7	1	11	1	11	no
t <sub>PZL</sub>	OE	Q	$C_L = 50 \text{ pF}$		6.7	9.7	1	11	1	11	ns
t <sub>PHZ</sub>	ŌĒ	Q	C = 50 pF		6.7	9.7	1	11	1	11	no
t <sub>PLZ</sub>	OE	Q	$C_L = 50 pF$		6.7	9.7	1	11	1	11	ns

# **Operating Characteristics**


 $V_{CC} = 5 \text{ V}, T_A = 25^{\circ}\text{C}$ 

	PARAMETER	TEST (	CONDITIONS	TYP	UNIT
C <sub>pd</sub>	Power dissipation capacitance	No load,	f = 1 MHz	16	pF

Submit Documentation Feedback



#### PARAMETER MEASUREMENT INFORMATION

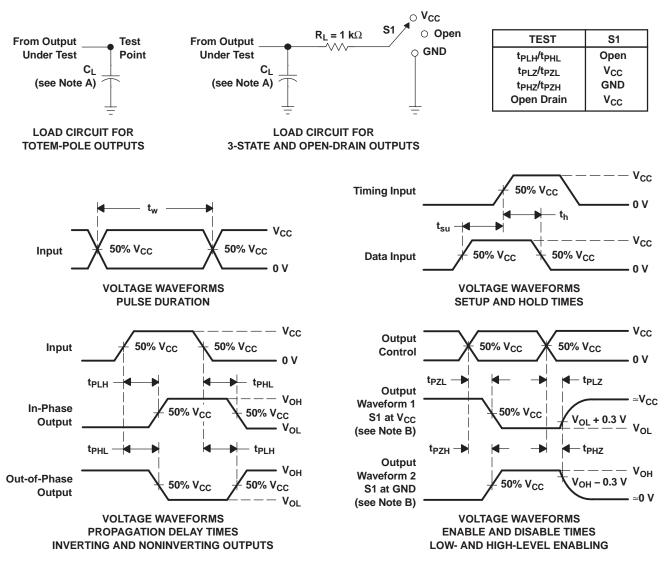

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_f \leq 3$  ns.  $t_f \leq 3$  ns.
- D. The outputs are measured one at a time, with one input transition per measurement.
- E. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuits and Voltage Waveforms



www.ti.com 24-Jan-2013

#### PACKAGING INFORMATION

Orderable Device	Status	Package Type	Package Drawing		Package Qty	Eco Plan	Lead/Ball Finish		Op Temp (°C)		Samples
	(1)		Drawing			(2)		(3)		(4)	
SN74AHC573QPWRG4Q1	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA573Q	Samples
SN74AHC573QPWRQ1	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA573Q	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free** (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between

the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> Only one of markings shown within the brackets will appear on the physical device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN74AHC573-Q1:

Catalog: SN74AHC573





www.ti.com 24-Jan-2013

• Military: SN54AHC573

NOTE: Qualified Version Definitions:

- Catalog TI's standard catalog product
- Military QML certified for Military and Defense Applications

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 14-Mar-2013


# TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74AHC573QPWRG4Q 1	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1
SN74AHC573QPWRQ1	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1

www.ti.com 14-Mar-2013



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74AHC573QPWRG4Q1	TSSOP	PW	20	2000	367.0	367.0	38.0
SN74AHC573QPWRQ1	TSSOP	PW	20	2000	367.0	367.0	38.0

PW (R-PDSO-G20)

# PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M—1994.
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
- E. Falls within JEDEC MO-153



# PW (R-PDSO-G20)

# PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

#### Products Applications

Audio www.ti.com/audio Automotive and Transportation www.ti.com/automotive Communications and Telecom **Amplifiers** amplifier.ti.com www.ti.com/communications **Data Converters** dataconverter.ti.com Computers and Peripherals www.ti.com/computers **DLP® Products** www.dlp.com Consumer Electronics www.ti.com/consumer-apps

DSP **Energy and Lighting** dsp.ti.com www.ti.com/energy Clocks and Timers www.ti.com/clocks Industrial www.ti.com/industrial Interface interface.ti.com Medical www.ti.com/medical logic.ti.com Logic Security www.ti.com/security

Power Mgmt power.ti.com Space, Avionics and Defense www.ti.com/space-avionics-defense

Microcontrollers microcontroller.ti.com Video and Imaging www.ti.com/video

RFID www.ti-rfid.com

OMAP Applications Processors <a href="www.ti.com/omap">www.ti.com/omap</a> TI E2E Community <a href="e2e.ti.com">e2e.ti.com</a>

Wireless Connectivity <u>www.ti.com/wirelessconnectivity</u>