


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



\* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

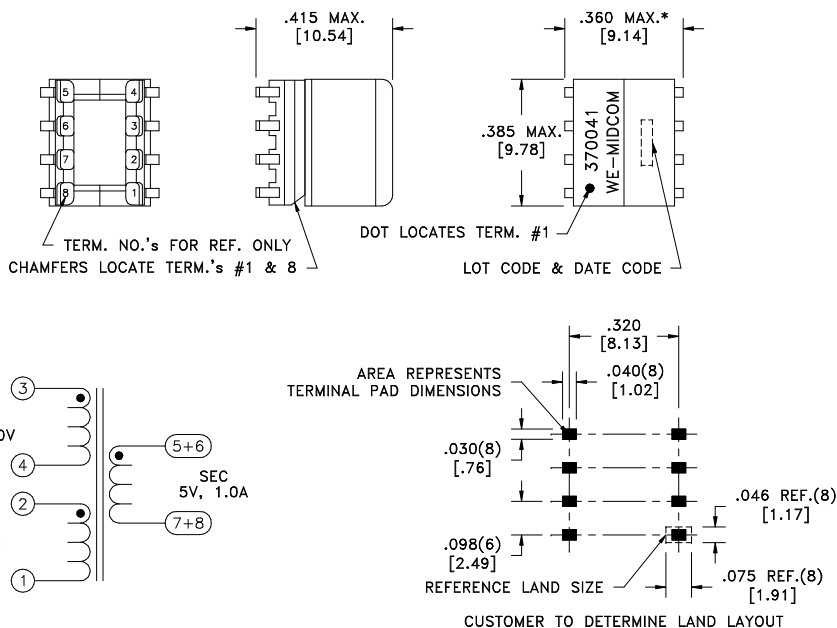

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.370 ohms ±15%
D.C. RESISTANCE	3-4 @20°C	0.190 ohms ±15%
D.C. RESISTANCE	5-7 tie(5+6, 7+8), @20°C	0.026 ohms ±15%
INDUCTANCE	3-4 10kHz, 100mVAC, Ls	50uH ±10%
6C SATURATION CURRENT	3-4 20% rolloff from initial	1.6A
LEAKAGE INDUCTANCE	3-4 tie(1+2, 5+6+7+8), 100kHz, 100mVAC, Ls	1.0uH max.
DIELECTRIC	3-5 tie(2+4), 1875VAC, 1 second	1500VAC, 1 minute
DIELECTRIC	3-6 tie(2+4), 1875VAC, 1 second	1500VAC, 1 minute
DIELECTRIC	2-3 500VAC, 1 second	400VAC, 1 minute
TURNS RATIO	(3-4):(5-7)	3:1, ±1%
TURNS RATIO	(3-4):(6-8)	3:1, ±1%
TURNS RATIO	(3-4):(2-1)	3:1, ±1%

6B GENERAL SPECIFICATIONS:  
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

REV.	DATE	Packaging Specifications Method: <b>Tape &amp; Reel</b> PKG-0410 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1°      Decimals: ±.005 [.13] Fractions: ±1/64      Footprint: ±.005 [.13]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>750370041</b>
6C	10/10					
6B	9/09					
6A	9/08	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750370041	SPECIFICATION SHEET 1 OF 1