


1 2 3 4 5 6 7

A
B
C
D
E
F
G
H

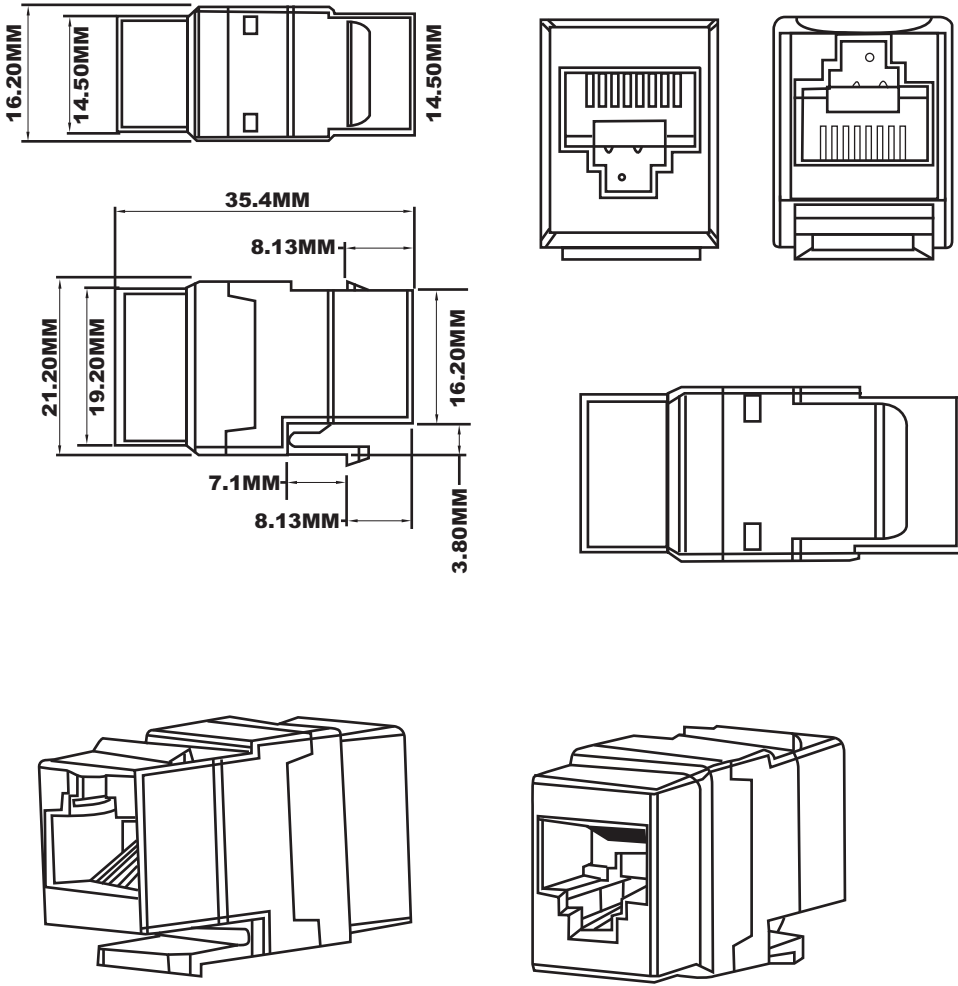

Material:

- Housing: PC UL94V-0
- Insert Material: PBT+20%GF UL94V-0
- PCB Material: FR-4 (Thickness 1.6MM)
- Contact Material: Phosphor Bronze Stamp Pin T=0.50MM
- IDC Contact Material: Phosphor Bronze 50µ" Gold T=0.50MM

Electrical:

- Voltage Rating: 125V AC RMS
- Current Rating: 1.5 AMP
- Contact Resistance: 100MΩ Max.
- Insulation Resistance: 1,000MΩ Min. @ 500V DC
- Dielectric Strength: 750V AC RMS 60Hz, 1 Min.

Environmental:

- Storage: -40°C ~ +85°C
- Operational Temperature: 0°C ~ +70°C
- Conform to TIA/EIA 568 B.2-1
- Mates with modular plug conforming to FCC part 68, Subpart F



Scale	1:1						Name
TOLERANCE						Drawn	12.20.11
X.X	±0.40					Approved	Chappell
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
		Modification		Date	Name		

Item No.		A-TA3534-R
Title		
Keystone Jack Cat5e, 50µ", RJ45 <=> RJ45, F-Thru Slim Style, Black		
Drawing No.		rev00
Replace		
Sheet		

1 2 3 4 5 6 7